



EVQ4436A-R-00A

45V, 6A, Low I_Q, Synchronous, Step-Down Converter Evaluation Board

DESCRIPTION

The EVQ4436A-R-00A evaluation board is designed to demonstrate the capabilities of MPS's MPQ4436A-AEC1 and MPQ4436A.

The MPQ4436A is a frequency-configurable, synchronous, step-down, switching regulator with integrated, internal high-side and low-side power MOSFETs. It provides up to 6A of highly efficient output, with current mode control for fast loop response.

The wide 3.3V to 45V input range accommodates a variety of step-down applications in an automotive input environment. A 1.7 μ A shutdown mode quiescent current allows the part to be used in battery-powered applications.

High power conversion efficiency over a wide load range is achieved by scaling down the switching frequency under light-load conditions to reduce switching and gate driver losses.

Frequency foldback prevents inductor current runaway during start-up. Thermal shutdown provides reliable, fault-tolerant operation. High duty cycle and low dropout mode are also provided for automotive cold crank conditions.

ELECTRICAL SPECIFICATIONS

Parameter	Symbol	Value	Units
Input voltage	V _{EMI}	3.3 to 45	V
Output voltage	V _{OUT}	3.3	V
Output current	I _{OUT}	6	A

FEATURES


- Wide 3.3V to 45V Operating Voltage Range
- 6A Continuous Output Current
- 1.7 μ A Low Shutdown Supply Current
- 18 μ A Sleep Mode Quiescent Current
- Internal 48m Ω High-Side and 20m Ω Low-Side MOSFETs
- 350kHz to 530kHz Programmable Switching Frequency for Car Battery Applications
- Synchronize to External Clock
- Multi-Phase Capability
- Out-of-Phase Synchronized Clock Output
- Frequency Spread Spectrum (FSS) for Low EMI
- Symmetric V_{IN} for Low EMI
- Power Good Output
- External Soft Start
- 100ns Minimum On Time
- Selectable Advanced Asynchronous Mode (AAM) or Forced Continuous Conduction Mode (FCCM)
- Low-Dropout Mode
- Hiccup Over-Current Protection
- Available in a QFN-20 (4mmx4mm) Wettable Flank Package
- Available in AEC-Q100 Grade 1

APPLICATIONS

- Infotainment
- Clusters
- Advanced Driver Assistance Systems (ADAS)
- Industrial Power Systems

All MPS parts are lead-free, halogen-free, and adhere to the RoHS directive. For MPS green status, please visit the MPS website under Quality Assurance. "MPS", the MPS logo, and "Simple, Easy Solutions" are trademarks of Monolithic Power Systems, Inc. or its subsidiaries.

EVQ4436A-R-00A EVALUATION BOARD

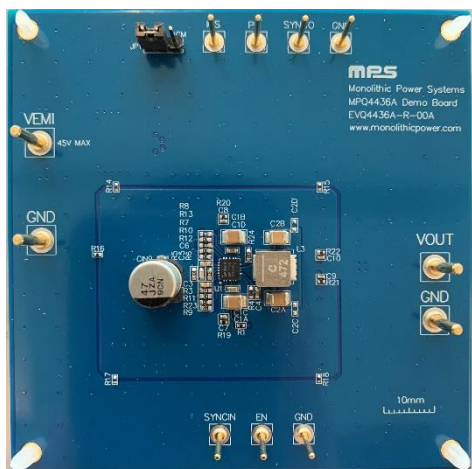


(LxWxH) 9cmx9cmx1.3cm

Board Number	MPS IC Number
EVQ4436A-R-00A	MPQ4436AGR-AEC1

Efficiency vs. Load Current

$V_{OUT} = 3.3V$, AAM, $f_{sw} = 470kHz$

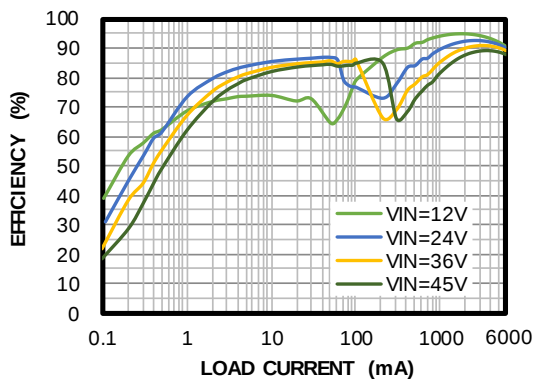

QUICK START GUIDE

1. Connect the load terminals to:
 - a. Positive (+): VOUT
 - b. Negative (-): GND
2. Set the load current between 0A and 6A. Electronic loads represent a negative impedance to the regulator. If they are set to an exceedingly high current, it may trigger over-current protection (OCP) or short current protection (SCP).
3. Preset the power supply output between 3.3V and 45V, then turn it off.
4. If long cables (>0.5m total) are used between the source and the EVB, install a damping capacitor at the input terminals. This is highly recommended when $V_{EMI} \geq 24V$.
3. Connect the power supply output terminals to:
 - a. Positive (+): VEMI
 - b. Negative (-): GND
4. Turn the power supply on. The board should automatically start up. The default V_{OUT} is 3.3V.
5. To use the enable function, apply a digital input to the EN pin. Drive EN above 1V to turn the regulator on; drive EN below 0.85V to turn it off.
6. To use the sync function, apply a 350kHz to 530kHz external clock to the SYNCIN pin to synchronize the internal clock's rising edge.
7. JP1 selects forced continuous conduction mode (FCCM) or advanced asynchronous mode (AAM). Connect pin 2 (mode) to pin 3 (VCC) of JP1 to force the MPQ4436A into FCCM. Connect pin 1 (GND) to pin 2 (mode) of JP1 to force the MPQ4436A into AAM.

EVALUATION BOARD SCHEMATIC

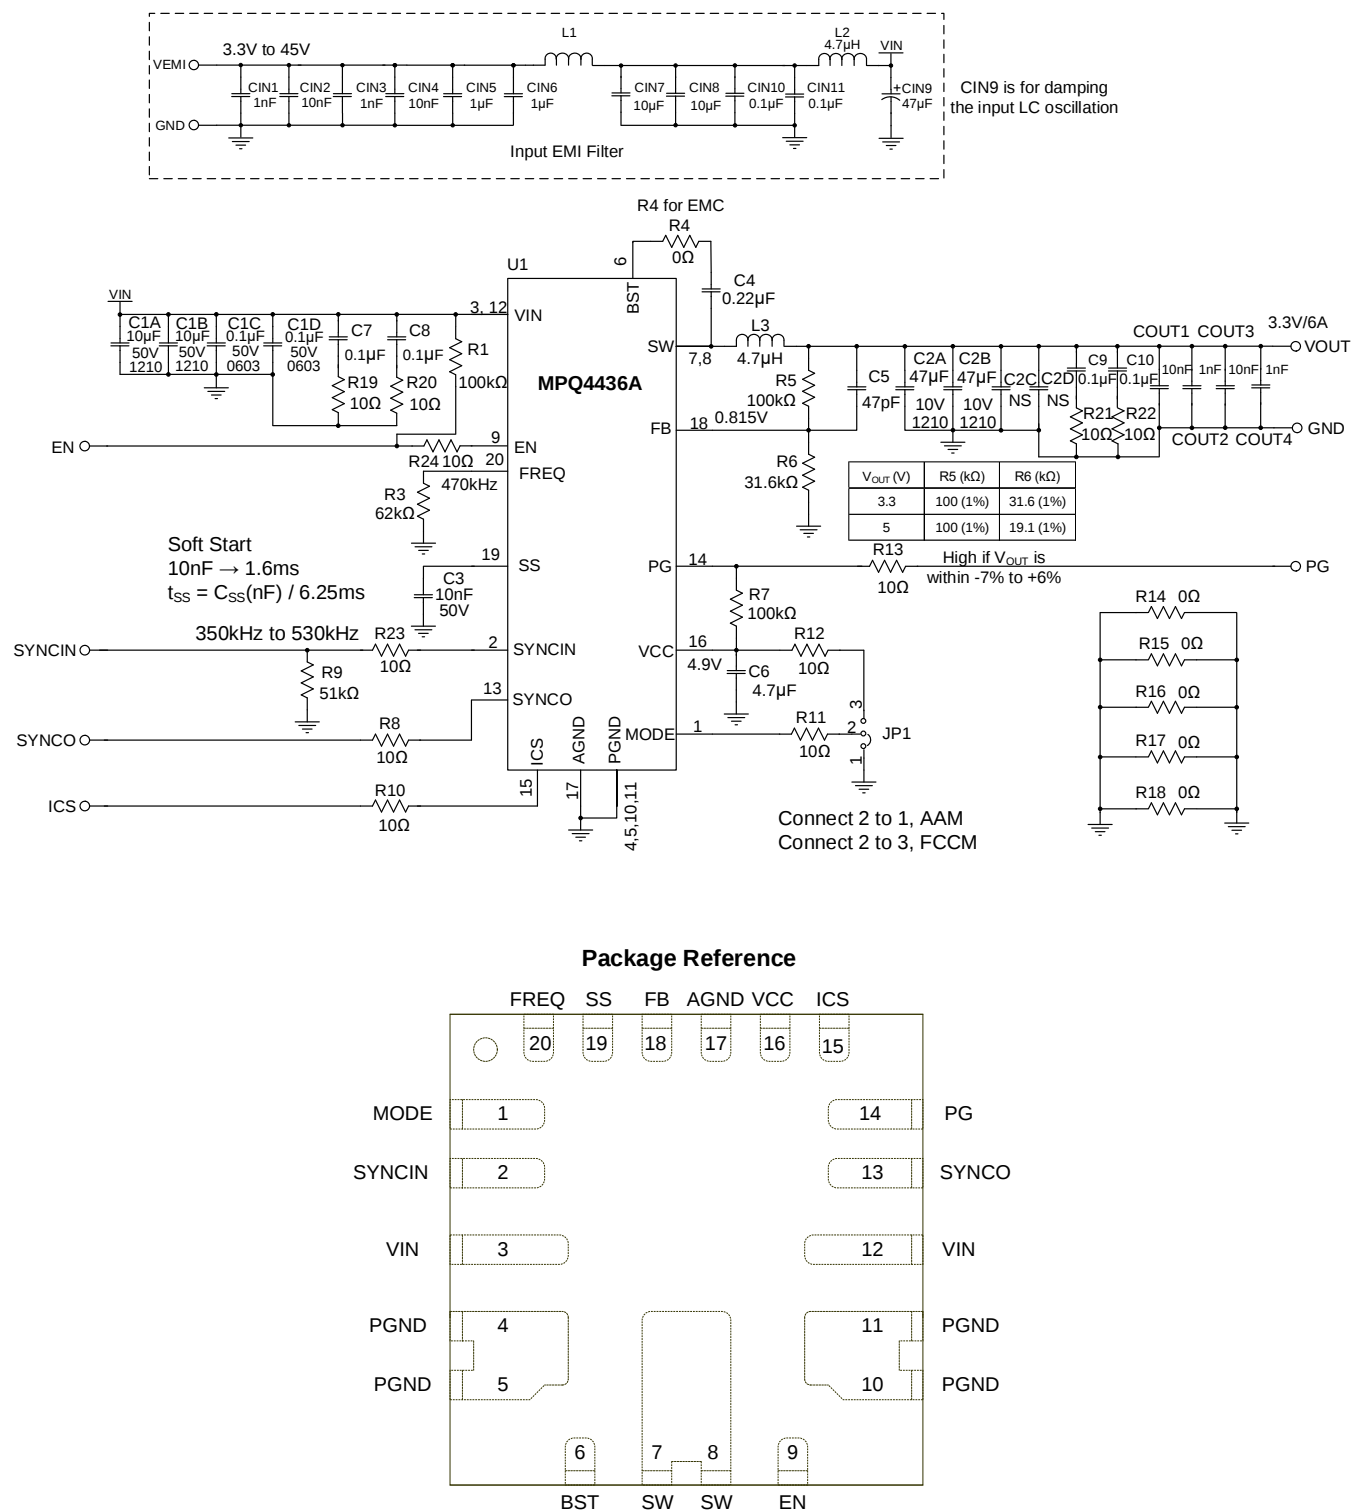


Figure 1: Evaluation Board Schematic

EVQ4436A-R-00A BILL OF MATERIALS

Qty	Ref	Value	Description	Package	Manufacturer	Manufacturer PN
4	CIN1, CIN3, COUT2, COUT4	1nF	Ceramic capacitor, 50V, X7R	0603	Murata	GRM216R71H102KA01
5	CIN2, CIN4, C3, COUT1, COUT3	10nF	Ceramic capacitor, 50V, X7R	0603	Murata	GRM188R71H103KA01D
2	CIN5, CIN6	1µF	Ceramic capacitor, 50V, X7R	0805	Murata	GRM21BR71H105KA12L
2	CIN7, CIN8	10µF	Ceramic capacitor, 50V, X5R	1206	Murata	GRM31CR61H106KA12L
1	CIN9	47µF	Aluminum capacitor, 63V	SMD	Panasonic	EEHZA1J470P
2	C1A, C1B	10µF	Ceramic capacitor, 50V, X7R	1210	Murata	GRM32ER71H106KA12L
4	CIN10, CIN11, C1C, C1D	0.1µF	Ceramic capacitor, 50V, X7R	0603	Murata	GCJ188R71H104KA12D
2	C2A, C2B	47µF	Ceramic capacitor, 10V, X5R	1210	Murata	GRM32ER61A476KE20L
1	C4	0.22µF	Ceramic capacitor, 16V, X7R	0603	Murata	GRM188R71C122KA01D
1	C5	47pF	Ceramic capacitor, 50V, COG	0603	TDK	C1608C0G1H470J
1	C6	4.7µF	Ceramic capacitor, 10V, X5R	0603	Murata	GRM188R61A475KE15D
4	C7, C8, C9, C10	0.1µF	Ceramic capacitor, 50V, X7R	0402	Murata	GRM155R71H104KE14D
2	C2C, C2D	NS				
1	L1		Magnetic bead, 6A	1806	Murata	BLM41PG600SN1L
1	L2	4.7µH	Inductor, 4.7µH, 31.5mΩ, 6A	SMD	Cyntec	VCMT063T-4R7MN5T-99
1	L3	4.7µH	Inductor, 4.7µH, 14.4mΩ, 11A	SMD	Coilcraft	XAL6060-472ME
1	R1	100kΩ	Film resistor, 1%	0402	Yageo	RC0402FR-07100KL
1	R3	62kΩ	Film resistor, 1%	0603	Yageo	RC0603FR-062KL
1	R4	0Ω	Film resistor, 5%	0603	Yageo	RC0603JR-070RL
2	R5, R7	100kΩ	Film resistor, 1%	0603	Yageo	RC0603FR-07100KL
1	R6	32.4kΩ	Film resistor, 1%	0603	Yageo	RC0603FR-0732K4L
7	R8, R10, R11, R12, R13, R23, R24	10Ω	Film resistor, 1%	0603	Yageo	RC0603FR-0710RL
1	R9	51kΩ	Film resistor, 1%	0603	Yageo	RC0603FR-0751KL
5	R14, R15, R16, R17, R18	0Ω	Film resistor, 1%	0402	Yageo	RC0402FR-070RL

EVQ4436A-R-00A BILL OF MATERIALS (continued)


Qty	Ref	Value	Description	Package	Manufacturer	Manufacturer PN
4	R19, R20, R21, R22	10Ω	Film resistor, 5%	0402	Yageo	RC0402FR-0710RL
1	U1	MPQ4436A	Step-down converter	QFN-20 (4mmx 4mm)	MPS	MPQ4436AGR-AEC1
1	JP1		3-pin connector, 2.54mm		Any	
4	VEMI, GND, VOUT, GND	Test point	2.0 golden pin		Custom	
7	SYNCIN, EN, GND, ICS, PG, SYNCO, GND	Test point	1.0 golden pin		Custom	

EVB TEST RESULTS

Performance curves and waveforms are tested on the evaluation board. $V_{IN} = 12V$, $V_{OUT} = 3.3V$, $L = 4.7\mu H$, $f_{SW} = 470kHz$, $T_A = 25^\circ C$, unless otherwise noted.


Efficiency vs. Load Current

AAM

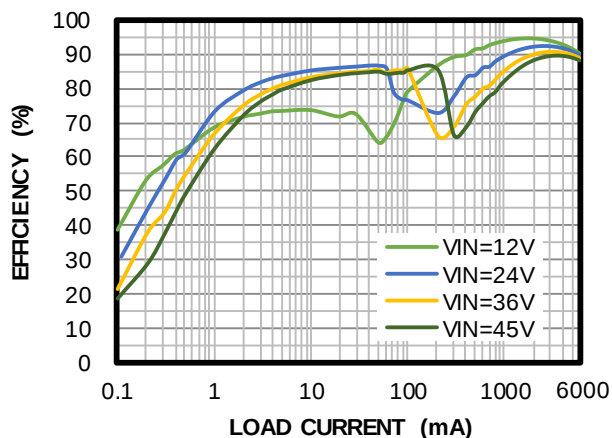


Efficiency vs. Load Current

CCM

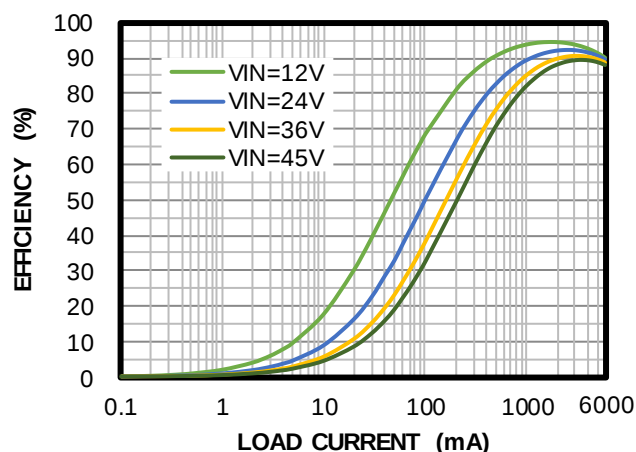


Efficiency vs. Load Current

(Extreme light loads) AAM

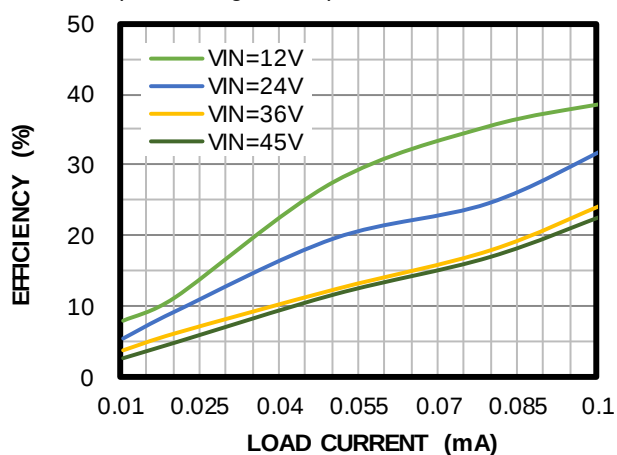

Efficiency vs. Load Current

(Extreme light loads) FCCM

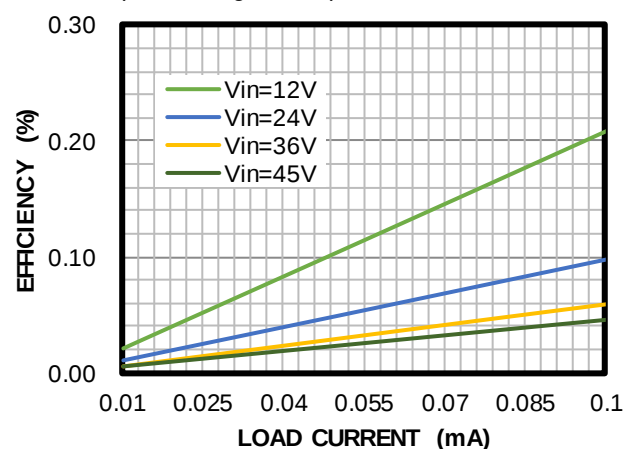

EVB TEST RESULTS (continued)

Performance curves and waveforms are tested on the evaluation board. $V_{IN} = 12V$, $V_{OUT} = 3.3V$, $L = 4.7\mu H$, $f_{SW} = 470kHz$, AAM, $T_A = 25^\circ C$, unless otherwise noted.


Steady State

 $I_{OUT} = 0A$, AAM

CH3: V_{PG}
5V/div.

CH1: V_{SW}
5V/div.

CH2: V_{OUT}/AC
20mV/div.

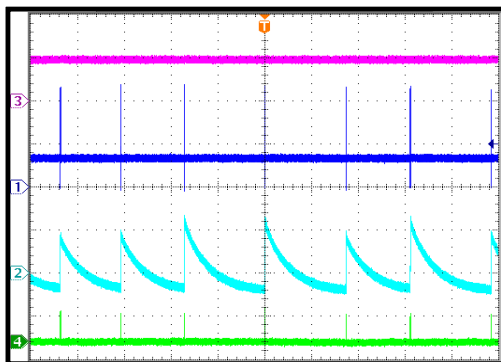CH4: I_L
1A/div.


40ms/div.


Steady State

 $I_{OUT} = 0A$, FCCM

CH3: V_{PG}
5V/div.

CH1: V_{SW}
5V/div.

CH2: V_{OUT}/AC
10mV/div.

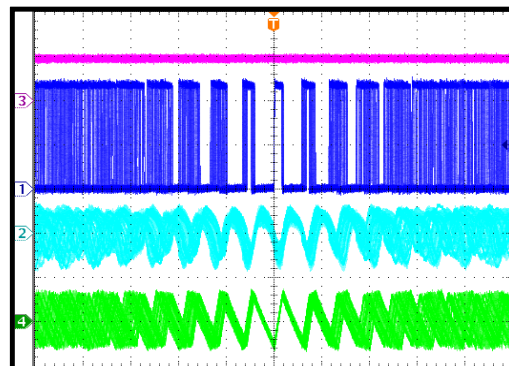CH4: I_L
1A/div.


4μs/div.


Steady State

 $I_{OUT} = 6A$

CH3: V_{PG}
5V/div.

CH1: V_{SW}
5V/div.

CH2: V_{OUT}/AC
10mV/div.

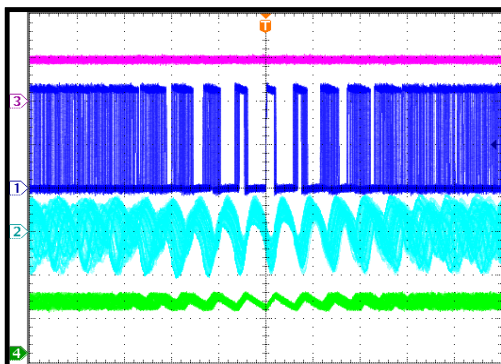CH4: I_L
5A/div.


4μs/div.


Start-Up through VIN

 $I_{OUT} = 0A$, AAM

CH3: V_{IN}
5V/div.

CH2: V_{OUT}
1V/div.

CH4: I_L
1A/div.

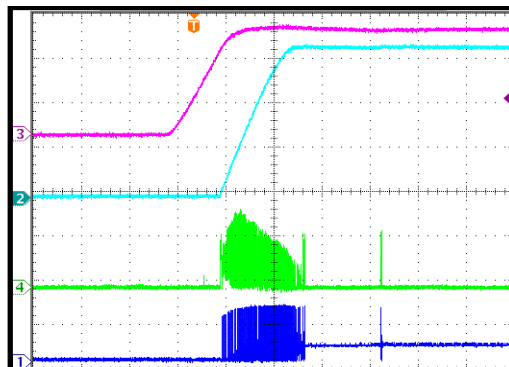CH1: V_{SW}
10V/div.


1ms/div.


Start-Up through VIN

 $I_{OUT} = 0A$, FCCM

CH3: V_{IN}
5V/div.

CH2: V_{OUT}
1V/div.

CH4: I_L
2A/div.

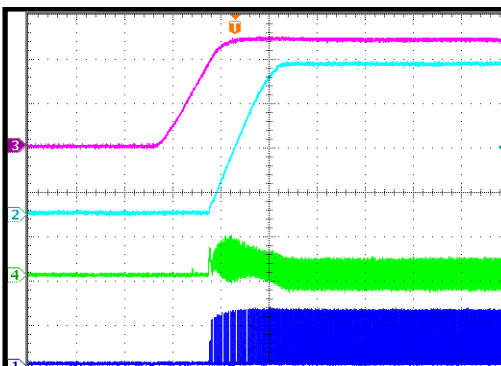CH1: V_{SW}
10V/div.


1ms/div.


Start-Up through VIN

 $I_{OUT} = 6A$

CH3: V_{IN}
5V/div.

CH2: V_{OUT}
1V/div.

CH4: I_L
5A/div.

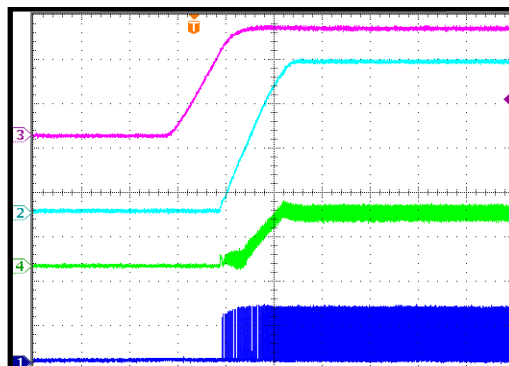
CH1: V_{SW}
10V/div.


1ms/div.


EVB TEST RESULTS (continued)

Performance curves and waveforms are tested on the evaluation board. $V_{IN} = 12V$, $V_{OUT} = 3.3V$, $L = 4.7\mu H$, $f_{SW} = 470kHz$, AAM, $T_A = 25^\circ C$, unless otherwise noted.


Shutdown through VIN

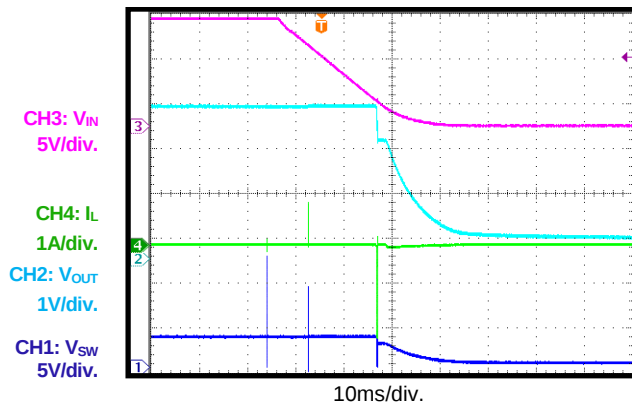 $I_{OUT} = 0A$, AAM


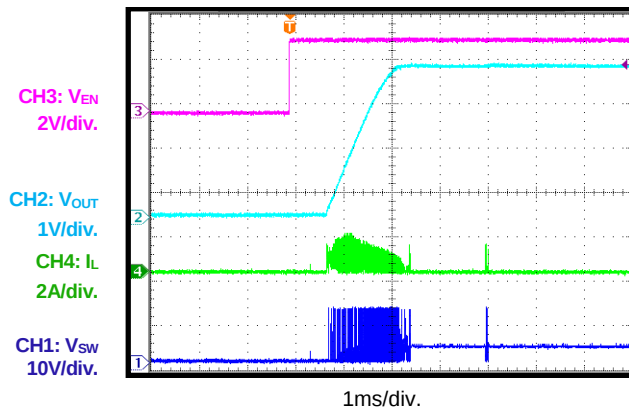
Shutdown through VIN

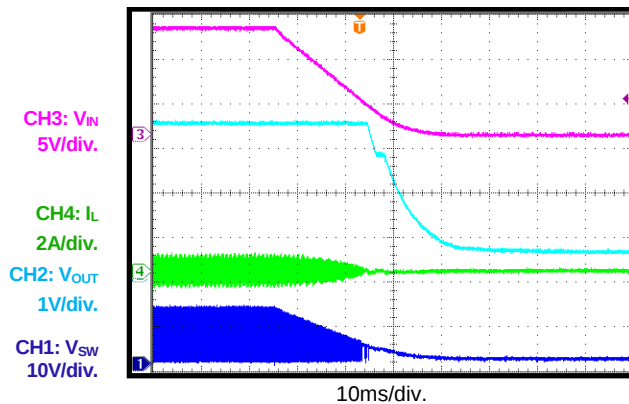 $I_{OUT} = 0A$, FCCM


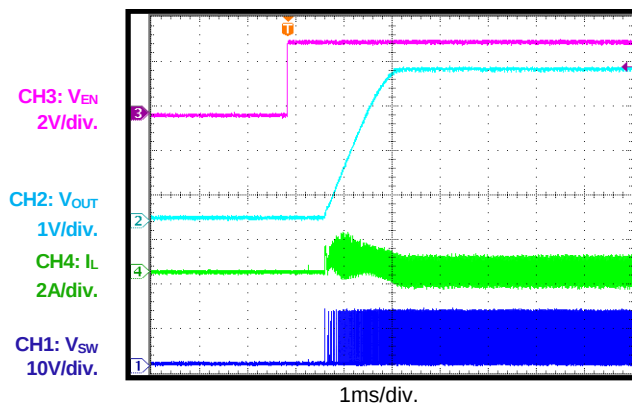
Shutdown through VIN

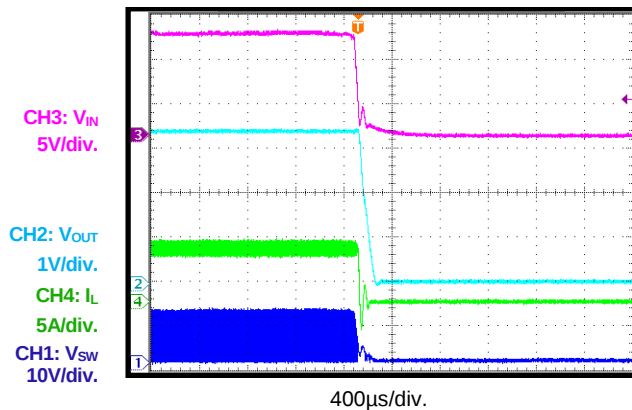 $I_{OUT} = 6A$


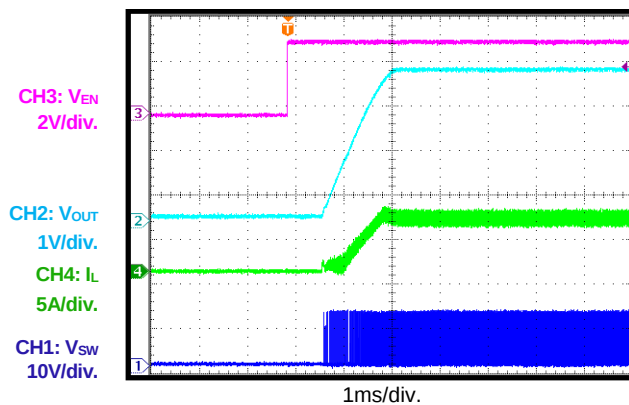
Start-Up through EN

 $I_{OUT} = 0A$, AAM


Start-Up through EN

 $I_{OUT} = 0A$, FCCM


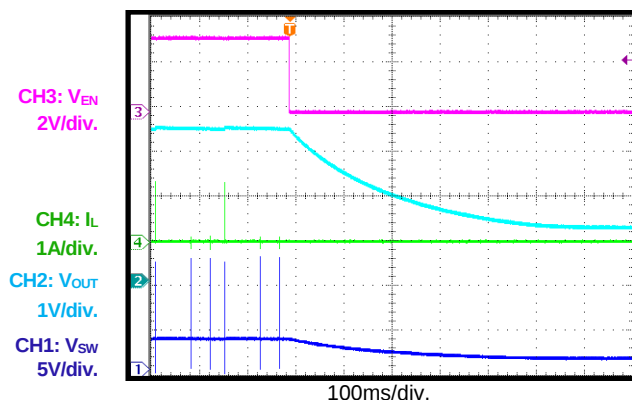
Start-Up through EN

 $I_{OUT} = 6A$


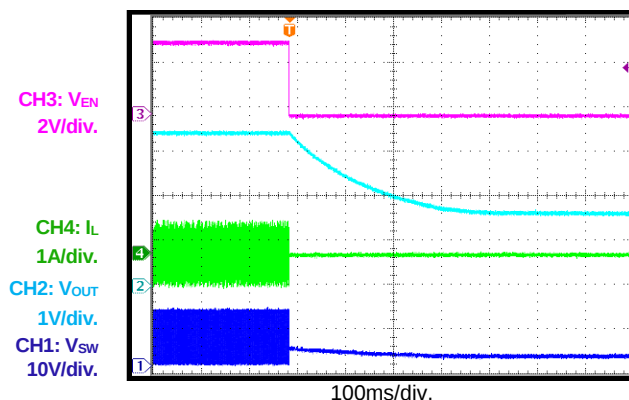
EVB TEST RESULTS (continued)

Performance curves and waveforms are tested on the evaluation board. $V_{IN} = 12V$, $V_{OUT} = 3.3V$, $L = 4.7\mu H$, $f_{SW} = 470kHz$, AAM, $T_A = 25^\circ C$, unless otherwise noted.


Shutdown through EN

 $I_{OUT} = 0A$, AAM


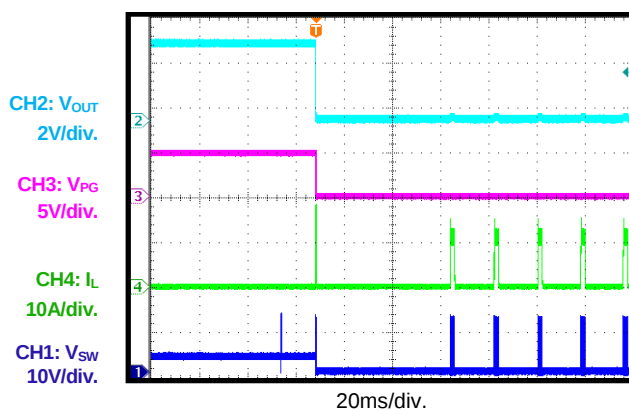
Shutdown through EN

 $I_{OUT} = 0A$, FCCM


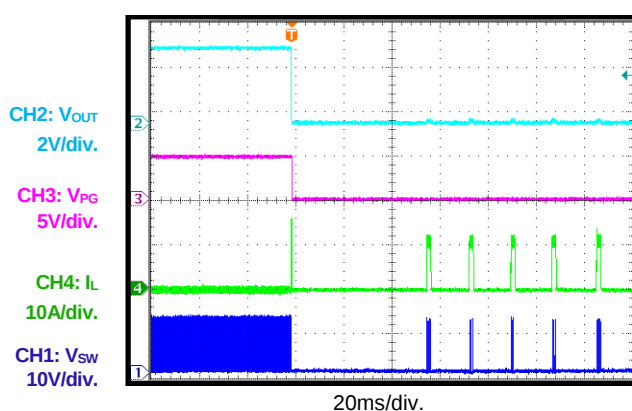
Shutdown through EN

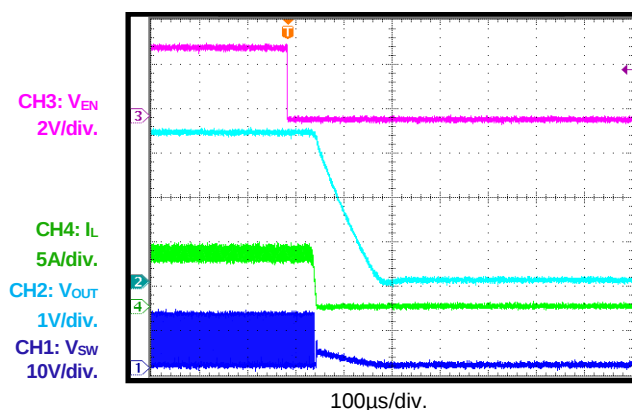 $I_{OUT} = 6A$


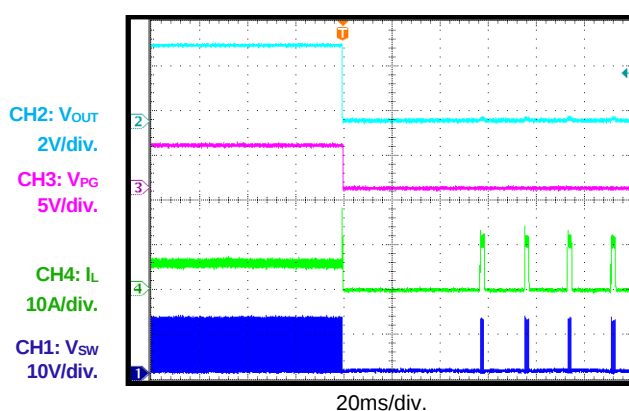
SCP Entry

 $I_{OUT} = 0A$, AAM


SCP Entry

 $I_{OUT} = 0A$, FCCM


SCP Entry


 $I_{OUT} = 6A$


EVB TEST RESULTS *(continued)*

Performance curves and waveforms are tested on the evaluation board. $V_{IN} = 12V$, $V_{OUT} = 3.3V$, $L = 4.7\mu H$, $f_{SW} = 470kHz$, AAM, $T_A = 25^\circ C$, unless otherwise noted.


SCP Recovery

$I_{OUT} = 0A$, AAM

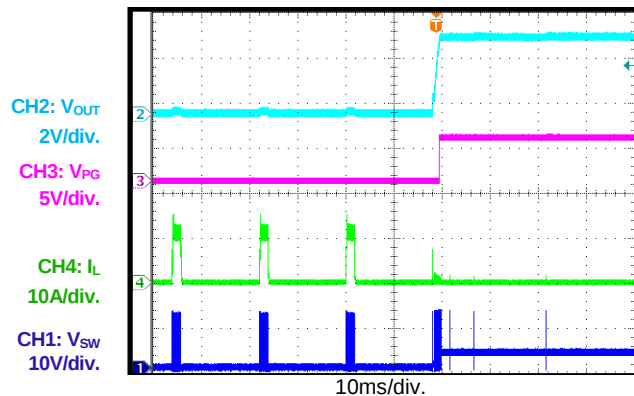


SCP Recovery

$I_{OUT} = 0A$, FCCM

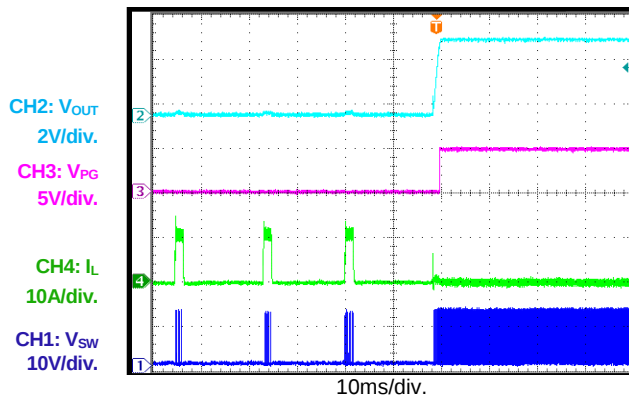


SCP Recovery

$I_{OUT} = 6A$

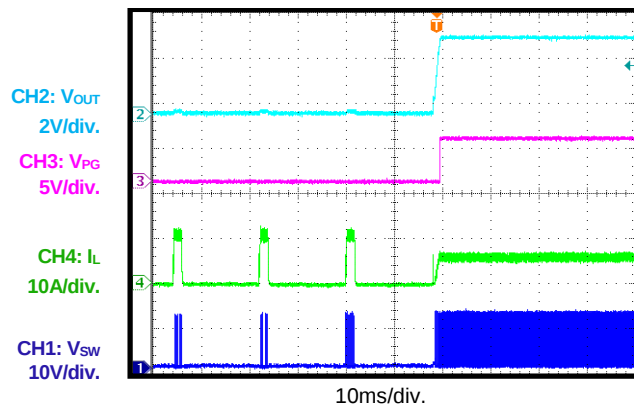


SCP Steady State

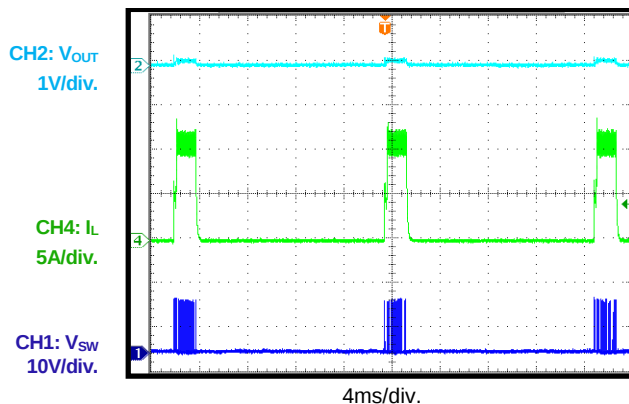


Load Transient

$I_{OUT} = 3A$ to $6A$

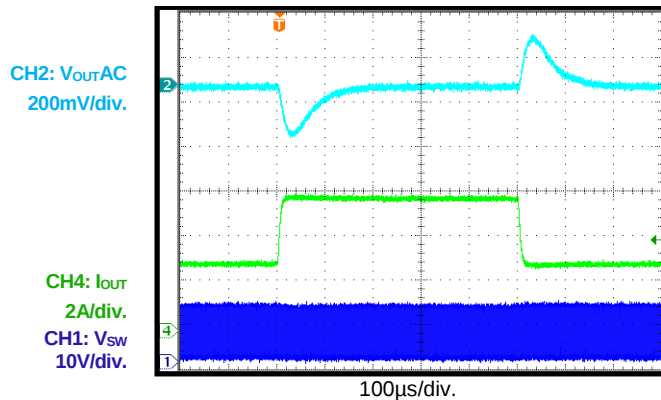

SYNC Operation

$I_{OUT} = 6A$, SYNC frequency = 350kHz

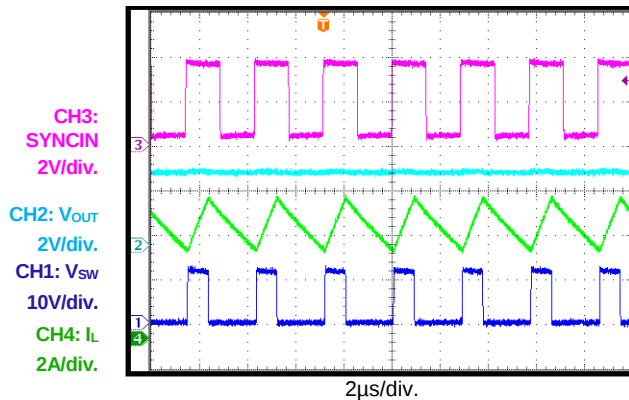


EVB TEST RESULTS (continued)

Performance curves and waveforms are tested on the evaluation board. $V_{IN} = 12V$, $V_{OUT} = 3.3V$, $L = 4.7\mu H$, $f_{SW} = 470kHz$, AAM, $T_A = 25^\circ C$, unless otherwise noted.


SYNC Operation

$I_{OUT} = 6A$, SYNC frequency = 530kHz

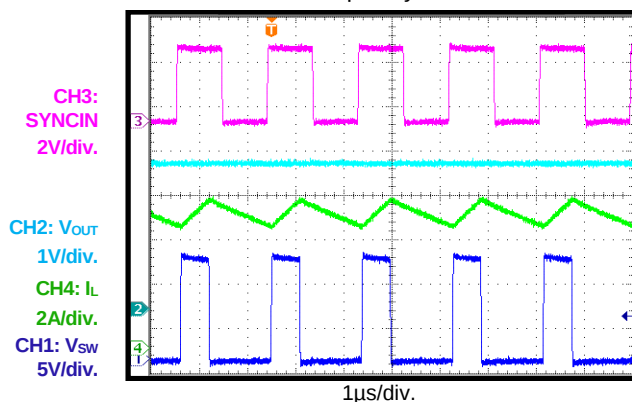


SYNC Operation

$I_{OUT} = 6A$, SYNC frequency = 350kHz

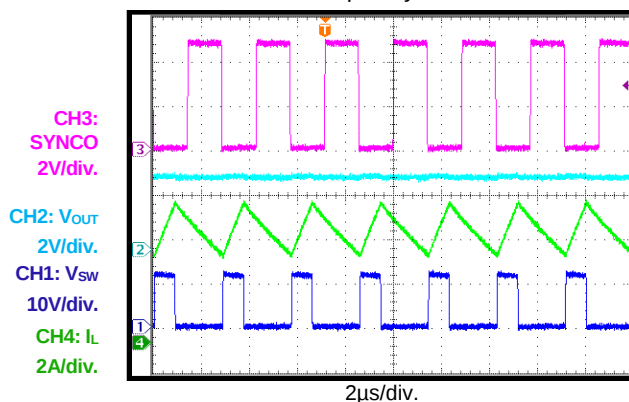


SYNC Operation

$I_{OUT} = 6A$, SYNC frequency = 530kHz

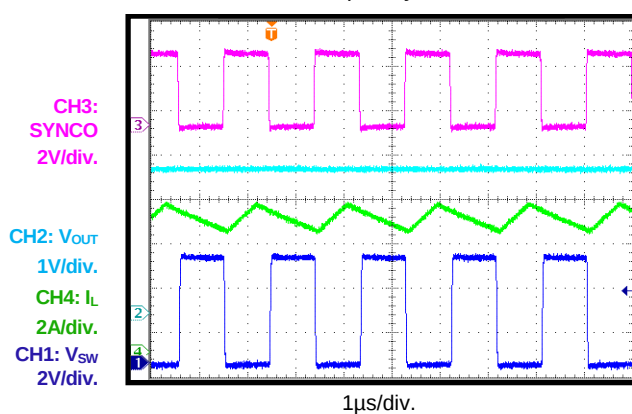


PG Start-Up through VIN

$I_{OUT} = 0A$

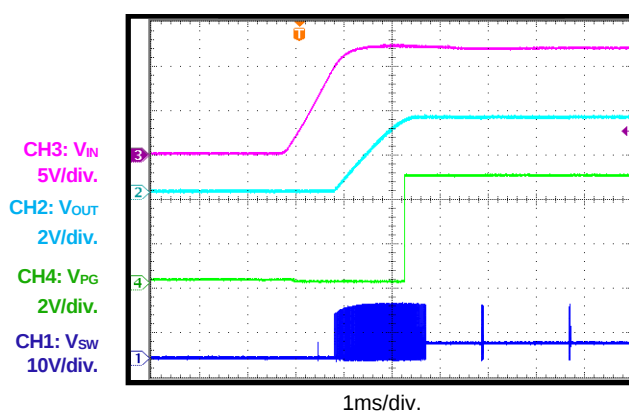


PG Start-Up through VIN

$I_{OUT} = 6A$

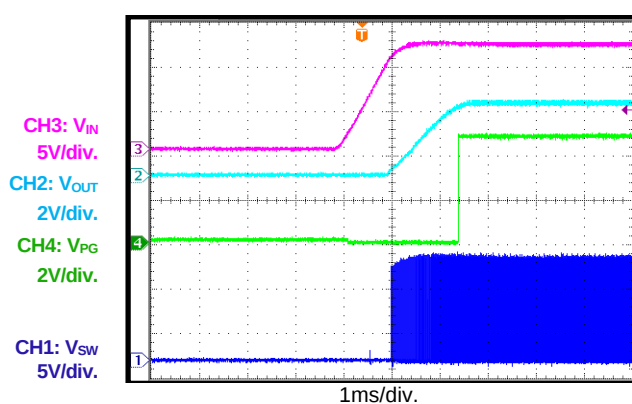

PG Shutdown through VIN


$I_{OUT} = 0A$

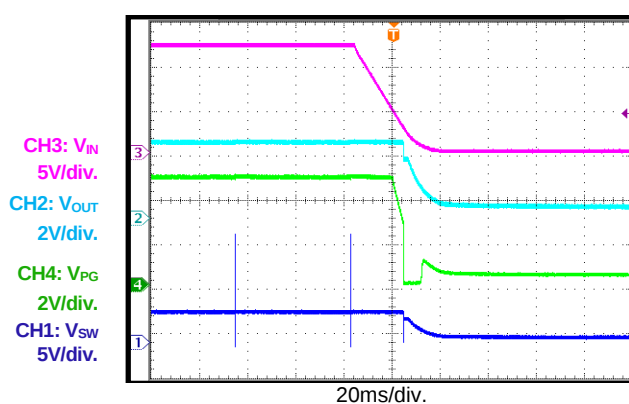


EVB TEST RESULTS (continued)

Performance curves and waveforms are tested on the evaluation board. $V_{IN} = 12V$, $V_{OUT} = 3.3V$, $L = 4.7\mu H$, $f_{SW} = 470kHz$, AAM, $T_A = 25^\circ C$, unless otherwise noted.


PG Shutdown through VIN

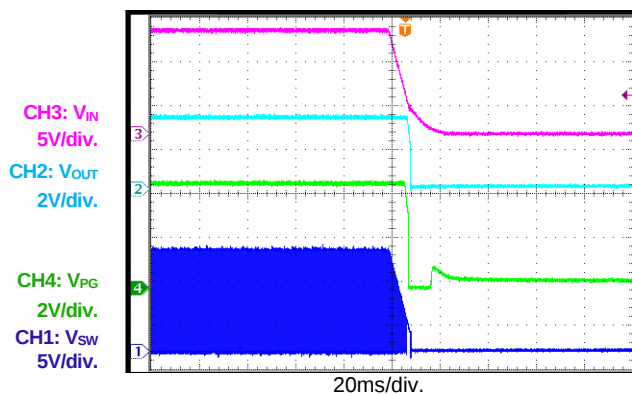 $I_{OUT} = 6A$


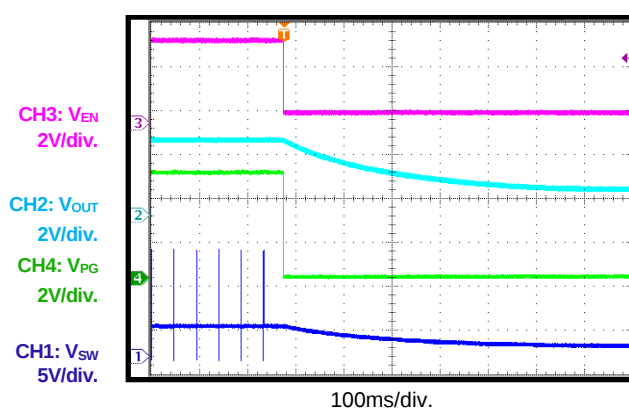
PG Start-Up through EN

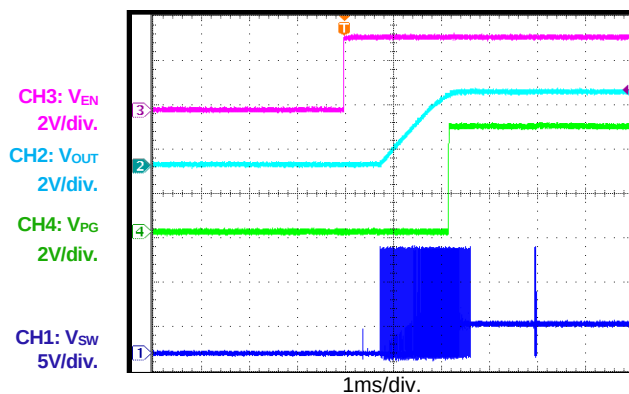 $I_{OUT} = 0A$


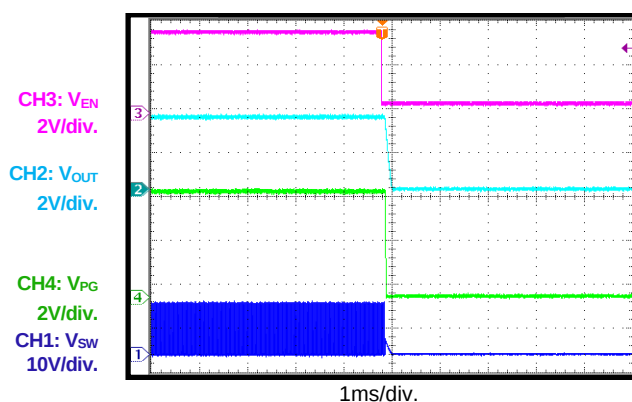
PG Start-Up through EN

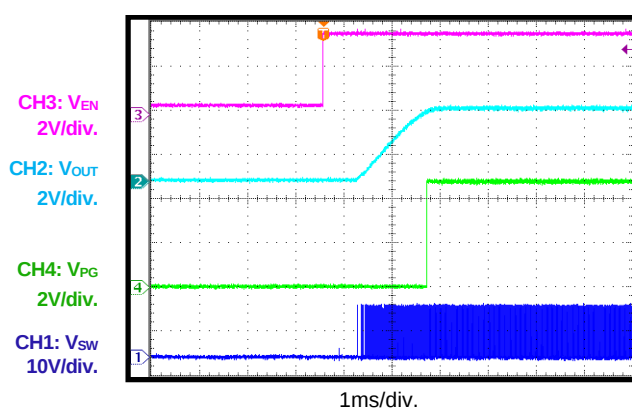 $I_{OUT} = 6A$


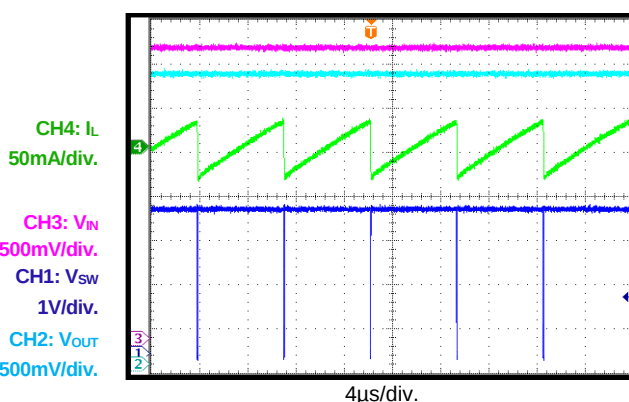
PG Shutdown through EN

 $I_{OUT} = 0A$


PG Shutdown through EN

 $I_{OUT} = 6A$


Low-Dropout Mode


 $V_{IN} = 3.3V$, V_{OUT} set to 3.3V, $I_{OUT} = 0A$


EVB TEST RESULTS *(continued)*

Performance curves and waveforms are tested on the evaluation board. $V_{IN} = 12V$, $V_{OUT} = 3.3V$, $L = 4.7\mu H$, $f_{SW} = 470kHz$, AAM, $T_A = 25^\circ C$, unless otherwise noted.


Low-Dropout Mode

$V_{IN} = 3.3V$, V_{OUT} set to 3.3V, $I_{OUT} = 6A$

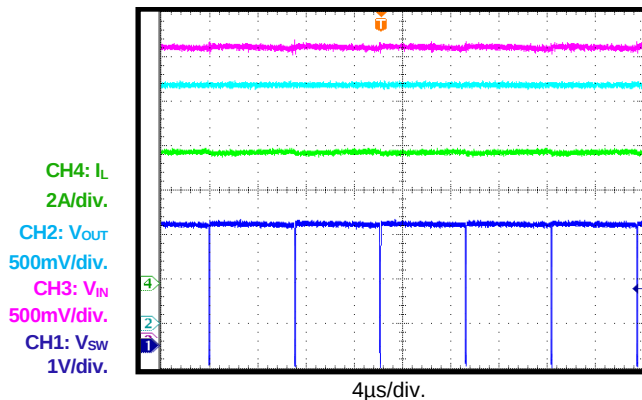


Load Dump

$V_{IN} = 12V$ to 36V, $I_{OUT} = 6A$

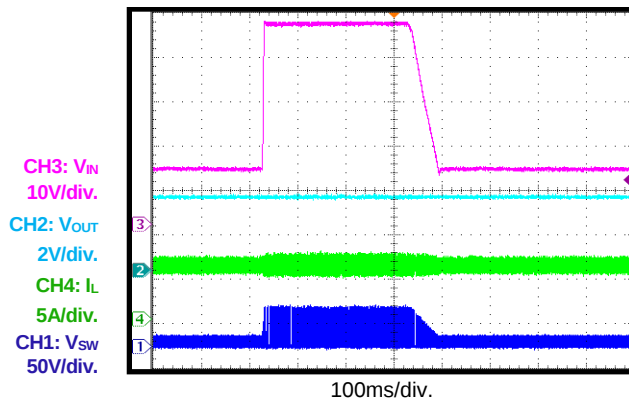


Cold Crank

$V_{IN} = 12V$ to 3.3V to 5V, $I_{OUT} = 6A$

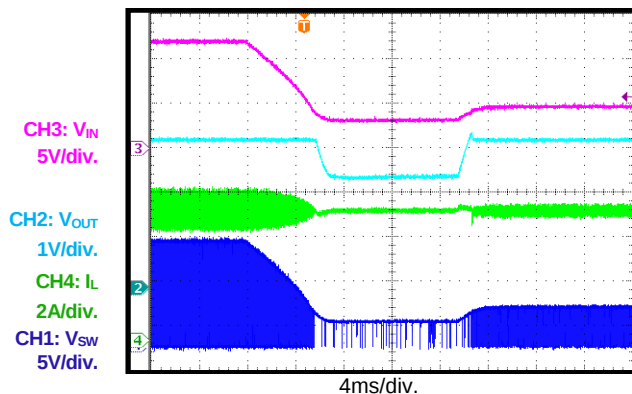


V_{IN} Ramp Up and Down

$I_{OUT} = 0.1A$

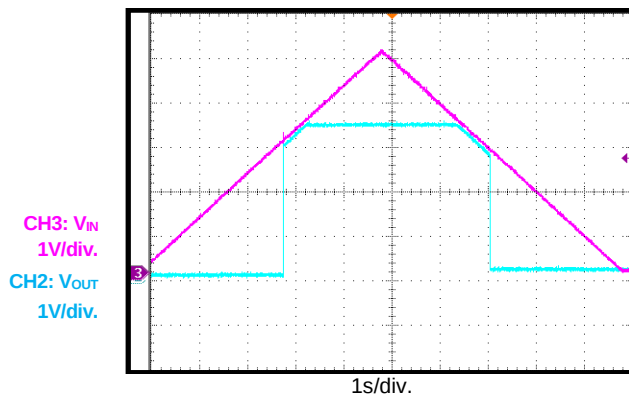


V_{IN} Ramp Down and Up

$I_{OUT} = 1mA$

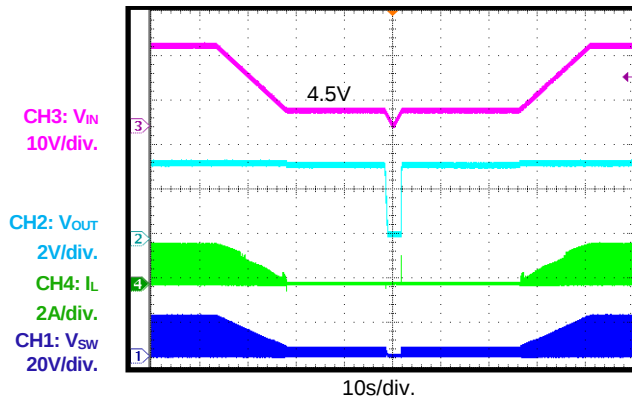

V_{IN} Ramp Down and Up

$I_{OUT} = 6A$

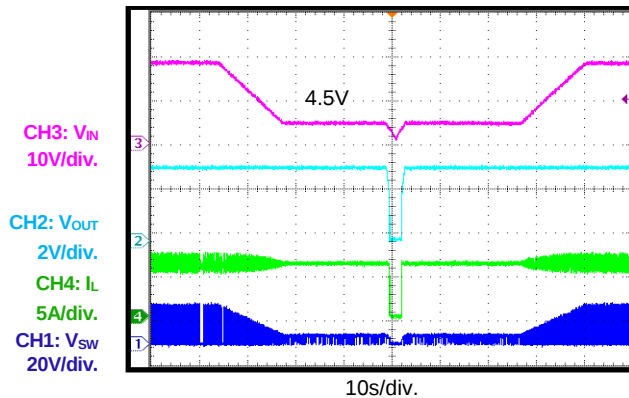

PCB LAYOUT

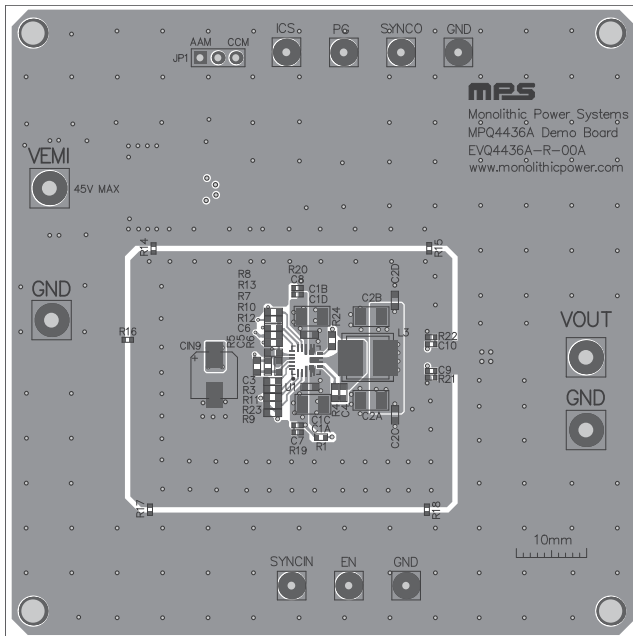


Figure 2: Top Silk Layer and Top Layer

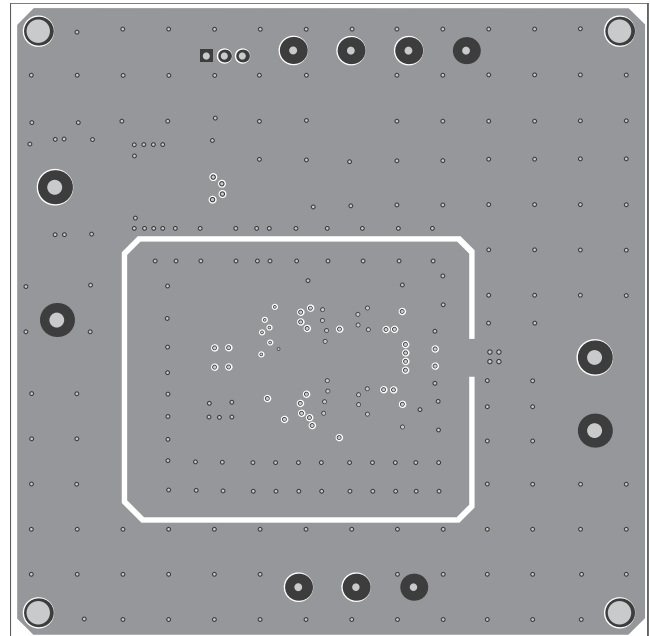


Figure 3: Mid-Layer 1

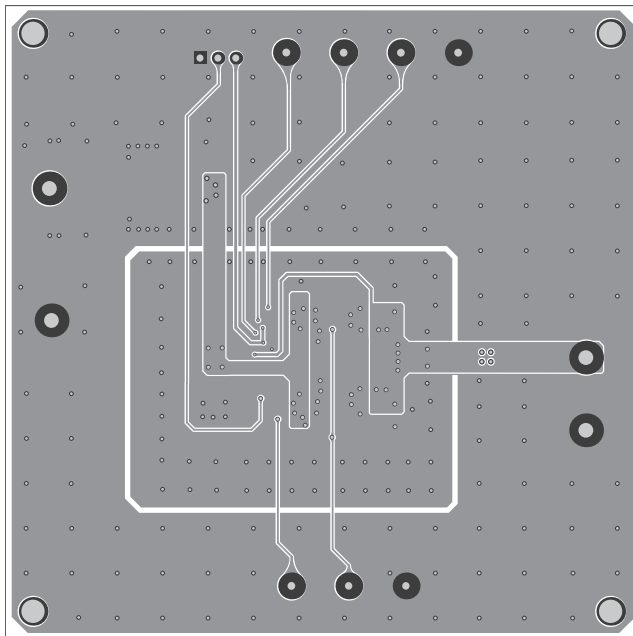


Figure 4: Mid-Layer 2

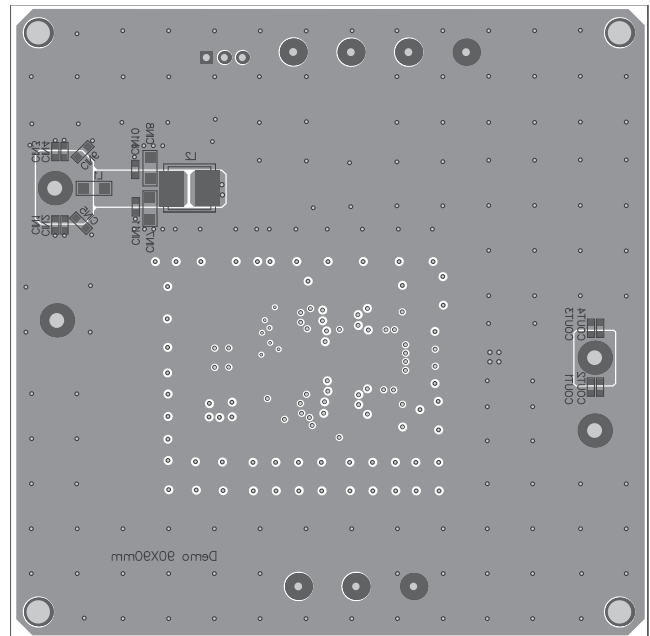


Figure 5: Bottom Silk Layer and Bottom Layer

REVISION HISTORY

Revision #	Revision Date	Description	Pages Updated
1.0	12/21/2020	Initial Release	-

Notice: The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third-party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.