



Series: Internal Antenna

PART NUMBER: W3917Bxxx



Features:

- 2400-2500 / 4900-7125 MHz
- Size 42.6 X 8.6 X 0.15 mm
- Efficiency 60/70%
- VSWR < 2
- Nominal impedance 50 Ω
- Cable and connector can be customized

Applications:




- WiFi 6E, 802.11ax
- Bluetooth, BLE, ZigBee
- DSRC
- · ISM band radios
- IoT, M2M

All dimensions are in mm / inches

Issue: 2020

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



Pulse Worldwide Headquarters 12220 World Trade Drive San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998





Series: Internal Antenna

PART NUMBER: W3917Bxxx

ELECTRICAL SPECIFICATIONS

Antenna Type Dipole

Frequency 2400-2500MHz

4900-7125MHz

Nominal Impedance 50 Ω

Return Loss 2400-2500MHz<-6db

4900-7125MHz<-10db

Radiation Pattern Omni

Gain 2+/-1dBi@2400-2500MHz

3+/-1dBi@4900-7125MHz

Efficiency 40%@2400-2500MHz

50%@4900-7125MHz

Polarization Linear

Power Withstanding 5W







Series: Internal Antenna

PART NUMBER: W3917Bxxx

MECHANICAL SPECIFICATIONS

Radiator material FPC

Color Black

Adhesive 3M467

Thickness(with adhesive, no liner) 0.15 mm

Weight 0.32 g

FPC size(L X W X T) 42.6 X 8.6 X 0.15 mm

ENVIRONMENTAL SPECIFICATIONS

Operating temperature -40/+85 ° C







Series: Internal Antenna

PART NUMBER: W3917Bxxx

This document covers all product variants of the following product family:

W3917B0050 50mm 1.13mm OD cable U.FL compatible connector

W3917B0100 100mm 1.13mm OD cable U.FL compatible connector







Series: Internal Antenna

PART NUMBER: W3917Bxxx

MECHANICAL DRAWING

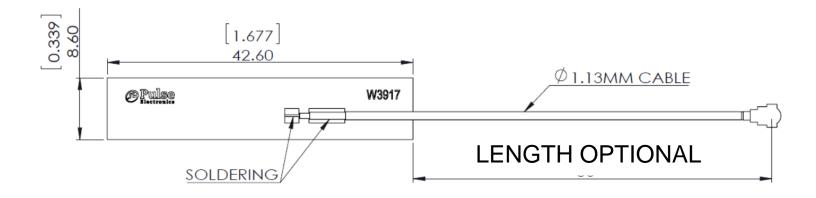

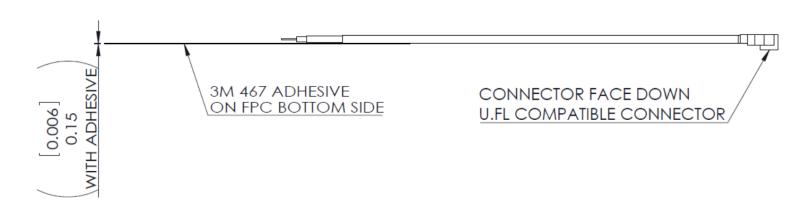





Series: Internal Antenna

PART NUMBER: W3917Bxxx

CHARTS

(*) All RF parameters measured on 2mm thick PC plate Test Setup










Series: Internal Antenna

PART NUMBER: W3917Bxxx

CHARTS

(*) All RF parameters measured on 2mm thick PC plate Return Loss

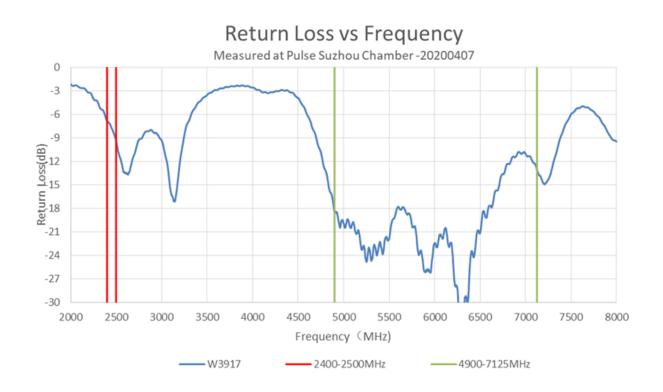








Series: Internal Antenna

PART NUMBER: W3917Bxxx

CHARTS

(*) All RF parameters measured on 2mm thick PC plate

Efficiency

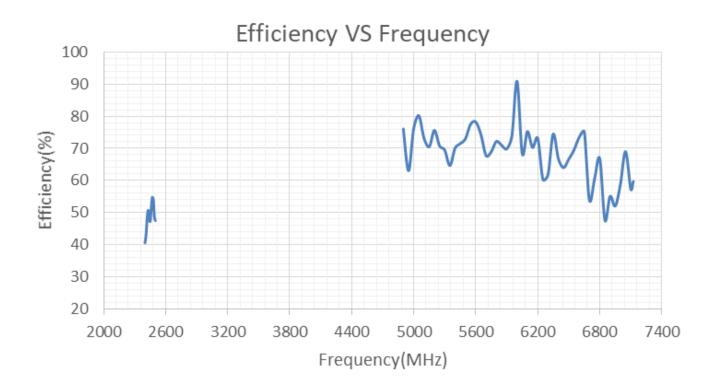








Series: Internal Antenna

PART NUMBER: W3917Bxxx

CHARTS

(*) All RF parameters measured on 2mm thick PC plate

Peak Gain

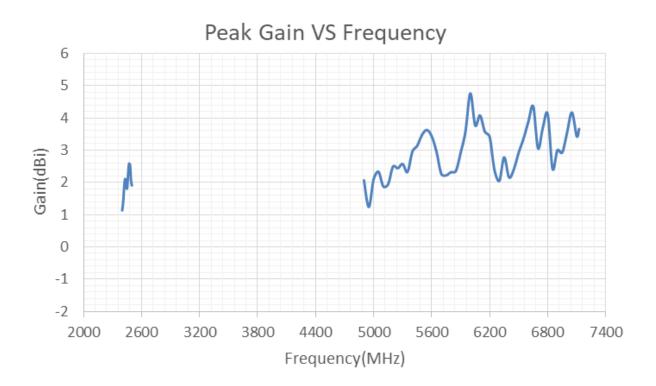







Series: Internal Antenna


PART NUMBER: W3917Bxxx


CHARTS

Radiation Patterns 2400-2500MHz

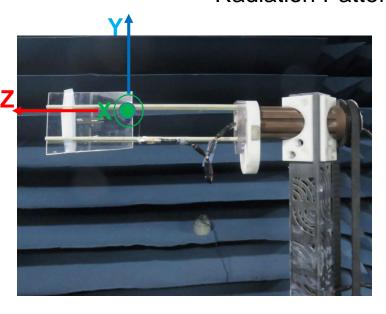

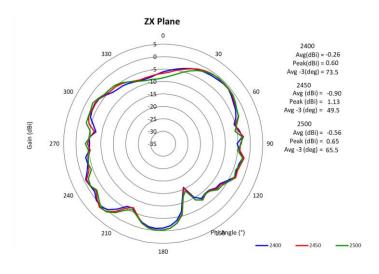

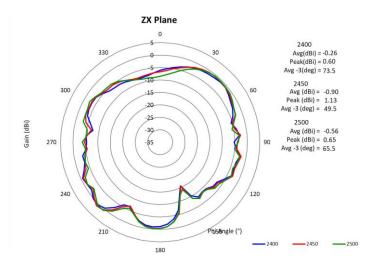

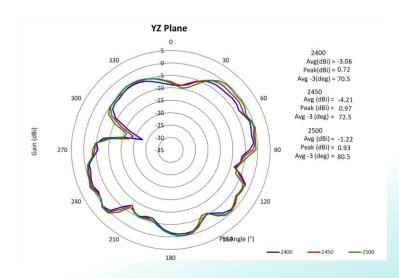

Issue: 2020

ROHS







Series: Internal Antenna


PART NUMBER: W3917Bxxx


CHARTS

Radiation Patterns 4900-5900MHz

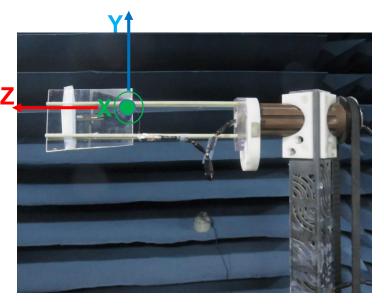

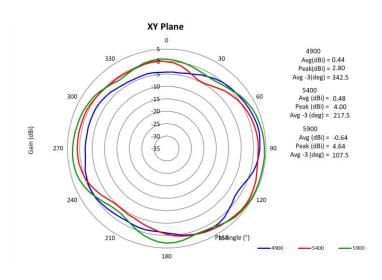

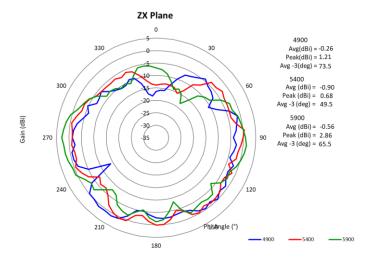

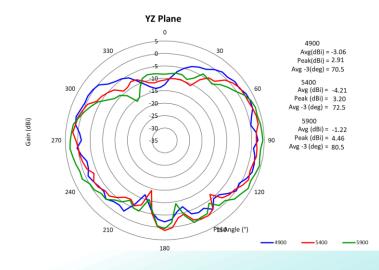

Issue: 2020





Series: Internal Antenna


PART NUMBER: W3917Bxxx


CHARTS

Radiation Patterns 6000-7125MHz

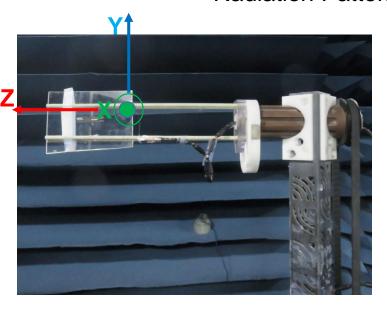

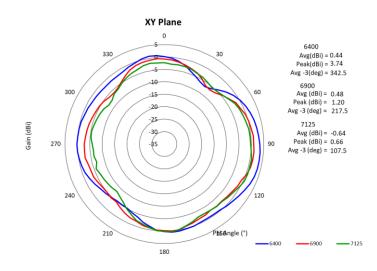

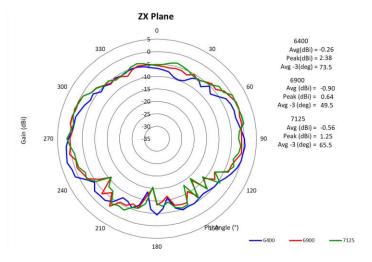

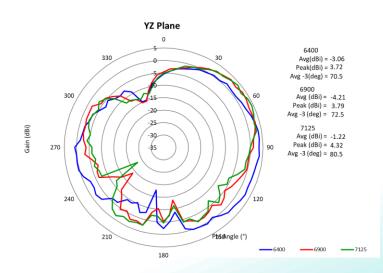

Issue: 2020





Series: Internal Antenna

PART NUMBER: W3917Bxxx

PACKAGING

10PCS/PE bag 10 PE bag/foam bag 50 foam bag/ carton box

Total 5000PCS/Carton box



