

DUAL OPERATIONAL AMPLIFIER

DESCRIPTION


The LM358 consists of two independent high gain, internally frequency compensated operational amplifier. It can be operated from a single power supply and also split power supplies.

FEATURES


- *Internally frequency compensated for unity gain.
- *Wide power supply range 3V - 32V.
- *Input common-mode voltage range include ground.
- *Large DC voltage gain.

APPLICATIONS


- *General purpose amplifier.
- *Transducer amplifier.

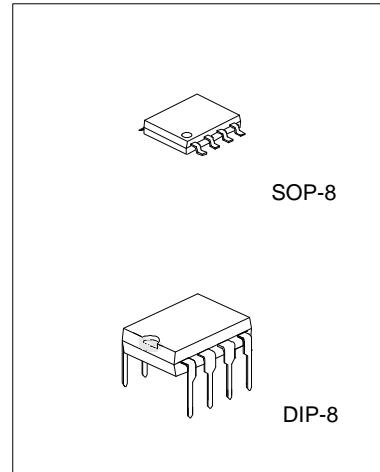

PIN CONFIGURATIONS

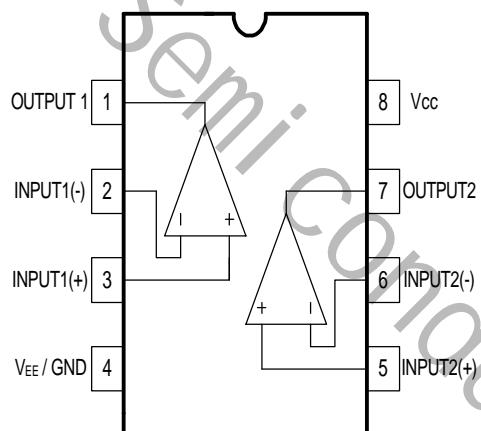

BLOCK DIAGRAM

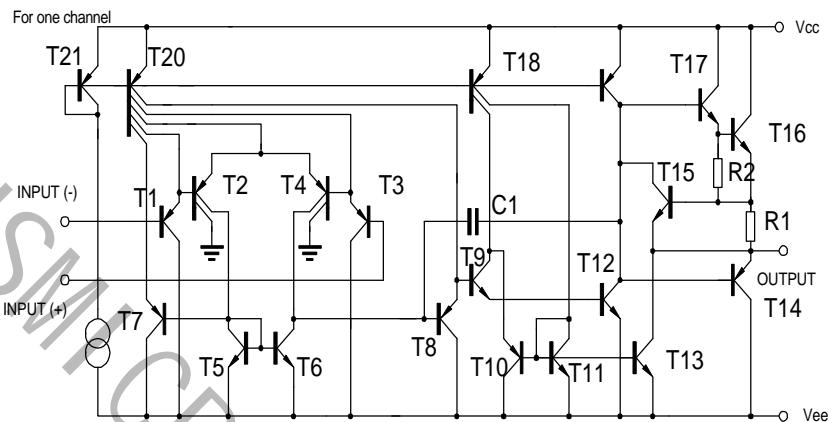

ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	VALUE	UNIT
Supply Voltage	V _{CC}	+16 or 32	V
Differential Input Voltage	V _{I(DIFF)}	32	V
Input Voltage	V _I	-0.3 ~ +32	V
Output Short to Ground		Continuous	
Operating Temperature Range	T _{OPR}	0 ~ +70	°C
Storage Temperature Range	T _{STG}	-65 ~ +150	°C

ELECTRICAL CHARACTERISTICS ($V_{CC}=5.0V, V_{EE}=GND, TA=25^{\circ}C$, unless otherwise specified) ©

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Input Offset Voltage	V_{IO}	$V_{CM}=0V$ to $V_{CC}-1.5V$ $V_{O(P)}=1.4V, R_S=0\Omega$		2.9	7.0	mV
Input Offset Current	I_{IO}			5	50	nA
Input Bias Current	I_{IBIAS}			45	250	nA
Input Common Mode Voltage	$V_{I(R)}$	$V_{CC}=30V$	0		$V_{CC}-1.5$	V
Power Supply Current	I_{CC}	$R_L=\infty, V_{CC}=30V$		0.8	2.0	mA
		$R_L=\infty$, Full Temperature Range		0.5	1.2	mA
Large Signal Voltage Gain	G_V	$V_{CC}=15V, R_L \geq 2K\Omega$ $V_{O(P)}=1V$ to $11V$	25	100		V/mV
Output Voltage Swing	$V_{O(H)}$	$V_{CC}=30V, R_L=2K\Omega$	26			V
		$V_{CC}=30V, R_L=10K\Omega$	27	28		V
	$V_{O(L)}$	$V_{CC}=5V, R_L \geq 10K\Omega$		5	20	mV
Common Mode Rejection Ratio	$CMRR$		65	80		dB
Power Supply Rejection Ratio	$PSRR$		65	100		dB
Channel Separation	CS	$f=1KHZ$ to $20KHZ$		120		dB
Short Circuit Current to Ground	ISC			40	60	mA
Output Current	I_{SOURCE}	$V_{I(+)}=1V, V_{I(-)}=0V$ $V_{CC}=15V, V_{O(P)}=2V$	20	30		mA
	I_{SINK}	$V_{I(+)}=0V, V_{I(-)}=1V$ $V_{CC}=15V, V_{O(P)}=2V$	10	15		mA
		$V_{I(+)}=0V, V_{I(-)}=1V$ $V_{CC}=15V, V_{O(P)}=200mV$	12	100		mA
Differential Input Voltage	$V_{I(DIFF)}$				V_{CC}	V

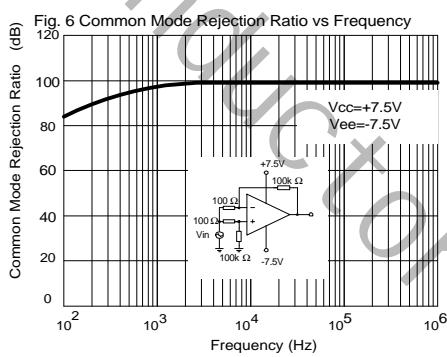
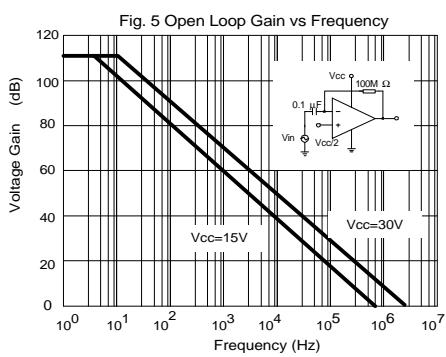
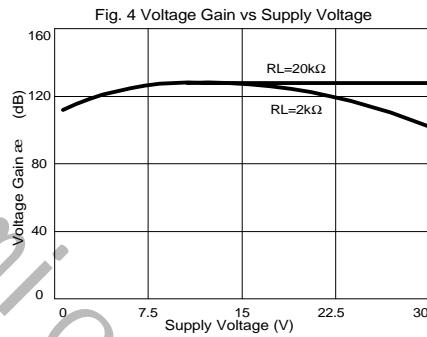
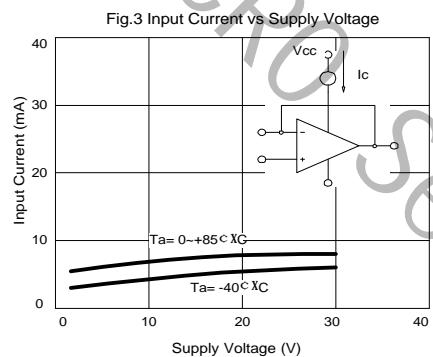
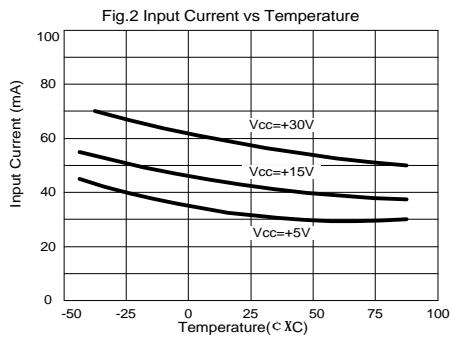
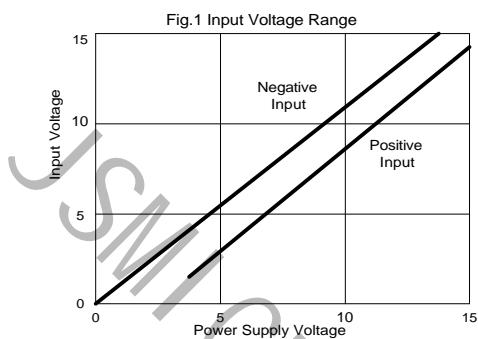
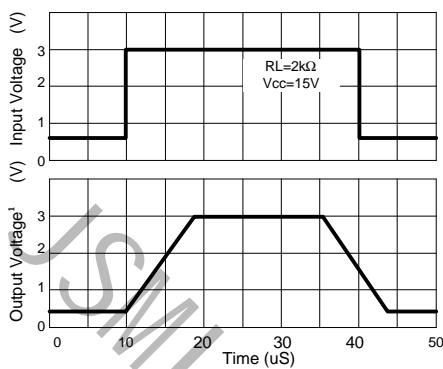
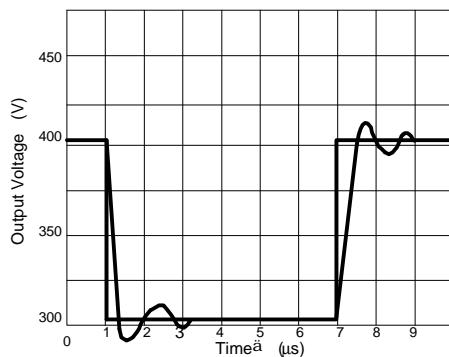
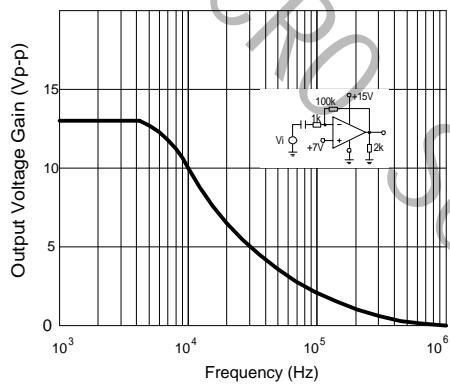
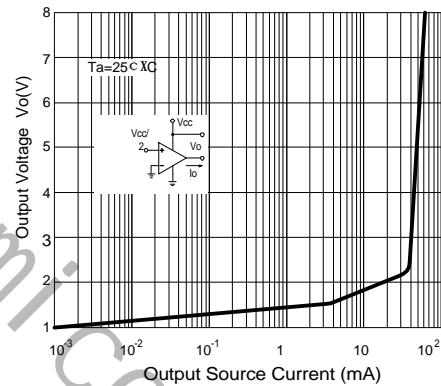
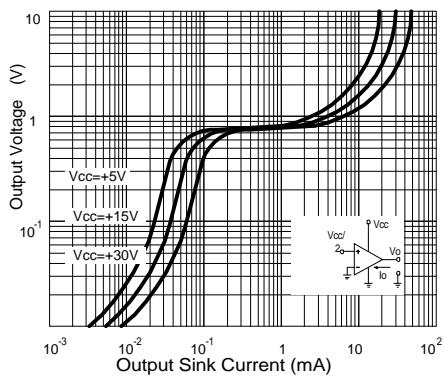
TYPICAL PERFORMANCE CHARACTERISTICS


Fig. 7 Voltage Follower Pulse Response

Fig. 8 Voltage Follower Response (Small Signal)

Fig. 9 Gain vs Large Signal Frequency

Fig. 10 Output Current Sinking vs Output Voltage

Fig. 11 Output Sink Current vs Output Voltage

Fig. 12 Current Limiting vs Temperature
