## SIEMENS

## Data sheet


## 3RA2210-1EH15-2BB4



Load feeder fuseless, Reversing duty 400 V AC, Size S00 2.80...4.00 A 24 V DC Spring-type terminal for 60 mm busbar systems (also fulfills type of coordination 1) Type of coordination 2, Iq = 150 kA 1 NC (contactor)

product brand name	SIRIUS
product designation	Reversing starter
design of the product	for 60 mm busbars
product type designation	3RA22
manufacturer's article number	
<ul> <li>of the supplied contactor</li> </ul>	3RT2015-2BB42
<ul> <li>of the supplied circuit-breakers</li> </ul>	3RV2011-1EA20
<ul> <li>of the supplied RS assembly kit</li> </ul>	8US1250-5AT10
<ul> <li>of the supplied busbar adapter</li> </ul>	8US1251-5DT11
of the supplied link module	3RA2911-2AA00
General technical data	
size of the circuit-breaker	S00
size of load feeder	S00
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
shock resistance acc. to IEC 60068-2-27	6g / 11 ms
mechanical service life (switching cycles) of contactor typical	30 000 000
type of assignment	2
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD
certificate of suitability according to ATEX directive 2014/34/EU	DMT 02 ATEX F 001
Substance Prohibitance (Date)	01.10.2009 00:00:00
Ambient conditions	
<ul> <li>ambient temperature during operation</li> </ul>	-20 +60 °C
ambient temperature during storage	-50 +80 °C
ambient temperature during transport	-50 +80 °C
temperature compensation	-20 +60 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
design of the switching contact	electromechanical
adjustable current response value current of the current-dependent overload release	2.8 4 A
<ul> <li>operating voltage rated value</li> </ul>	
<ul> <li>operating voltage at AC-3 rated value maximum</li> </ul>	690 V

operating frequency rated value	50 60 Hz	
operational current at AC-3 at 400 V rated value	3.6 A	
operating power at AC-3	3.0 A	
at 400 V rated value	1 500 W	
Control circuit/ Control	1 300 11	
	DC	
type of voltage of the control supply voltage	DC	
control supply voltage at DC <ul> <li>rated value</li> </ul>	24 V	
holding power of magnet coil at DC	24 V 4 W	
	4 VV	
Auxiliary circuit	No.	
product extension auxiliary switch	Yes	
Protective and monitoring functions		
trip class	CLASS 10	
design of the overload release	thermal (bimetallic)	
UL/CSA ratings		
full-load current (FLA) for 3-phase AC motor		
at 480 V rated value	4 A	
yielded mechanical performance [hp]		
for 3-phase AC motor		
— at 200/208 V rated value	0.75 hp	
— at 220/230 V rated value	1 hp	
— at 460/480 V rated value	2 hp	
— at 575/600 V rated value	3 hp	
Short-circuit protection		
product function short circuit protection	Yes	
design of the short-circuit trip	magnetic	
conditional short-circuit current (Iq)		
• at 400 V acc. to IEC 60947-4-1 rated value	150 000 A	
Installation/ mounting/ dimensions		
mounting position	vertical	
mounting position fastening method	for snapping onto 60 mm busba	ar systems
mounting position fastening method height	for snapping onto 60 mm busba 260 mm	ar systems
mounting position fastening method height width	for snapping onto 60 mm busba 260 mm 90 mm	ar systems
mounting position fastening method height width depth	for snapping onto 60 mm busba 260 mm	ar systems
mounting position fastening method height width depth required spacing	for snapping onto 60 mm busba 260 mm 90 mm	ar systems
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts	for snapping onto 60 mm busba 260 mm 90 mm 155 mm	ar systems
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards	for snapping onto 60 mm busba 260 mm 90 mm 155 mm 32 mm	ar systems
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards	for snapping onto 60 mm busba 260 mm 90 mm 155 mm 32 mm 0 mm	ar systems
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards	for snapping onto 60 mm busba 260 mm 90 mm 155 mm 32 mm 0 mm 50 mm	ar systems
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side	for snapping onto 60 mm busba 260 mm 90 mm 155 mm 32 mm 0 mm 50 mm 10 mm	ar systems
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards	for snapping onto 60 mm busba 260 mm 90 mm 155 mm 32 mm 0 mm 50 mm	ar systems
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts	for snapping onto 60 mm busba 260 mm 90 mm 155 mm 32 mm 0 mm 50 mm 10 mm 10 mm	ar systems
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards	for snapping onto 60 mm busba 260 mm 90 mm 155 mm 32 mm 0 mm 50 mm 10 mm 10 mm 32 mm	ar systems
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — backwards	for snapping onto 60 mm busba 260 mm 90 mm 155 mm 32 mm 0 mm 50 mm 10 mm 10 mm 32 mm 0 mm	ar systems
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — upwards         — upwards         — obackwards         — upwards         • for live parts         — upwards         — upwards	for snapping onto 60 mm busba 260 mm 90 mm 155 mm 32 mm 0 mm 50 mm 10 mm 10 mm 32 mm 0 mm 50 mm	ar systems
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — downwards         — backwards         — downwards         — backwards         — downwards         — downwards         — downwards         — downwards         — upwards         — downwards	for snapping onto 60 mm busba 260 mm 90 mm 155 mm 32 mm 0 mm 50 mm 10 mm 32 mm 0 mm 50 mm 10 mm 50 mm 10 mm	ar systems
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — downwards         • for live parts         — forwards         — at the side         — downwards         — at the side         — upwards         — at the side	for snapping onto 60 mm busba 260 mm 90 mm 155 mm 32 mm 0 mm 50 mm 10 mm 10 mm 32 mm 0 mm 50 mm	ar systems
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — backwards         — at the side         — downwards         — forwards         — forwards         — at the side         — upwards         — at the side         — upwards         — at the side         — downwards         — at the side         Connections/ Terminals	for snapping onto 60 mm busba 260 mm 90 mm 155 mm 32 mm 0 mm 50 mm 10 mm 32 mm 0 mm 50 mm 10 mm 50 mm 10 mm	ar systems
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — backwards         — at the side         — downwards         — backwards         — at the side         — downwards         — at the side         — downwards         — backwards         — upwards         — backwards         — upwards         — downwards         — at the side         Zonnections/ Terminals         type of electrical connection	for snapping onto 60 mm busba 260 mm 90 mm 155 mm 32 mm 0 mm 50 mm 10 mm 32 mm 0 mm 50 mm 10 mm 10 mm 10 mm	ar systems
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — downwards         • for live parts         — forwards         — upwards         — at the side         — downwards         — backwards         — upwards         — backmards         — in upwards         — other side         Connections/ Terminals         type of electrical connection         • for main current circuit	for snapping onto 60 mm busba 260 mm 90 mm 155 mm 32 mm 0 mm 50 mm 10 mm 32 mm 0 mm 50 mm 10 mm 50 mm 10 mm	ar systems
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — downwards         • for live parts         — forwards         — upwards         — at the side         — downwards         — backwards         — upwards         — odownwards         — of orwards         — o	for snapping onto 60 mm busba 260 mm 90 mm 155 mm 32 mm 0 mm 50 mm 10 mm 32 mm 0 mm 50 mm 10 mm 10 mm 10 mm 10 mm	ar systems
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — backwards         — downwards         • for live parts         — forwards         — at the side         — downwards         — backwards         — upwards         — for reminals         type of electrical connection         • for main current circuit         Safety related data         B10 value with high demand rate acc. to SN 31920	for snapping onto 60 mm busba 260 mm 90 mm 155 mm 32 mm 0 mm 50 mm 10 mm 32 mm 0 mm 50 mm 10 mm 10 mm 10 mm	ar systems
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — backwards         — upwards         — downwards         • for live parts         — forwards         — at the side         — downwards         — at the side         Connections/ Terminals         type of electrical connection         • for main current circuit         Safety related data         B10 value with high demand rate acc. to SN 31920         proportion of dangerous failures	for snapping onto 60 mm busba 260 mm 90 mm 155 mm 32 mm 0 mm 50 mm 10 mm 32 mm 0 mm 50 mm 10 mm	ar systems
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — backwards         — upwards         — of orwards         — ownwards         — at the side         — downwards         — at the side         Connections/ Terminals         type of electrical connection         • for main current circuit         Safety related data         B10 value with high demand rate acc. to SN 31920         proportion of dangerous failures         • with high demand rate acc. to SN 31920	for snapping onto 60 mm busba 260 mm 90 mm 155 mm 32 mm 0 mm 50 mm 10 mm 10 mm 32 mm 0 mm 50 mm 10 mm	
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         - forwards         - backwards         - upwards         - at the side         - downwards         • for live parts         - forwards         - backwards         - backwards         - downwards         • for live parts         - forwards         - downwards         - at the side         Connections/ Terminals         type of electrical connection         • for main current circuit         Safety related data         B10 value with high demand rate acc. to SN 31920         proportion of dangerous failures         • with high demand rate acc. to SN 31920	for snapping onto 60 mm busba 260 mm 90 mm 155 mm 32 mm 0 mm 50 mm 10 mm 32 mm 0 mm 50 mm 10 mm	
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — backwards         — upwards         — of orwards         — ownwards         — at the side         — downwards         — at the side         Connections/ Terminals         type of electrical connection         • for main current circuit         Safety related data         B10 value with high demand rate acc. to SN 31920         proportion of dangerous failures         • with high demand rate acc. to SN 31920	for snapping onto 60 mm busba 260 mm 90 mm 155 mm 32 mm 0 mm 50 mm 10 mm 32 mm 0 mm 50 mm 10 mm	

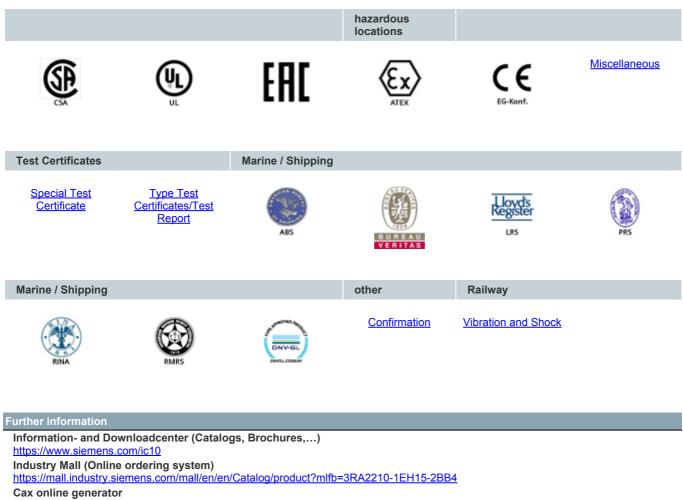

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2210-1EH15-2BB4

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RA2210-1EH15-2BB4


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RA2210-1EH15-2BB4&lang=en


Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RA2210-1EH15-2BB4/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA2210-1EH15-2BB4&objecttype=14&gridview=view1

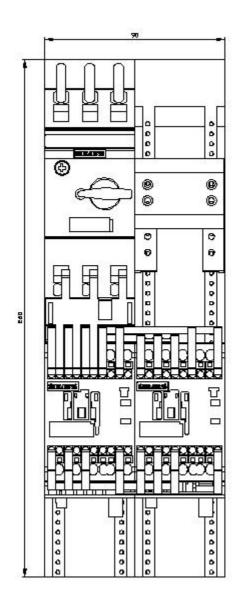

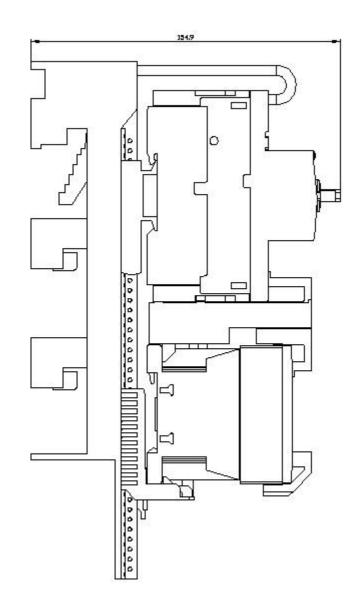

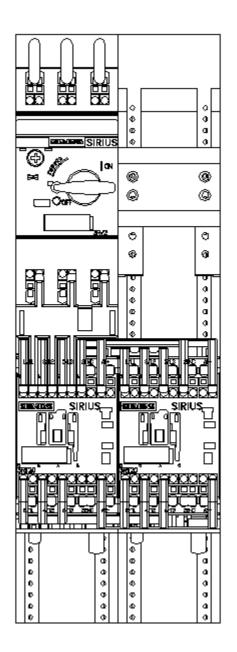

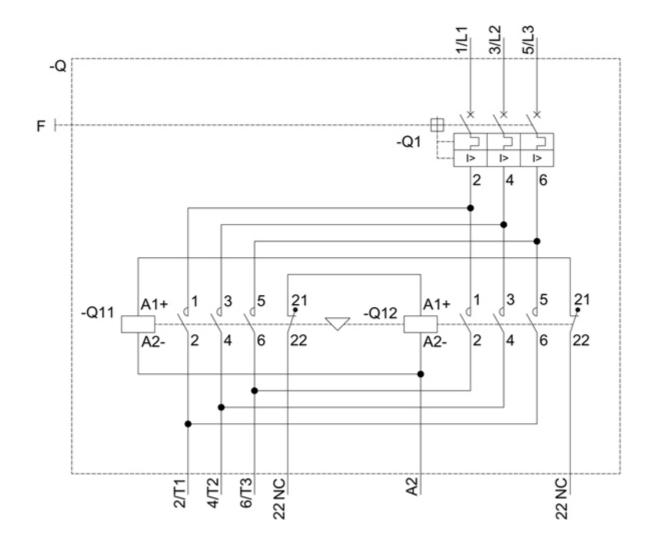

last modified:

12/15/2020 🖸