## SIEMENS

## Data sheet

## 3RU2116-1AJ0



Overload relay 1.1...1.6 A Thermal For motor protection Size S00, Class 10 Contactor mounting Main circuit: Ring cable lug Auxiliary circuit: ring cable lug Manual-Automatic-Reset

product brand name	SIRIUS
product designation	thermal overload relay
product type designation	3RU2
General technical data	
size of overload relay	S00
size of contactor can be combined company-specific	S00
power loss [W] for rated value of the current at AC in hot operating state	5.7 W
• per pole	1.9 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation in networks with grounded star point	
<ul> <li>between auxiliary and auxiliary circuit</li> </ul>	440 V
<ul> <li>between auxiliary and auxiliary circuit</li> </ul>	440 V
<ul> <li>between main and auxiliary circuit</li> </ul>	440 V
<ul> <li>between main and auxiliary circuit</li> </ul>	440 V
shock resistance acc. to IEC 60068-2-27	8g / 11 ms
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD
certificate of suitability according to ATEX directive 2014/34/EU	DMT 98 ATEX G 001
reference code acc. to IEC 81346-2	F
Substance Prohibitance (Date)	01.10.2009 00:00:00
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
<ul> <li>ambient temperature during operation</li> </ul>	-40 +70 °C
<ul> <li>ambient temperature during storage</li> </ul>	-55 +80 °C
<ul> <li>ambient temperature during transport</li> </ul>	-55 +80 °C
temperature compensation	-40 +60 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current-dependent overload release	1.1 1.6 A
<ul> <li>operating voltage rated value</li> </ul>	690 V
<ul> <li>operating voltage at AC-3 rated value maximum</li> </ul>	690 V

	<b>FO OO</b> 11
operating frequency rated value	50 60 Hz
operational current rated value	1.6 A
operating power at AC-3	
• at 400 V rated value	0.55 kW
<ul> <li>at 500 V rated value</li> </ul>	0.75 kW
at 690 V rated value	1.1 kW
Auxiliary circuit	
design of the auxiliary switch	integrated
number of NC contacts for auxiliary contacts	1
note	for contactor disconnection
number of NO contacts for auxiliary contacts	1
note	for message "Tripped"
number of CO contacts for auxiliary contacts	0
operational current of auxiliary contacts at AC-15	
• at 24 V	3 A
• at 110 V	3 A
• at 120 V	3 A
• at 125 V	3 A
• at 230 V	2 A
• at 400 V	1 A
operational current of auxiliary contacts at DC-13	
• at 24 V	2 A
• at 60 V	0.3 A
• at 110 V	0.22 A
• at 125 V	0.22 A
• at 220 V	0.11 A
contact rating of auxiliary contacts according to UL	B600 / R300
Protective and monitoring functions	
trip class	CLASS 10
•	
design of the overload release	thermal
design of the overload release UL/CSA ratings	thermal
	thermal
UL/CSA ratings	thermal 1.6 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value	1.6 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value	1.6 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection	1.6 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required	1.6 A 1.6 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch	1.6 A 1.6 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position	1.6 A 1.6 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions	1.6 A 1.6 A fuse gG: 6 A, quick: 10 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height	1.6 A 1.6 A fuse gG: 6 A, quick: 10 A any Contactor mounting 76 mm
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width	1.6 A 1.6 A fuse gG: 6 A, quick: 10 A any Contactor mounting
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height	1.6 A 1.6 A fuse gG: 6 A, quick: 10 A any Contactor mounting 76 mm
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width	1.6 A 1.6 A fuse gG: 6 A, quick: 10 A any Contactor mounting 76 mm 45 mm
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth	1.6 A 1.6 A fuse gG: 6 A, quick: 10 A any Contactor mounting 76 mm 45 mm
UL/CSA ratings full-load current (FLA) for 3-phase AC motor <ul> <li>at 480 V rated value</li> <li>at 600 V rated value</li> </ul> <li>Short-circuit protection         <ul> <li>design of the fuse link</li> <li>for short-circuit protection of the auxiliary switch required</li> </ul> </li> <li>Installation/ mounting/ dimensions         <ul> <li>mounting position</li> <li>fastening method</li> <li>height</li> <li>width</li> <li>depth</li> </ul> </li> <li>Connections/ Terminals         <ul> <li>product function removable terminal for auxiliary and</li> </ul> </li>	1.6 A 1.6 A fuse gG: 6 A, quick: 10 A any Contactor mounting 76 mm 45 mm 70 mm
UL/CSA ratings         full-load current (FLA) for 3-phase AC motor         • at 480 V rated value         • at 600 V rated value         Short-circuit protection         design of the fuse link         • for short-circuit protection of the auxiliary switch required         Installation/ mounting/ dimensions         mounting position         fastening method         height         width         depth         Connections/ Terminals         product function removable terminal for auxiliary and control circuit	1.6 A 1.6 A fuse gG: 6 A, quick: 10 A any Contactor mounting 76 mm 45 mm 70 mm
UL/CSA ratings         full-load current (FLA) for 3-phase AC motor         • at 480 V rated value         • at 600 V rated value         Short-circuit protection         design of the fuse link         • for short-circuit protection of the auxiliary switch required         Installation/ mounting/ dimensions         mounting position         fastening method         height         width         depth         Connections/ Terminals         product function removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit	1.6 A 1.6 A fuse gG: 6 A, quick: 10 A any Contactor mounting 76 mm 45 mm 70 mm
UL/CSA ratings         full-load current (FLA) for 3-phase AC motor         • at 480 V rated value         • at 600 V rated value         Short-circuit protection         design of the fuse link         • for short-circuit protection of the auxiliary switch required         Installation/ mounting/ dimensions         mounting position         fastening method         height         width         depth         Connections/ Terminals         product function removable terminal for auxiliary and control circuit         type of electrical connection	1.6 A         1.6 A         fuse gG: 6 A, quick: 10 A         any         Contactor mounting         76 mm         45 mm         70 mm         No         Ring cable lug connection
UL/CSA ratings         full-load current (FLA) for 3-phase AC motor         • at 480 V rated value         • at 600 V rated value         Short-circuit protection         design of the fuse link         • for short-circuit protection of the auxiliary switch required         Installation/ mounting/ dimensions         mounting position         fastening method         height         width         depth         Connections/ Terminals         product function removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit	1.6 A         1.6 A         fuse gG: 6 A, quick: 10 A         any         Contactor mounting         76 mm         45 mm         70 mm         No         Ring cable lug connection ring cable connection
UL/CSA ratings         full-load current (FLA) for 3-phase AC motor         • at 480 V rated value         • at 600 V rated value         Short-circuit protection         design of the fuse link         • for short-circuit protection of the auxiliary switch required         Installation/ mounting/ dimensions         mounting position         fastening method         height         width         depth         Connections/ Terminals         product function removable terminal for auxiliary and control circuit         type of electrical connection         • for auxiliary and control circuit         arrangement of electrical connectors for main current circuit         • tightening torque	1.6 A         1.6 A         1.6 A         fuse gG: 6 A, quick: 10 A         any         Contactor mounting         76 mm         45 mm         70 mm         No         Ring cable lug connection         ring cable connection         Top and bottom
UL/CSA ratings         full-load current (FLA) for 3-phase AC motor         • at 480 V rated value         • at 600 V rated value         Short-circuit protection         design of the fuse link         • for short-circuit protection of the auxiliary switch required         Installation/ mounting/ dimensions         mounting position         fastening method         height         width         depth         Connections/ Terminals         product function removable terminal for auxiliary and control circuit         type of electrical connection         • for auxiliary and control circuit         arrangement of electrical connectors for main current circuit         • tightening torque         — for main contacts for ring cable lug	1.6 A         1.6 A         1.6 A         fuse gG: 6 A, quick: 10 A         any         Contactor mounting         76 mm         45 mm         70 mm         No         Ring cable lug connection         ring cable connection         Top and bottom         1.2 0.8 N·m
UL/CSA ratings         full-load current (FLA) for 3-phase AC motor         • at 480 V rated value         • at 600 V rated value         Short-circuit protection         design of the fuse link         • for short-circuit protection of the auxiliary switch required         Installation/ mounting/ dimensions         mounting position         fastening method         height         width         depth         Connections/ Terminals         product function removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         arrangement of electrical connectors for main current circuit         • tightening torque         — for main contacts for ring cable lug         — for auxiliary contacts for ring cable lug	1.6 A         1.6 A         1.6 A         fuse gG: 6 A, quick: 10 A         any         Contactor mounting         76 mm         45 mm         70 mm         No         Ring cable lug connection         ring cable connection         Top and bottom         1.2 0.8 N·m         0.8 1.2 N·m
UL/CSA ratings         full-load current (FLA) for 3-phase AC motor         • at 480 V rated value         • at 600 V rated value         Short-circuit protection         design of the fuse link         • for short-circuit protection of the auxiliary switch required         Installation/ mounting/ dimensions         mounting position         fastening method         height         width         depth         Connections/ Terminals         product function removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         arrangement of electrical connectors for main current circuit         • tightening torque         - for main contacts for ring cable lug         - for auxiliary contacts for ring cable lug         outer diameter of the usable ring cable lug maximum	1.6 A         1.6 A         1.6 A         fuse gG: 6 A, quick: 10 A         any         Contactor mounting         76 mm         45 mm         70 mm         No         Ring cable lug connection ring cable connection         Top and bottom         1.2 0.8 N·m         0.8 1.2 N·m         7.5 mm
UL/CSA ratings         full-load current (FLA) for 3-phase AC motor         • at 480 V rated value         • at 600 V rated value         Short-circuit protection         design of the fuse link         • for short-circuit protection of the auxiliary switch required         Installation/ mounting/ dimensions         mounting position         fastening method         height         width         depth         Connections/ Terminals         product function removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         arrangement of electrical connectors for main current circuit         • tightening torque         — for main contacts for ring cable lug         — for auxiliary contacts for ring cable lug	1.6 A         1.6 A         1.6 A         fuse gG: 6 A, quick: 10 A         any         Contactor mounting         76 mm         45 mm         70 mm         No         Ring cable lug connection ring cable connection         Top and bottom         1.2 0.8 N·m         0.8 1.2 N·m

design of the thread	of the connection sc	rew			
for main contacts		M3			
<ul> <li>of the auxiliary and control contacts</li> </ul>		M3			
Safety related data					
failure rate [FIT] with lo		o SN 31920	50 FIT		
MTTF with high demand rate		2 280 y			
T1 value for proof test interval or service life acc. to IEC 61508		20 y			
protection class IP on the front acc. to IEC 60529		IP00			
Display					
display version for switching status		Slide switch			
Certificates/ approvals	;				
General Product Ap	proval			For use in hazardo	us locations
		Ű	EHC	IECEx	KEx ATEX
Declaration of Confo	ormity	Test Certificat	es	Marine / Shipping	
CE EG-Konf.	<u>Miscellaneous</u>	<u>Type Test</u> <u>Certificates/T</u> <u>Report</u>	<u>Special Test</u> est <u>Certificate</u>	ABS	B U REAU VERITAS
Marine / Shipping					other
Lloyd's Register us	PRS	RINA	RMRS RMRS	DNV-GL DNV-GL	<u>Confirmation</u>
Railway					
Vibration and Shock					
Further information	vnloadcenter (Catalo	no. Drochuroc	<u> </u>		

https://www.siemens.com/ic10 Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2116-1AJ0


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2116-1AJ0


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RU2116-1AJ0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RU2116-1AJ0&lang=en Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current https://support.industry.siemens.com/cs/ww/en/ps/3RU2116-1AJ0/char Further characteristics (e.g. electrical endurance, switching frequency) http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RU2116-1AJ0&objecttype=14&gridview=view1

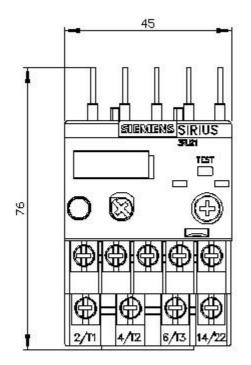

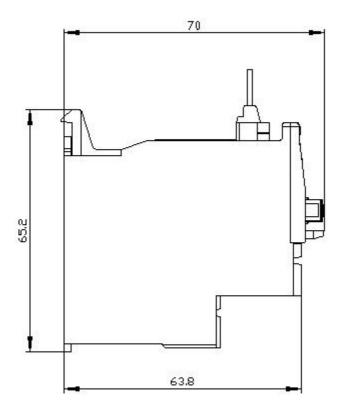

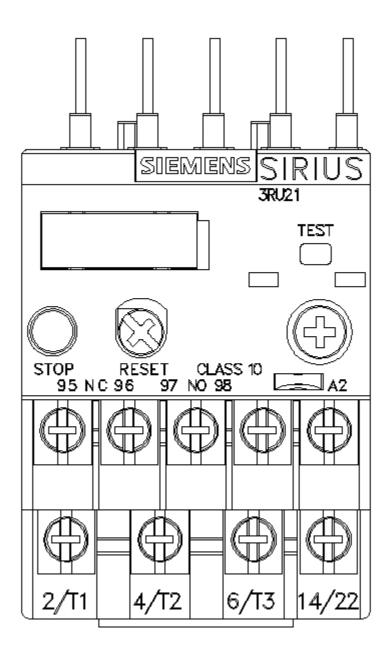

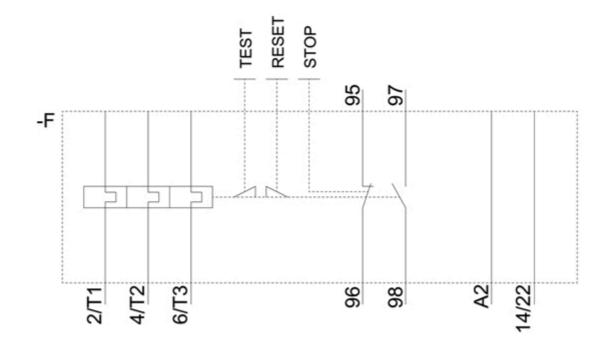

last modified:

1/18/2021 🖸