



Picture differs from the item.

Color: ■■■■■■

Data

Electrical data

Ratings per IEC/EN

Nominal voltage (III/3)	800 V
Rated current	32 A

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastraße 27

32423 Minden

Phone: +49 571 887-0 | Fax: +49 571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

Ex information

Rated current (Ex e II)	30 A
-------------------------	------

Physical data

Width	35.2 mm / 1.386 inches
Height	4.1 mm / 0.161 inches
Depth	19 mm / 0.748 inches
Jumper assignment	1-2-3-4-5-6

Material data

Note (material data)

Information on material specifications can be found here

Color	light gray
Fire load	0.022 MJ
Weight	4.5 g

Commercial data

Product Group	22 (TOPJOB S)
eCl@ss 10.0	27-14-11-40
eCl@ss 9.0	27-14-11-40
ETIM 8.0	EC000489
ETIM 7.0	EC000489
PU (SPU)	25 pcs
Packaging type	bag
Country of origin	DE
GTIN	4017332069465
Customs tariff number	85366990990

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

Declarations of conformity and manufacturer's declarations

Logo	Approval	Additional Approval Text	Certificate name

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastra. 27 32423 Minden Phone: +49571 887-0 Fax: +49571 887-169 Email: info.de@wago.com Web: www.wago.com	Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.
---	--



Railway
WAGO GmbH & Co. KG

Railway
Ready

Downloads

Documentation

Bid Text

2004-406	2019 Feb 19	xml	Download
X81 - Datei		2.6 kB	
2004-406	2017 Apr 28	doc	Download
doc - Datei		24.1 kB	

Additional Information

	pdf	Download
	2.3 MB	

CAD/CAE-Data

CAD data

2D/3D Models 2004-406	URL	Download
-----------------------	---------------------	--------------------------

CAE data

EPLAN Data Portal 2004-406	URL	Download
WSCAD Universe 2004-406	URL	Download
ZUKEN Portal 2004-406	URL	Download

Asset Administration Shell

Asset Administration Shell 2004-406	URL	Download
-------------------------------------	---------------------	--------------------------

Environmental Product Compliance

Compliance Search



Environmental Product Compliance 2004-406	URL	Download
---	---------------------	--------------------------

Subject to changes. Please also observe the further product documentation!

Jumper; 6-way; insulated; light gray

Installation Notes

Commoning

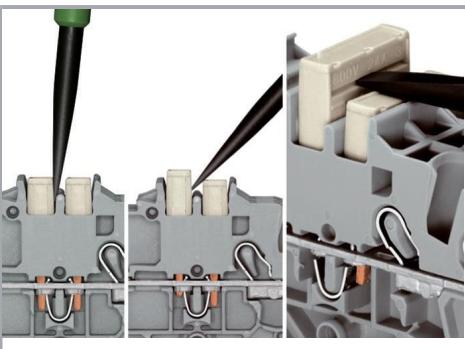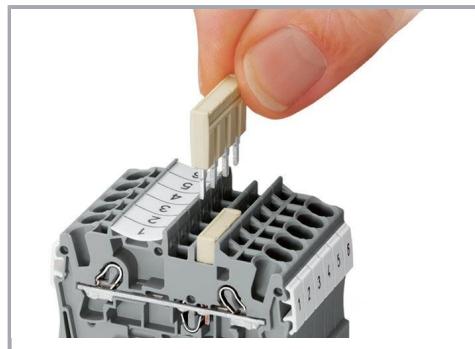

Insert push-in type jumper bar and push down until it hits backstop.

Removing a push-in type jumper bar:

Insert the operating tool between the jumper and partition wall of the dual jumper slots, then lift up the jumper.

Place the operating tool in the center of jumpers for up to five contacts (see above), or alternately on both sides for jumpers with more than five contacts.

Commoning



Custom jumpers are created by breaking and removing jumper contacts (2000, 2001, 2002, 2004 Series).

Marking with a felt-tip pen.

Commoning

Subject to changes. Please also observe the further product documentation!


WAGO GmbH & Co. KG

Hansastra. 27
32423 Minden


Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

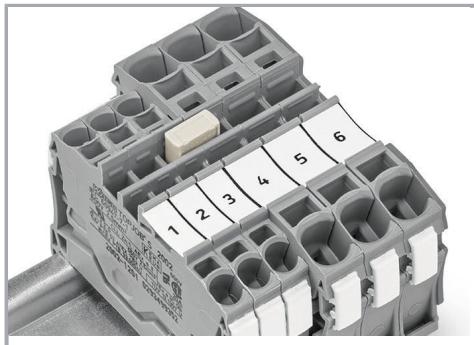


Stepping down via push-in type jumper bar.

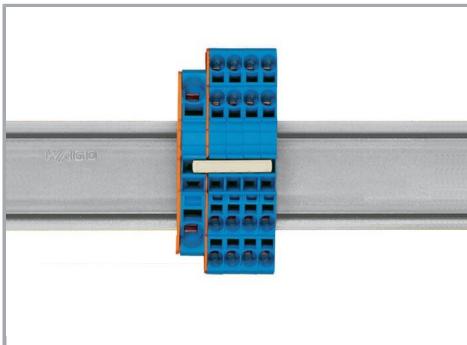


Stepping down via push-in type jumper bar:

Commoning via closed terminal side with end plate allows jumpering over two cross-section sizes, e.g., from 16 mm² (6 AWG) to 6 mm² (10 AWG) or from 6 mm² (10 AWG) to 2.5 mm² (14 AWG) (see illustration above).

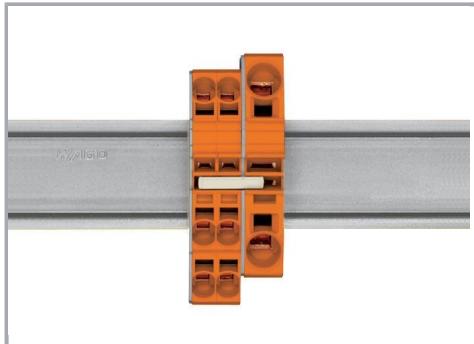

Stepping down via push-in type jumper bar:

Commoning via open terminal side with end plate allows jumpering over two cross-section sizes for 16 mm² (6 AWG) and 10 mm² (8 AWG) and one cross-section size for 6/4/2.5 mm² (10 /12/14 AWG). An example: from 16 mm² (6 AWG) to 6 mm² (10 AWG) (see illustration above) or from 10 mm² (8 AWG) to 4 mm² (12 AWG).

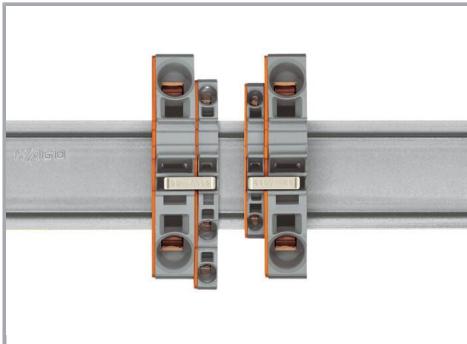

Note:

The total current of the outgoing circuits must not exceed the nominal current of the step-down jumper/push-in type jumper bar.

Product family

TOPJOB® S

TOPJOB® S: In various industrial applications and modern building installations, WAGO's wide and versatile range of rail-mount terminal blocks provides more than just reliable electrical connections.

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49 571 887-0 | Fax: +49 571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.