
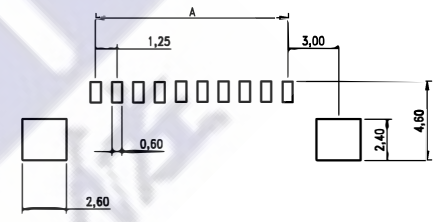

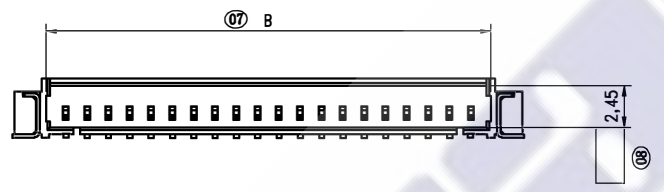
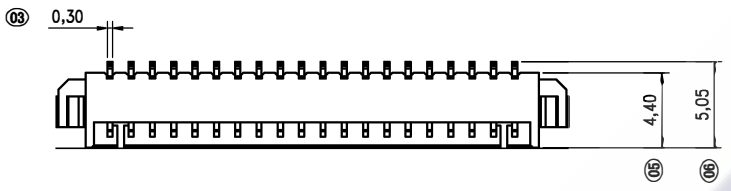


REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			NEW RELEASE	2007-11-01	

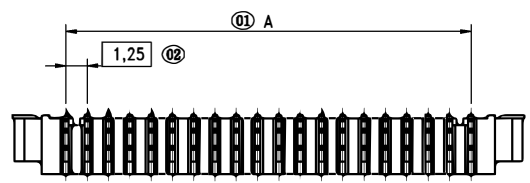

PCB LAYOUT  
TOLERANCE: ±0.05

Pin	Dim A	Dim B
02	1.25	3.10
03	2.50	4.35
04	3.75	5.60
05	5.00	6.85
06	6.25	8.10
07	7.50	9.35
08	8.75	10.60
09	10.00	11.85
10	11.25	13.10
11	12.50	14.35
12	13.75	15.60
13	15.00	16.85
14	16.25	18.10
15	17.50	19.35
16	18.75	20.60
17	20.00	21.85
18	21.25	23.10
19	22.50	24.35
20	23.75	25.60
21	25.00	26.85
22	26.25	28.10
23	27.50	29.35
24	28.75	30.60
25	30.00	31.85
26	31.25	33.10
27	32.50	34.35
28	33.75	35.60
29	35.00	36.85

Notes :

- Material:
  - Housing: PA46 (UL94V-0)
  - Contact: PB(190-210HV),T=0.30
  - Contact: PB(190-210HV),T=0.20
- Planting:
 

Tin/Lead 100~150u" over 40~50u" Nickel.
- Contact Retention force: 0.5Kgf /Pin Min.
- ▽ Shoule Be Measured By Qip.
- ⊗ Shoule Be Measured By Fai.

DIM	TOL	DIM	TOL
X	±0.10	X'	±2.0'
X.X	±0.075	X.X'	±1.5'
X.XX	±0.05	X.XX'	±1.0'
X.XXX	±0.01	X.XXX'	±0.5'

三佐部品【中国】股份有限公司			
DRAW NO	DATE	MATERIAL: SEE NOTES	DRAW NAML.
DESIGN:		FINISH: SEE NOTES	1.25 B 卧贴
CHECK:		FILE:	MODEL:
REVIEW:		P/N: SEE TABLE	UNIT: mm
APPROVED		REV. A0	SHEET: 1/1
		SCALE	