

版本(Ed)	变更摘要 (Change The Content)	日期(Date)
0	新产品发行 (New Product Launch)	2017/01/02
1	胶芯主体修改改善成品共面度 (Plastic core desigm changes to improve coplanarity)	2018/08/22

技术指标 (Technical Index) :

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
(The surface of the plastic parts should be smooth, no rough edges, no obvious shrinkage, defects, cracks and other phenomena)
2. 不同pin位吸盖加入/取出力有差异, 实属正常现象。
(It is normal than there are difference between suction cap and suction cap at different Pin positions)
3. 温度范围 (Temperature range): -40° C~85° C.
4. 额定电压 (Rated voltage): 200V, AC.
5. 接触电阻 (Contact resistance):
≤55mΩ (initial) per contact, ≤25mΩ Change allowed.
6. 绝缘电阻 (Insulation resistance): ≥1000MΩ.
7. 产品料号 (Product material No.): WT200FL—** ** *


NO OF CKT (产品PIN数)

- Plating (电镀方式)
- 0: 端子全雾锡 (Terminal all mist tin)
 - 1: 端子全金 (Terminal g/F OVER ALL)
 - 4: 端子全亮锡 (Terminal all bright tin)


Packing (包装方式)

- T: TUBE管装
- R: TAPE & REEL 卷装
- C: TAPE & REEL WITH COVER加吸盖卷装

CKT	DIM A	DIM B	DIM C
2	2.00	4.80	7.95
3	4.00	6.80	9.95
4	6.00	8.80	11.95
5	8.00	10.80	13.95
6	10.00	12.80	15.95
7	12.00	14.80	17.95
8	14.00	16.80	19.95
9	16.00	18.80	21.95
10	18.00	20.80	23.95
11	20.00	22.80	25.95
12	22.00	24.80	27.95
13	24.00	26.80	29.95
14	26.00	28.80	31.95
15	28.00	30.80	33.95
16	30.00	32.80	35.95
17	32.00	34.80	37.95
18	34.00	36.80	39.95
19	36.00	38.80	41.95
20	38.00	40.80	43.95

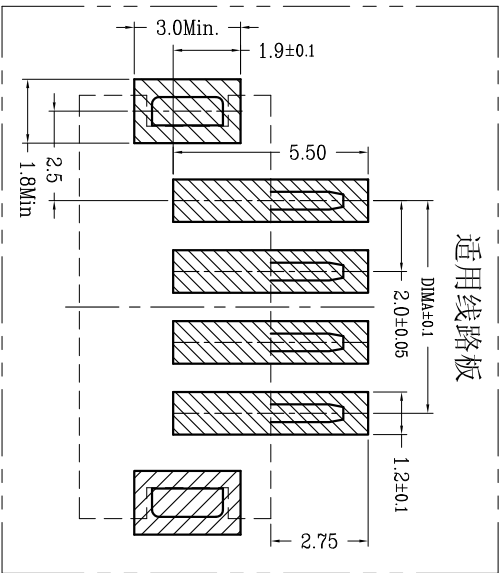

适用线路板

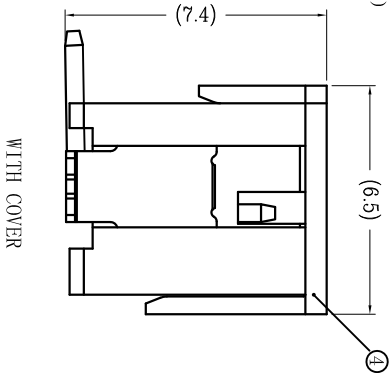

三佐部品【中国】股份有限公司

品名 (TITLE) 2.00 Pitch F型立式WTB

料号 (DRAWNO) WT200FL—** ** *

比例 (SCALE) 1:1

一般公差 (TOLERANCE)
X ±0.50 XX ±1.0
X ±0.20 XXX ±0.5
ANGLES ±1°



制图 (DR)	审核 (APP)
Anlan	黄志明
校对 (CHKD)	王涛
张数 (SHEET)	1 OF 1
尺寸 (SIZE)	A4
版数 (REV)	A