

ZM47xxxPF Series


Silicon Planar Power Zener Diodes

for use in stabilizing and clipping circuits with high power rating. Standard Zener voltage tolerance is $\pm 10\%$. Add suffix "A" for $\pm 5\%$ tolerance and suffix "B" for $\pm 2\%$ tolerance. Other tolerances available are upon request.

Features

- Lead Free

LL-41

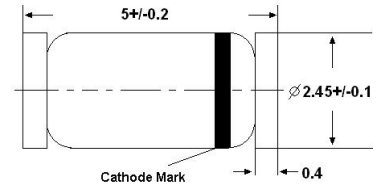

Glass case MELF
Dimensions in mm


Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Power Dissipation ¹⁾	P_D	1	W
Operating Junction Temperature	T_j	175	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 65 to + 175	$^\circ\text{C}$

Thermal Characteristics

Parameter	Symbol	Max.	Unit
Thermal Resistance Junction to Ambient ¹⁾	$R_{\theta JA}$	150	$^\circ\text{C}/\text{W}$

¹⁾ Valid provided that leads at a distance of 8 mm from case are kept at ambient temperature.



ZM47xxxPF Series

Characteristics at $T_a = 25^\circ\text{C}$ (V_F max : 1.2 V at $I_F = 200$ mA)


Type	Zener Voltage ³⁾			Dynamic Resistance ¹⁾			Reverse Current		Maximum Surge Current ⁴⁾	Maximum Regulator Current ²⁾	
	V_{Znom}	V_Z		at I_{ZT}	Z_{ZT} at I_{ZT}	Z_{ZK}	at I_{ZK}	I_R	at V_R	at $T_a = 25^\circ\text{C}$	
	(V)	Min. (V)	Max. (V)	(mA)	Max. (Ω)	Max. (Ω)	(mA)	Max. (μA)	(V)	I_{ZSM} (mA)	I_{ZM} (mA)
ZM4727PF	3	2.70	3.30	83	10	400	1	150	1	1375	275
ZM4728PF	3.3	2.97	3.63	76	10	400	1	150	1	1375	275
ZM4729PF	3.6	3.24	3.96	69	10	400	1	100	1	1260	252
ZM4730PF	3.9	3.51	4.29	64	9	400	1	100	1	1190	234
ZM4731PF	4.3	3.87	4.73	58	9	400	1	50	1	1070	217
ZM4732PF	4.7	4.23	5.17	53	8	500	1	10	1	970	193
ZM4733PF	5.1	4.59	5.61	49	7	550	1	10	1	890	178
ZM4734PF	5.6	5.04	6.16	45	5	600	1	10	2	810	162
ZM4735PF	6.2	5.58	6.82	41	2	700	1	10	3	730	146
ZM4736PF	6.8	6.12	7.48	37	3.5	700	1	10	4	660	133
ZM4737PF	7.5	6.75	8.25	34	4	700	0.5	10	5	605	121
ZM4738PF	8.2	7.38	9.02	31	4.5	700	0.5	10	6	550	110
ZM4739PF	9.1	8.19	10.01	28	5	700	0.5	10	7	500	100
ZM4740PF	10	9.00	11.00	25	7	700	0.25	10	7.6	454	91
ZM4741PF	11	9.90	12.10	23	8	700	0.25	5	8.4	414	83
ZM4742PF	12	10.80	13.20	21	9	700	0.25	5	9.1	380	76
ZM4743PF	13	11.70	14.30	19	10	700	0.25	5	9.9	344	69
ZM4744PF	15	13.50	16.50	17	14	700	0.25	5	11.4	304	61
ZM4745PF	16	14.40	17.60	15.5	16	700	0.25	5	12.2	285	57
ZM4746PF	18	16.20	19.80	14	20	750	0.25	5	13.7	250	50
ZM4747PF	20	18.00	22.00	12.5	22	750	0.25	5	15.2	225	45
ZM4748PF	22	19.80	24.20	11.5	23	750	0.25	5	16.7	205	41
ZM4749PF	24	21.60	26.40	10.5	25	750	0.25	5	18.2	190	38
ZM4750PF	27	24.30	29.70	9.5	35	750	0.25	5	20.6	170	34
ZM4751PF	30	27.00	33.00	8.5	40	1000	0.25	5	22.8	150	30
ZM4752PF	33	29.70	36.30	7.5	45	1000	0.25	5	25.1	135	27
ZM4753PF	36	32.40	39.60	7	50	1000	0.25	5	27.4	125	25
ZM4754PF	39	35.10	42.90	6.5	60	1000	0.25	5	29.7	115	23
ZM4755PF	43	38.70	47.30	6	70	1500	0.25	5	32.7	110	22
ZM4756PF	47	42.30	51.70	5.5	80	1500	0.25	5	35.8	95	19
ZM4757PF	51	45.90	56.10	5	95	1500	0.25	5	38.8	90	18
ZM4758PF	56	50.40	61.60	4.5	110	2000	0.25	5	42.6	80	16
ZM4759PF	62	55.80	68.20	4	125	2000	0.25	5	47.1	70	14
ZM4760PF	68	61.20	74.80	3.7	150	2000	0.25	5	51.7	65	13
ZM4761PF	75	67.50	82.50	3.3	175	2000	0.25	5	56	60	12

¹⁾ The dynamic resistance is derived from the 60 Hz AC voltage which results when an AC current having an RMS value equal to 10% of the Zener Current (I_{ZT} or I_{ZK}) is superimposed on I_{ZT} or I_{ZK} . Dynamic resistance is measured at two points to insure a sharp knee on the breakdown curve and to eliminate unstable units.

²⁾ Valid provided that electrodes are kept at ambient temperature.

³⁾ Tested with pulses $t_p = 20$ ms.

⁴⁾ The rating listed in the electrical characteristics table is maximum peak, non-repetitive, reverse surge current of 1/2 square wave or equivalent sine wave pulse of 1/120 second duration superimposed on the test current I_{ZT} .



ZM47xxxPF Series

Characteristics at $T_a = 25^\circ\text{C}$ (V_F max : 1.2 V at $I_F = 200$ mA)


Type	Zener Voltage ³⁾			Dynamic Resistance ¹⁾			Reverse Current		Maximum Surge Current ⁴⁾ at $T_a = 25^\circ\text{C}$	Maximum Regulator Current ²⁾	
	V_{Znom}	V_Z		at I_{ZT}	Z_{ZT} at I_{ZT}	Z_{ZK}	at I_{ZK}	I_R			at V_R
	(V)	Min. (V)	Max. (V)	(mA)	Max. (Ω)	Max. (Ω)	(mA)	Max. (μA)	(V)	I_{ZSM} (mA)	I_{ZM} (mA)
ZM4727APF	3	2.85	3.15	83	10	400	1	150	1	1375	275
ZM4728APF	3.3	3.14	3.47	76	10	400	1	150	1	1375	275
ZM4729APF	3.6	3.42	3.78	69	10	400	1	100	1	1260	252
ZM4730APF	3.9	3.71	4.10	64	9	400	1	100	1	1190	234
ZM4731APF	4.3	4.09	4.52	58	9	400	1	50	1	1070	217
ZM4732APF	4.7	4.47	4.94	53	8	500	1	10	1	970	193
ZM4733APF	5.1	4.85	5.36	49	7	550	1	10	1	890	178
ZM4734APF	5.6	5.32	5.88	45	5	600	1	10	2	810	162
ZM4735APF	6.2	5.89	6.51	41	2	700	1	10	3	730	146
ZM4736APF	6.8	6.46	7.14	37	3.5	700	1	10	4	660	133
ZM4737APF	7.5	7.13	7.88	34	4	700	0.5	10	5	605	121
ZM4738APF	8.2	7.79	8.61	31	4.5	700	0.5	10	6	550	110
ZM4739APF	9.1	8.65	9.56	28	5	700	0.5	10	7	500	100
ZM4740APF	10	9.50	10.50	25	7	700	0.25	10	7.6	454	91
ZM4741APF	11	10.45	11.55	23	8	700	0.25	5	8.4	414	83
ZM4742APF	12	11.40	12.60	21	9	700	0.25	5	9.1	380	76
ZM4743APF	13	12.35	13.65	19	10	700	0.25	5	9.9	344	69
ZM4744APF	15	14.25	15.75	17	14	700	0.25	5	11.4	304	61
ZM4745APF	16	15.20	16.80	15.5	16	700	0.25	5	12.2	285	57
ZM4746APF	18	17.10	18.90	14	20	750	0.25	5	13.7	250	50
ZM4747APF	20	19.00	21.00	12.5	22	750	0.25	5	15.2	225	45
ZM4748APF	22	20.90	23.10	11.5	23	750	0.25	5	16.7	205	41
ZM4749APF	24	22.80	25.20	10.5	25	750	0.25	5	18.2	190	38
ZM4750APF	27	25.65	28.35	9.5	35	750	0.25	5	20.6	170	34
ZM4751APF	30	28.50	31.50	8.5	40	1000	0.25	5	22.8	150	30
ZM4752APF	33	31.35	34.65	7.5	45	1000	0.25	5	25.1	135	27
ZM4753APF	36	34.20	37.80	7	50	1000	0.25	5	27.4	125	25
ZM4754APF	39	37.05	40.95	6.5	60	1000	0.25	5	29.7	115	23
ZM4755APF	43	40.85	45.15	6	70	1500	0.25	5	32.7	110	22
ZM4756APF	47	44.65	49.35	5.5	80	1500	0.25	5	35.8	95	19
ZM4757APF	51	48.45	53.55	5	95	1500	0.25	5	38.8	90	18
ZM4758APF	56	53.20	58.80	4.5	110	2000	0.25	5	42.6	80	16
ZM4759APF	62	58.90	65.10	4	125	2000	0.25	5	47.1	70	14
ZM4760APF	68	64.60	71.40	3.7	150	2000	0.25	5	51.7	65	13
ZM4761APF	75	71.25	78.75	3.3	175	2000	0.25	5	56	60	12

¹⁾ The dynamic resistance is derived from the 60 Hz AC voltage which results when an AC current having an RMS value equal to 10% of the Zener Current (I_{ZT} or I_{ZK}) is superimposed on I_{ZT} or I_{ZK} . Dynamic resistance is measured at two points to insure a sharp knee on the breakdown curve and to eliminate unstable units.

²⁾ Valid provided that electrodes are kept at ambient temperature.

³⁾ Tested with pulses $t_p = 20$ ms.

⁴⁾ The rating listed in the electrical characteristics table is maximum peak, non-repetitive, reverse surge current of 1/2 square wave or equivalent sine wave pulse of 1/120 second duration superimposed on the test current I_{ZT} .



ZM47xxxPF Series

Characteristics at $T_a = 25^\circ\text{C}$ (V_F max : 1.2 V at $I_F = 200$ mA)


Type	Zener Voltage ³⁾				Dynamic Resistance ¹⁾			Reverse Current		Maximum Surge Current ⁴⁾ at $T_a = 25^\circ\text{C}$	Maximum Regulator Current ²⁾
	V_{Znom}	V_Z		at I_{ZT}	Z_{ZT} at I_{ZT}	Z_{ZK}	at I_{ZK}	I_R	at V_R		
	(V)	Min. (V)	Max. (V)	(mA)	Max. (Ω)	Max. (Ω)	(mA)	Max. (μA)	(V)	I_{ZSM} (mA)	I_{ZM} (mA)
ZM4727BPF	3	2.94	3.06	83	10	400	1	150	1	1375	275
ZM4728BPF	3.3	3.23	3.37	76	10	400	1	150	1	1375	275
ZM4729BPF	3.6	3.53	3.67	69	10	400	1	100	1	1260	252
ZM4730BPF	3.9	3.82	3.98	64	9	400	1	100	1	1190	234
ZM4731BPF	4.3	4.21	4.39	58	9	400	1	50	1	1070	217
ZM4732BPF	4.7	4.61	4.79	53	8	500	1	10	1	970	193
ZM4733BPF	5.1	5.00	5.20	49	7	550	1	10	1	890	178
ZM4734BPF	5.6	5.49	5.71	45	5	600	1	10	2	810	162
ZM4735BPF	6.2	6.08	6.32	41	2	700	1	10	3	730	146
ZM4736BPF	6.8	6.66	6.94	37	3.5	700	1	10	4	660	133
ZM4737BPF	7.5	7.35	7.65	34	4	700	0.5	10	5	605	121
ZM4738BPF	8.2	8.04	8.36	31	4.5	700	0.5	10	6	550	110
ZM4739BPF	9.1	8.92	9.28	28	5	700	0.5	10	7	500	100
ZM4740BPF	10	9.80	10.20	25	7	700	0.25	10	7.6	454	91
ZM4741BPF	11	10.78	11.22	23	8	700	0.25	5	8.4	414	83
ZM4742BPF	12	11.76	12.24	21	9	700	0.25	5	9.1	380	76
ZM4743BPF	13	12.74	13.26	19	10	700	0.25	5	9.9	344	69
ZM4744BPF	15	14.70	15.30	17	14	700	0.25	5	11.4	304	61
ZM4745BPF	16	15.68	16.32	15.5	16	700	0.25	5	12.2	285	57
ZM4746BPF	18	17.64	18.36	14	20	750	0.25	5	13.7	250	50
ZM4747BPF	20	19.60	20.40	12.5	22	750	0.25	5	15.2	225	45
ZM4748BPF	22	21.56	22.44	11.5	23	750	0.25	5	16.7	205	41
ZM4749BPF	24	23.52	24.48	10.5	25	750	0.25	5	18.2	190	38
ZM4750BPF	27	26.46	27.54	9.5	35	750	0.25	5	20.6	170	34
ZM4751BPF	30	29.40	30.60	8.5	40	1000	0.25	5	22.8	150	30
ZM4752BPF	33	32.34	33.66	7.5	45	1000	0.25	5	25.1	135	27
ZM4753BPF	36	35.28	36.72	7	50	1000	0.25	5	27.4	125	25
ZM4754BPF	39	38.22	39.78	6.5	60	1000	0.25	5	29.7	115	23
ZM4755BPF	43	42.14	43.86	6	70	1500	0.25	5	32.7	110	22
ZM4756BPF	47	46.06	47.94	5.5	80	1500	0.25	5	35.8	95	19
ZM4757BPF	51	49.98	52.02	5	95	1500	0.25	5	38.8	90	18
ZM4758BPF	56	54.88	57.12	4.5	110	2000	0.25	5	42.6	80	16
ZM4759BPF	62	60.76	63.24	4	125	2000	0.25	5	47.1	70	14
ZM4760BPF	68	66.64	69.36	3.7	150	2000	0.25	5	51.7	65	13
ZM4761BPF	75	73.50	76.50	3.3	175	2000	0.25	5	56	60	12

¹⁾ The dynamic resistance is derived from the 60 Hz AC voltage which results when an AC current having an RMS value equal to 10% of the Zener Current (I_{ZT} or I_{ZK}) is superimposed on I_{ZT} or I_{ZK} . Dynamic resistance is measured at two points to insure a sharp knee on the breakdown curve and to eliminate unstable units.

²⁾ Valid provided that electrodes are kept at ambient temperature.

³⁾ Tested with pulses $t_p = 20$ ms.

⁴⁾ The rating listed in the electrical characteristics table is maximum peak, non-repetitive, reverse surge current of 1/2 square wave or equivalent sine wave pulse of 1/120 second duration superimposed on the test current I_{ZT} .



ZM47xxxPF Series

Electrical Characteristics Curves

Fig 1. Zener Characteristics Curve

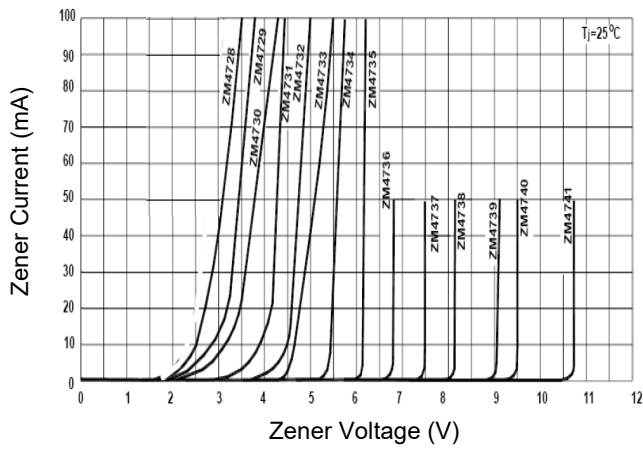


Fig 2. Zener Characteristics Curve


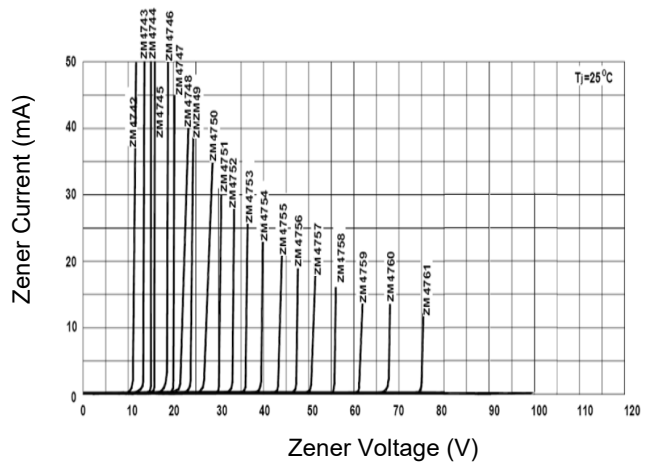


Fig 3. Power Derating Curve



Disclaimer: Our company reserve the right to make modifications, enhancements, improvements, corrections or other changes to improve product design, functions and reliability, anytime without notice. Semtech Electronics Limited makes no warranties, representations or warranties regarding the suitability of its products for any particular purpose, and does not accept any liability arising from the application or use of any product or circuit such as: Apply to medical, military, aircraft, space or life support equipment and expressly waive any and all liability, including but not limited to special, consequential or collateral damage.

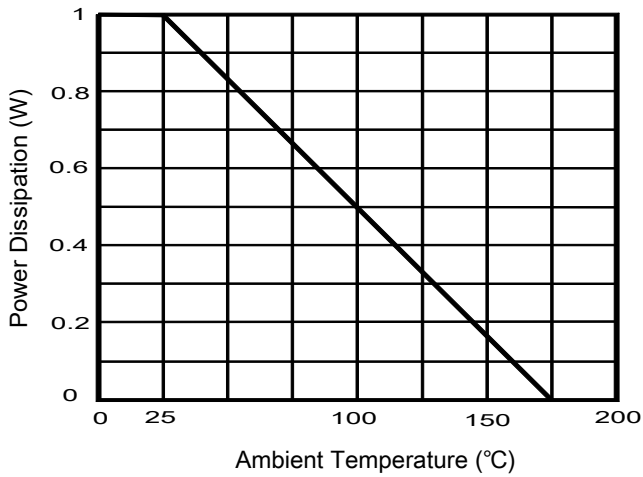