




[Schematic]

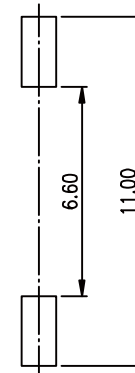

[推钮行程]

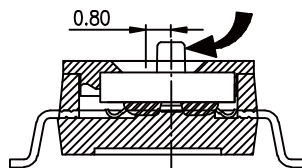

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

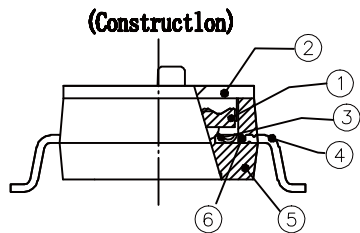

NOTES :

1.Specification:

- 1>.Operating force:1000gf Max
- 2>.Operating Temperature:-40° to+85°
- 3>.Storage Temperature::-40° to+85°
- 4>.Mechanical Life:3000cycles minimum
- 5>.Electrical Life:2000cycles minimum

2. PLATING:

GOLD FLASH 1u"(min.) SOLDERTAIL,  
3u" GOLD PLATING ON THE CONTACT AREA,  
WITH 50u" NICKEL UNDERPLATINGOVERALL.

3. PART NUMBER DESCRIPTION

DS01- XX T S G E T  
 [包装方式: T-管装 R-Reel]  
 [电镀层: E-接触部3u" G-接触部3u" /焊接部1-2u"]  
 [G=鍍金 S=內金外鍍]  
 [脚型: S脚 / J脚 / H脚 / A脚 / Z脚]  
 [T= 低推贴胶 S=低推不贴胶 L=长推]  
 [产品P数: 02=2P 04=4P 06=6P 08=8P 10=10P 12=12P]

△			
△			
△			
△			
△			
SYM	DISCIPTION	DATE	APPROVED



蘇州寰立電子有限公司  
 HUANLI ELECTRONICS CO., LTD.

TOLERANCES UNLESS OTHERWISE SPECIFIED LINEAR: ±0.30 ANGULAR: ±3'		SIGNATURES		DATE	TITLE
DRAWN		Alvin		2016.08.18	DIP SW
CHK'D		Weiwei		2016.08.18	NO. DS01-01LSGET
APPV'D		Gavin		2016.08.18	
REVISIONS	SCALE				
A	5/1				