



Specifications

备注 (Remark)
 1. 材料 (MATERIAL)
 胶芯: PA9T+30%G.F UL94V-0, 颜色: 黑色.
 Housing: PA9T+30%G.F UL94V-0, Color: Black
 四方针: 黄铜, 镍底30u"MIN, 表面镀金1u"MIN
 Contact: Brass, 1u"MIN GOLD PLATING OVER ALL
 30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):
 额定电流: 3 AMP
 Raring Current: 3 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V/分钟.
 Withstanding Voltage: AC 500V/Minute.
 温度范围: -40° C to +105° C
 Temperature Range: -40° C to +105° C

客编:
 1. 带*为品质检验尺寸


注意事项

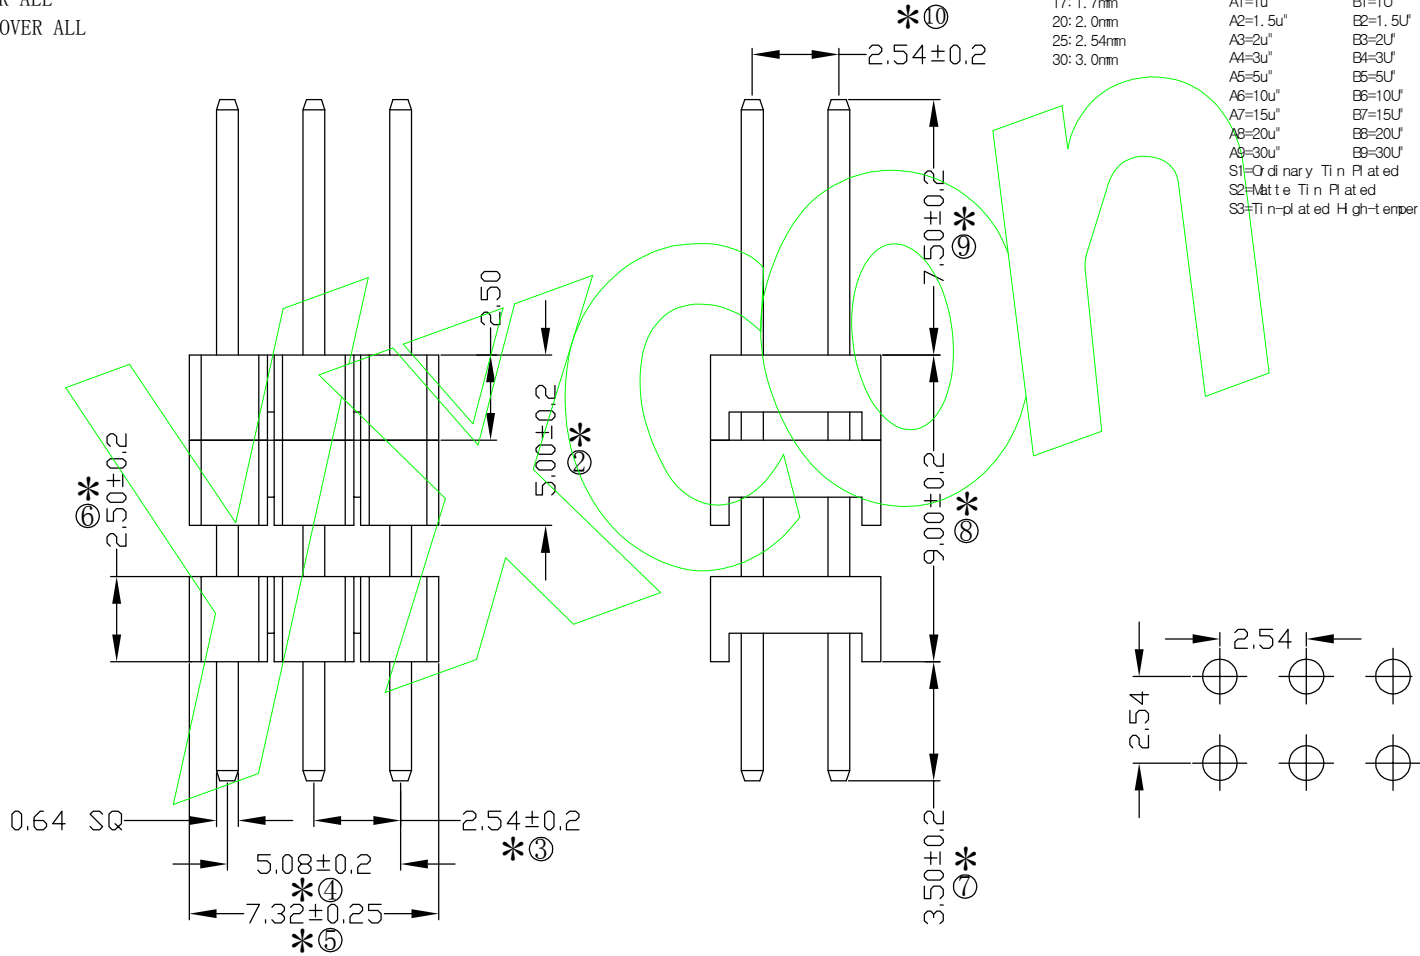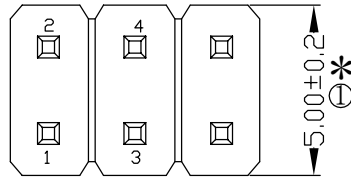

Ordering Information

P125-32 03 A0 C S 200 A 1

HEIGHT OF HOUSING	NO OF PINS PER ROW	Full of Gold	Contact Plating	INSULATOR MATERIAL	LENGTH OF TERMINAL	PACKING
15: 1.5mm	2-40P	A0=0.8u"	EO=0.8u"	A: PBT		A: PE Bag
17: 1.7mm		A1=1u"	B1=1u"	B: PA6T		B: Tape & Reel
20: 2.0mm		A2=1.5u"	B2=1.5u"	C: PA9T		C: Tube
25: 2.54mm		A3=2u"	B3=2u"	D: LCP		D: Tube+CAP
30: 3.0mm		A4=3u"	B4=3u"			E: Tray
		A5=5u"	B5=5u"			
		A6=10u"	B6=10u"			
		A7=15u"	B7=15u"			
		A8=20u"	B8=20u"			
		A9=30u"	B9=30u"			
		S1=Ordinary Tin Plated				
		S2=Matte Tin Plated				
		S3=Ti-n-plated High-temperature				



				OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co., Ltd.	
				X.X	+0.25	UNIT		MM			
				X.XX	+0.20	SHEET	A4	DESIGN	周芳杰	PART NO	P125-3203A0CS200A1
A0	2020.04.03	新版发行		周芳杰	刘贵宝	ANGLE	1/1	CHECK		TITLE	PH2.54*2.5+2.5+2.5 2*3P*3 L=20.0/3.5/7.5 180度 镀普金 PA9T料 袋装
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE	CUSTOMER NO.	