# TESC3R0V24B1X

# ESD SUPPRESSOR




#### **Features**


- SMD type zinc oxide based ceramic chip
- Lead free plating termination provided good solderability characteristic
- Insulator over coat keeps excellent low and stable leakage current
- Quick response time (<1ns)
- Low clamping voltage
- High transient current capability
- Meet IEC 61000-4-2 standard
- Compact size for EIA 0603

# **Applications**

- Application for Mother Board, Notebook, Cellular Phone, PDA, handheld devic DSC,DV,Scanner, and Set-Top Box etc.
- DSC, DV, Scanner, and Set-Top Box etc.
- Data port:Audio,Video,Keyboard,Charge etc.

# **Construction & Dimension**

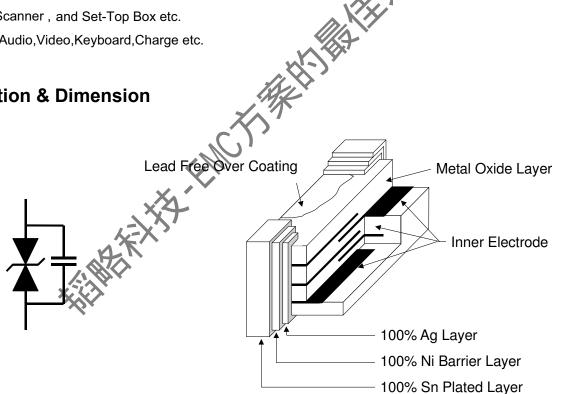



Unit: mm	0603
L	1.60±0.15
W	0.80±0.1
Т	0.80±0.1
С	0.30±0.20

# TESC3R0V24B1X

# Part ratings and characteristics

	Working	g voltage	Varistor voltage	Clamping Voltage	Capacitance	Peak current	Transient energy
Symbol	VRMS	VDC	Vv	Vc	Ср	İmax	W <sub>max</sub>
Units	Volts	Volts	Volts	Volts	pF	Amps	Joules
Units	(Max.)	(Max.)		(Max.)	(Typical)	(Max.)	(Max.)
Test Condition		< 10 µA	1mA DC	1Α 8/20μs	1MHz	8/20μs	10/1000µs
TESC3R0V24B1X	-	24	45 ~65	135	3	-	-

 $V_{\text{RMS}}$  – Maximum AC operating voltage the varistor can maintain and not exceed10µA leakage current

V<sub>DC</sub> – Maximum DC operating voltage the varistor can maintain and not exceed 10µA leakage current

- V<sub>V</sub> Voltage across the device measured at 1mA DC current. EquiValent to Vb, "Breakdown Voltage".
- Cp Device capacitance measured with zero volt bias 1 ms at 1MHz.

Vc - Maximum peak voltage across the varistor measured at 8/20us waveform and 1A pulse current

i<sub>max</sub> – Maximum peak current which may be applied with 8/20us waveform without device failure

W<sub>max</sub> – Maximum energy that may be dissipated with the 10/1000us waveform without device failure.

# General electrical specifications

## General technical data

Operating temperature	-40 +85℃
Storage temperature (on board)	-40… +85℃
Response time	<1 ns
Solderability	245±5℃, 5+0/ -0.5sec
Solder leach resistance	260±5°C,10 ±1sec

#### **Environmental Specifications**

Characteristics	Specifications	Test condition		
Bias humidity	$\Delta V_V / V_V \leq \pm 10\%$	90%RH, 40 $^\circ$ C, Working voltage, 1000 hours		
Thermal shock	$\Delta V_V/V_V \leq \pm 10\%$	-40 $^\circ\!$ C to 85 $^\circ\!$ C, 30 min. Cycle, 5 cycles		
Full load	$\Delta V_V / V_V \leq \pm 10\%$	Working voltage 85°C 1000 hours		
voltage	$\Delta \mathbf{v} \mathbf{v} / \mathbf{v} \mathbf{v} \geq \pm 10\%$	Working voltage, $85^{\circ}$ C, 1000 hours		

#### Storage Condition with package


Storage Temperature: 5 to 40°C

Relative Humidity: to 65%

Storage Time: 12 months max

# **Taping Package and Label Marking**

#### **Carrier tape dimensions**

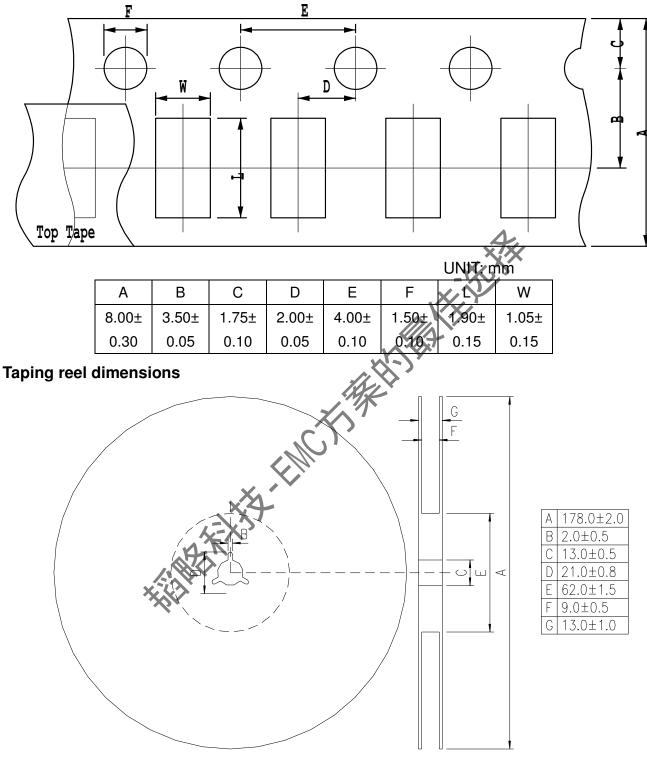

#### Taping specifications

There shall be the portion having no product in both the head and the end of taping, and there shall be the cover tape in the head of taping.

#### Quantity of products in the taping package


- (1) Standard quantity: 4000pcs/Reel for MLVS 0603 Lead Free series
- (2) Shipping quantity is a multiple of standard quantity.

# **Precautions for Handling**

# Solder cream in reflow soldering

Refer to the recommendable land pattern as printing mask pattern for solder cream.

- (1) Print solder in a thickness of 150 to 200  $\mu m.$
- (2) Dimensions: millimeters (inches)

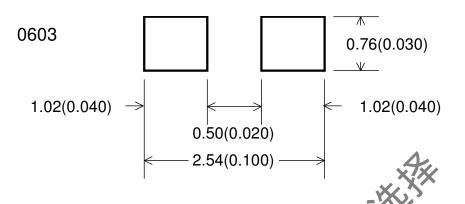

# Precaution for handling of substrate

Do not exceed to bend the board after soldering this product extremely.

- (Reference examples)
- Mounting place must be as far as possible from the position, which is close to the break line of board, or on the line of large holes of board.
- Do not bend extremely the board, in mounting another component. If necessary, use back-up pin (support pin) to prevent from bending extremely.
- Do not break the board by hand. We recommend using the machine or the jig to break it.


# Precaution for soldering

Note that rapid heating tapid cooling or local heating will easily damage this product.

Do not give heat shock over 100°C in the process of soldering. We recommend taking preheating and gradual cooling.

#### **Recommendable reflow soldering**

\*According to J-STD-020C

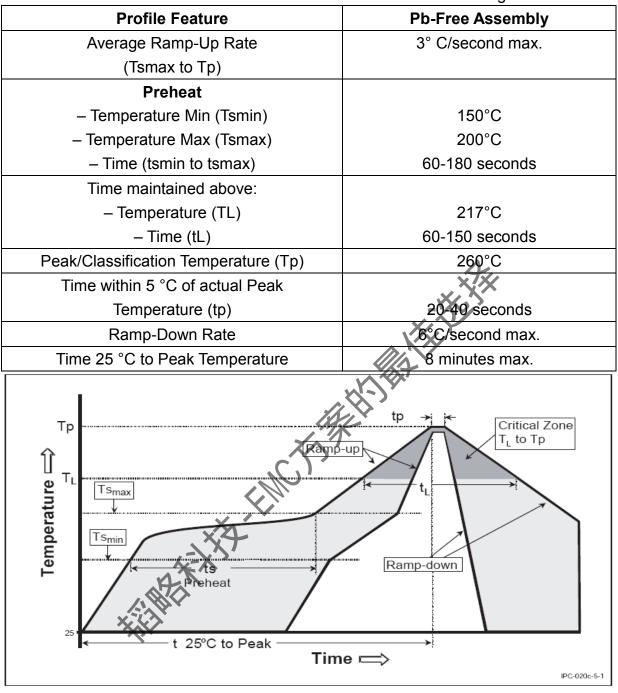

#### Soldering gun procedure

Note the follows, in case of using solder gun for replacement.

- (1) The tip temperature must be less than 350°C for the period within 3 seconds by using soldering gun less than 30W.
- (2) The soldering gun tip shall not touch this product directly.

#### Soldering volume

Note that excess of soldering volume will easily get crack the body of this product.

### **Contant Information**

#### SHENZHEN TOP-FLIGHT TECHNOLOGY CO., LTD

4th Floor, C Building, Quansen Industrial Park , Bulong Road, Longhua New District, Shenzhen Tel: 86-755-82908191 Fax: 86-755-82908701 Email:kang@topleve.com Website: http://www.topleve.com