

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA9T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA9T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀普通亮锡

Contact: Brass, Ordinary Tin Plated OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V/分钟.

Withstanding Voltage: AC 500V/Minute.

温度范围: -40° C to +105° C

Temperature Range: -40° C to +105° C

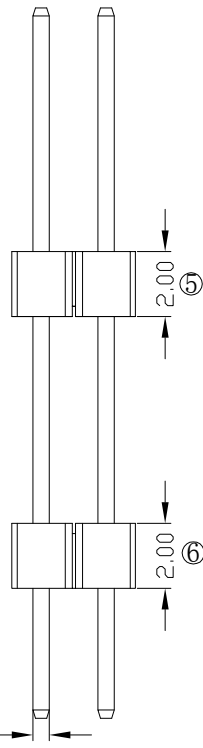

Ordering Information

P220-22 02 S1 C S 215 A 1

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Contact Full of Gold	Plating Semi-gold	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
10: 1.0mm	2-40P	A0=0.8u"	B0=0.8U'	B: PA6T		A: PE Bag
15: 1.5mm		A1=1u"	B1=1U'	C: PA9T		B: Tape & Reel
20: 2.0mm		A2=1.5u"	B2=1.5U'	D: LCP		C: Tube
		A3=2u"	B3=2U'			D: Tube+CAP
		A4=3u"	B4=3U'			E: Tray
		A5=5u"	B5=5U'			
		A6=10u"	B6=10U'			
		A7=15u"	B7=15U'			
		A8=20u"	B8=20U'			
		A9=30u"	B9=30U'			
		S1=Ordinary Tin Plated				
		S2=Matte Tin Plated				
		S3=Tin-plated High-temperature				

RoHS
COMPLIANT

客编:

1. 带*为品质重点检验尺寸

注意事项

OPERATION

SCALE

Fit

Yxcon

东莞市宇熙精密连接器有限公司

X.X +0.25

UNIT

MM

www.yxcon.com

Dongguan Yuxi Electronic Co., Ltd.

X.XX +0.20

SIZE

A4

DESIGN

李官森 2021.08.19

PART NO

P220-2202S1CS215A1

X.XXX +0.10

SHEET

1/1

CHECK

TITLE

2.0排针 2*2P*2 L=21.5/4.0/7.5 180度 PA9T

Angle +13°

PRQJ.

APPROVE

Customer No.

镀普通亮锡 两塑凹面朝内 袋装

DIM TOL

MODIFICATION DESCRIPTION

A0 2021.08.19 / 新版发行

REV DATE SYMBOL