

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA9T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA9T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀高温亮锡

Contact: Brass, BRIGHT TIN-PLATED HIGH-TEMPERATURE OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V/分钟.

Withstanding Voltage: AC 500V/Minute.





温度范围: -40° C to +105° C

Temperture Range: -40° C to +105° C

Ordering Information

P110-11 04 S3 C S 065 A 1

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Contact Plating Full Cf Gbl d	Serial-gold	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
15: 1.5mm	1-40P	A0=0.8u"	B0=0.8U"	A: PBT	TERMINAL	A: PE Bag
17: 1.7mm		A1=1u"	B1=1U"	B: PA6T		C Tube
20: 2.0mm		A2=1.5u"	B2=1.5U"	C: PA9T		D Tube+CAP
25: 2.54mm		A3=2u"	B3=2U"	D: LCP		E: Tray
		A4=3u"	B4=3U"			
		A5=5u"	B5=5U"			
		A6=10u"	B6=10U"			
		A7=15u"	B7=15U"			
		A8=20u"	B8=20U"			
		A9=30u"	B9=30U"			
		S1=Quinary Tin Plated				
		S2=Matte Tin Plated				
		S3=Tin-plated High-temperature				

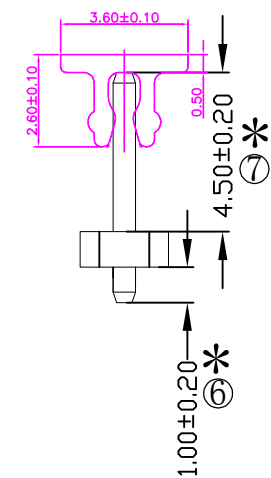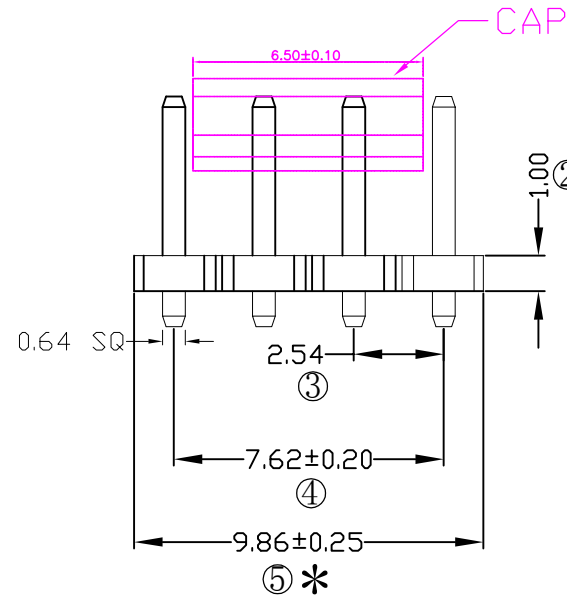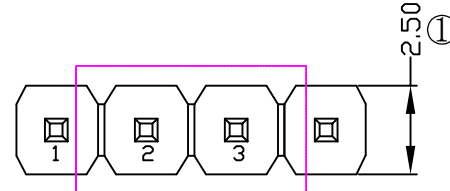

RoHS COMPLIANT

注意事项
1. 带*为品质重点检验尺寸

			OPERATION	SCALE	Fit	Yxcon 东莞市宇熙精密连接器有限公司		
			X.X ±0.25	UNIT	MM	www.yxcon.com Dongguan Yuxi Electronic Co.,Ltd.		
			X.XX ±0.20	SIZE	A4	DESIGN	PART NO	P110-1104S3CS065B1
A0	2021.09.24	/	X.XXX ±0.10	SHEET	1/1	CHECK	TI TLE:	PH2.54*1.0 1*4P L=6.5/1.0 180度 塑高=1.0
REV	DATE	SYMBOL	Angle ±3°	PROJ.	APPROVE		Customer No.	PA9T 镀高温亮锡 CAP+700卷
			DIM TOL					