


Specifications

Ordering Information

P220-22 20 A0 C M 168 B 1




备注 (Remark)
 1. 材料 (MATERIAL)
 胶芯: PA9T+30%G.F UL94V-0, 颜色: 黑色.
 Housing: PA9T+30%G.F UL94V-0, Color: Black
 四方针: 黄铜, 镍底30u"MIN, 表面镀普金
 Contact: Brass, GOLD PLATING OVER ALL
 30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):
 额定电流: 2 AMP
 Rating Current: 2 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V/分钟.
 Withstanding Voltage: AC 500V/Minute.
 温度范围: -40° C to +105° C
 Temperature Range: -40° C to +105° C



HEIGHT OF HOUSING	NO. OF PINS PER ROW	Full Contact	Contact Plating	INSULATOR MATERIAL	LENGTH OF TERMINAL	PACKING
10: 1.0mm	2~40P	A0=0.8u"	Gold	B: PA6T	TERMINAL	A: PE Bag
15: 1.5mm		A1=1u"	Semi-gold	C: PA9T		B: Tape & Reel
20: 2.0mm		A2=1.5u"		D: LCP		C: Tube
		A3=2u"				D: Tube+CAP
		A4=3u"				E: Tray
		A5=5u"				
		A6=10u"				
		A7=15u"				
		A8=20u"				
		A9=30u"				

S1=Ordinary Tin Plated
 S2=Matte Tin Plated
 S3=Tin-plated High-temperature

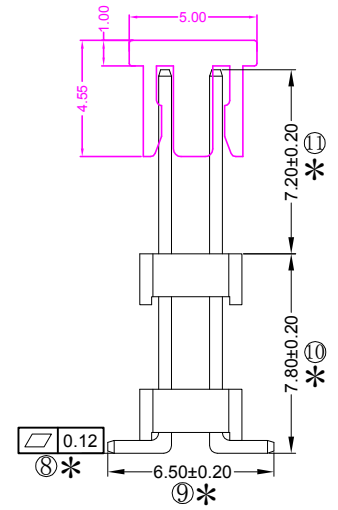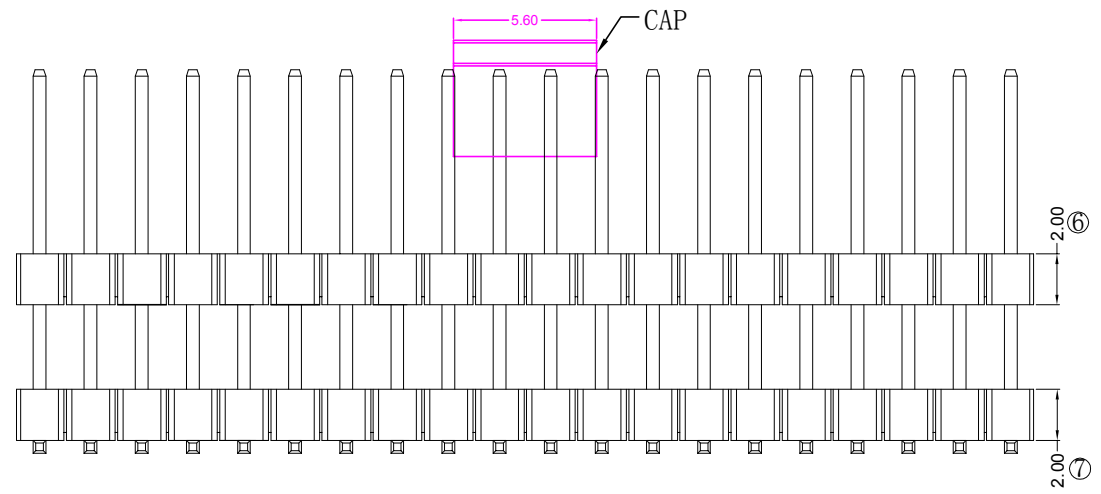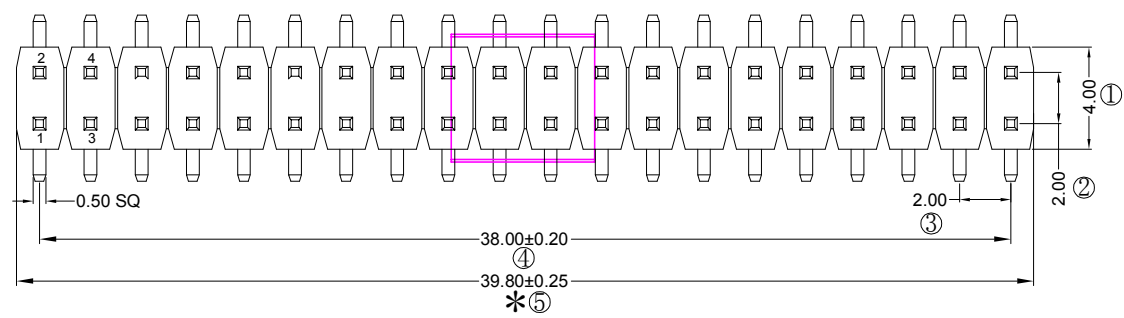

RoHS COMPLIANT

客编:
 1. 带*为品质重点检验尺寸

注意事项

			OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co., Ltd.		
			X.X	±0.25	UNIT		MM				
			X.XX	±0.20	SIZE	A4	DESIGN	李官森2022.02.15	PART NO.		P220-2220A0CM168B1
			X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:		2.0排针 2*20P*2 L=16.8/6.5(0)/7.2 SMT PA9T 镀普金 CAP+150/卷
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION			PROJ.	APPROVE	Customer No.			