

LCD&LCM SPECIFICATION

液晶显示屏产品使用说明书

MODULE NO.

T12864M5135A

128x64 图形点阵
COG+PCB 工艺, SPI 串口

Designed	Checked	Approved

深圳市乾思迪电子科技有限公司

SHENZHEN TRUSTY ELECTRONIC TECHNOLOGY CO.,LTD

申 明

本产品属我司公模产品，我司保留对此文件及产品进行修改升级的权利且不另行通知，请于向我公司提出订单前，自行确定所使用的相关技术文件及产品规格为最新版本。规格书中之相关内容相信是正确的，但并不保证绝无错误，欢迎提出宝贵建议以便更加完善资料。

若因贵公司使用我公司的文件或产品，而涉及到第三方之专利或版权等相关产权的应用时，则由贵公司负责取得相关授权，我公司不承担由此引起的相关责任。


Revision history 修改记录

revision	date	description	remark
A00	2022-11-25	First release	

Content/目录

1. Outline Dimension 外形尺寸图.....	4
2. Mechanical specifications/尺寸说明.....	5
3. Feature/显示特性.....	5
4. Pin description/通讯接口引脚描述.....	5
5. Block diagram & power supply/电路原理图.....	6
6. Absolute maximum rating/限定参数.....	6
7. Electrical characteristics/电气特性.....	7
8. Backlight characteristics/背光特性.....	8
9. Electrical-optical characteristics/光学特性.....	8
10. Control and display commands/指令描述.....	9
11. DDRAM 映射表.....	10
12. Inspection standards/检验标准.....	11
13. Handling precautions/注意事项.....	12

1. Outline Dimension 外形尺寸图

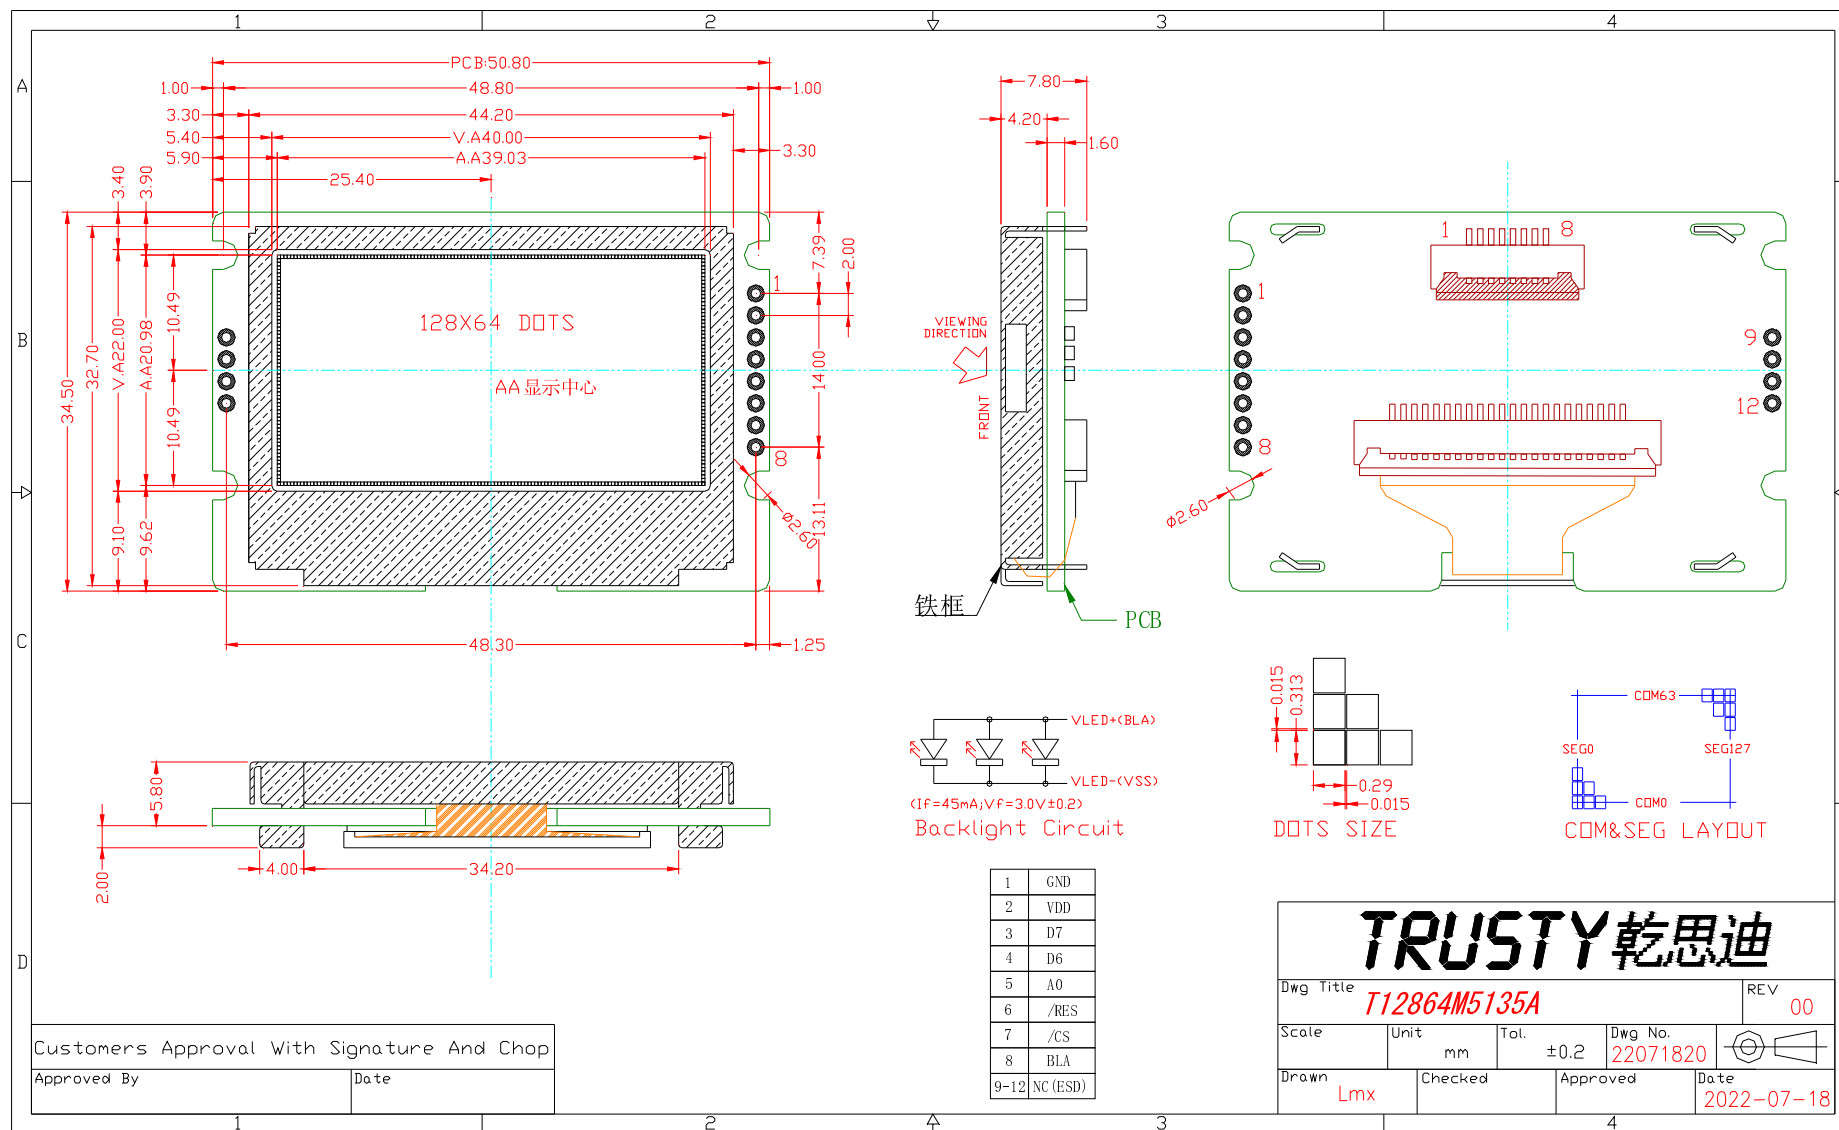

2. Mechanical Specifications/尺寸说明

Dimensional outline (W*H*T)/外形尺寸	: 50.8mm*34.5mm*7.8mm
Viewing area (W*H)/视域尺寸	: 40.0mm*22.0mm
Dot pitch (W*H)/点距	: 0.305mm*0.328mm
Dot size (W*H)/点大小	: 0.29mm*0.313mm
Weigh/重量 t	: Approx


3.Feature/显示特性

Display resolution/点阵数	: 128(w)*64(h)
Display mode/显示模式	: FSTN ,Positive, Transmissive
Driving method/驱动方式	: 1/64 Duty , 1/9 Bias
Viewing direction/视角	: 12:00 o'clock
Backlight/背光	: LED , White(or Other)
Built-in controller/控制器	: ST7565R(or Other)
Operation temp/工作温度	: -20℃~70℃
Storage temp/储存温度	: -30℃~80℃

4. Pin description/通讯接口引脚描述

Pin No.	Pin Name	Function
1	VSS	GND 0V 地
2	VDD	Power Supply. (3.3V) 电源
3	SDA	(SI)Serial data write and read input/output pin. 数据
4	SCLK	(SCL)Serial pixel clock signal input pin. 时钟
5	A0	Register select input, H: data; L: command 选择指令或数据
6	RES	Reset signal (Low effective) 复位
7	/CS	Chip select input pin. 片选
8	BLA	Backlight Positive Power (3.3V) 背光电源正极3.3V
9-12	NC(ESD)	ESD-GND 静电放电引脚

5. Block Diagram & Power supply/电路原理图

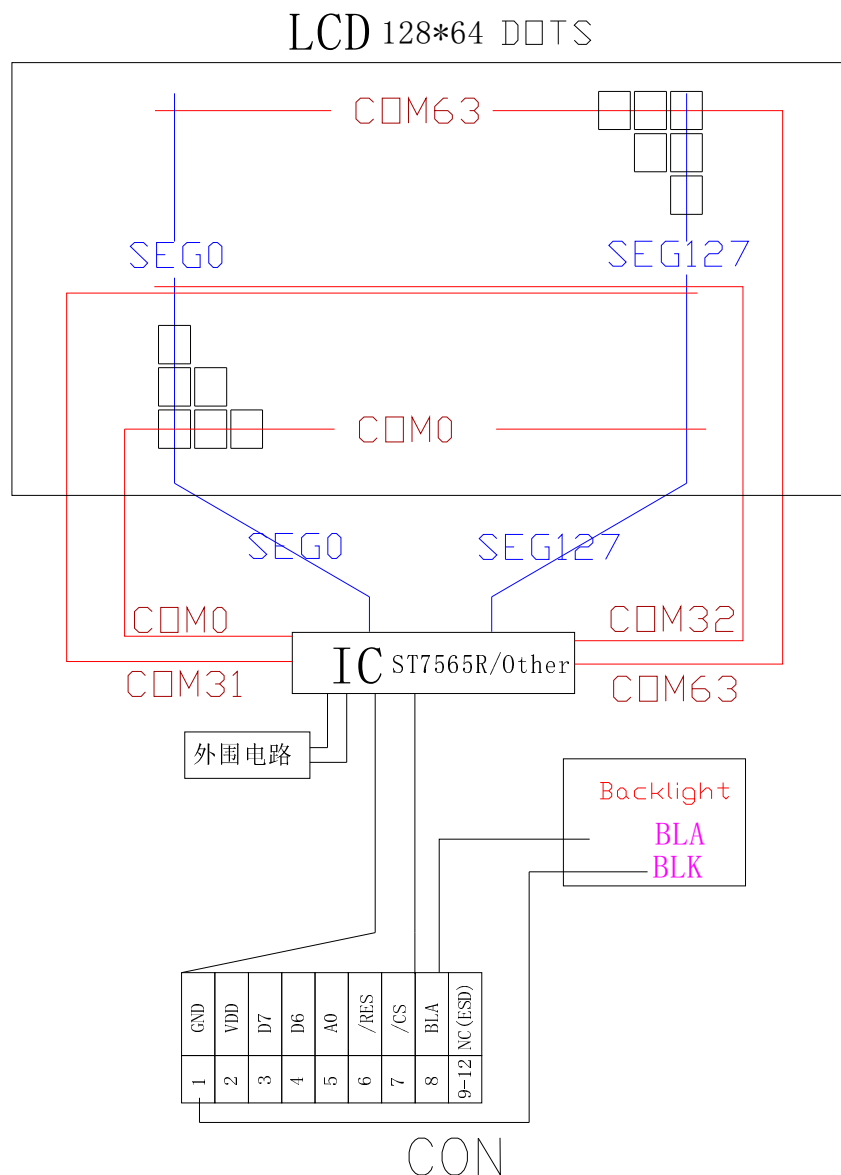

6. Absolute Maximum Ratings/限定参数

Items	Symbol	MIN.	MAX.	Unit	Condition
Supply Voltage/供电电压	V _{DD}	-0.3	+3.3	V	V _{SS} = 0V
	V _{lcd}	-0.3	+8.7	V	V _{SS} = 0V
Input Voltage/输入电压	V _{IN}	-0.3	V _{DD} +0.3	V	V _{SS} = 0V
LED forward current/背光电流	I _f	0	45	mA	---
Operating Temp./工作温度	T _{OP}	-20	+70	°C	---
Storage Temp./储存温度	T _{st}	-30	+80	°C	---

7. Electrical Characteristics/电气特性

7.1 Typical Electrical Characteristics

(V_{SS} = 0V, V_{DD} = 3.3V ± 10%, Top = 25°C)


Items	Symbol	MIN.	TYP.	MAX.	Unit	Condition Pin
Operating Voltage/工作电压	V _{DD}	2.7	3.0	3.3	V	V _{DD}
LCD Operating Voltage	V _{op}	-	9.0	-	V	V ₀
Input High Voltage/输入高电压	V _{IH}	0.8 V _{DD}	-	V _{DD}	V	AO, W/R, RD, D0~D7
Input Low Voltage 输入低电压	V _{IL}	0	-	0.4 V _{DD}	V	
Output High Voltage 输出高电压	V _{OH}	0.7	-	V _{DD}	V	D0~D7
Output Low Voltage 输出低电压	V _{OL}	0	-	0.2	V	D0~D7
Supply Current/供电电流	I _{DD}	---	0.6	8	mA	V _{DD} , V _{SS}

Note 1: There is tolerance in optimum LCD driving voltage during production and it will be within the specified range.

7.2 Timing Specifications

7.2.1.

The 4-line SPI Interface

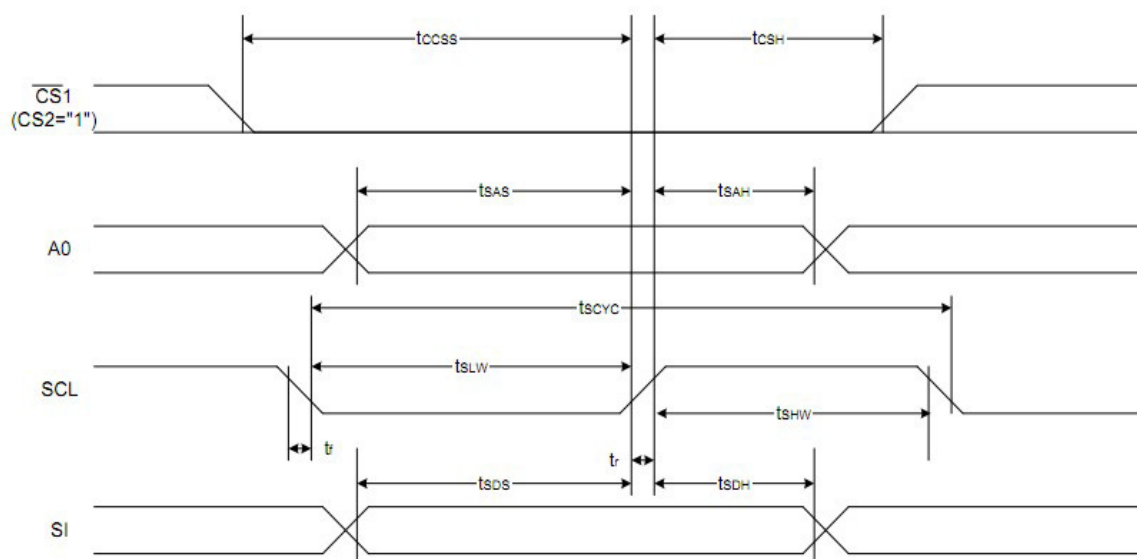

7.2.2 Reset timing (复位)

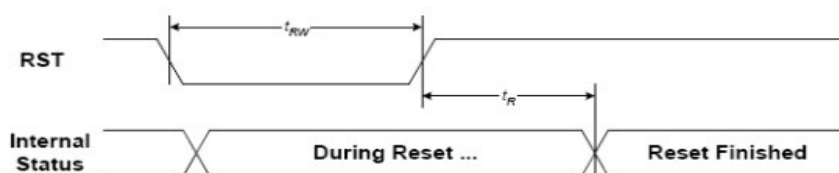


FIGURE 15: Reset Characteristics

(1.65V ≤ V_{DD} < 3.3V, Ta = -30 to +85°C)

Symbol	Signal	Description	Condition	Min.	Max.	Units
t _{RW}	RST	Reset low pulse width		3	—	μS
t _R	RST,, Internal Status	Reset to Internal Status pulse delay		6	—	mS


8. Backlight Characteristics/背光特性

Items	Symbol	MIN.	TYP.	MAX.	Unit	Condition
Forward Voltage/电压	Vf	2.8	3.0	3.1	V	If=30mA
Reverse current/电流	Ir	---	20	30	mA	Vr=3V
Peak wave length/波长	λ	---	---	---	nM	If=25mA
Luminance/亮度	Lv	---	---	---	Cd/m ²	If=25mA
Color /颜色	White (白色, 或者其他色)					


9. Electrical-Optical Characteristics/光学特性

Items	Symbol	Condition	MIN.	TYP.	MAX.	Unit	NOTE
Response time/反应时间	Tr	Ta= 25°C	---	185	---	ms	2
	Tf		---	200	---		
Contrast ratio/对比度	Cr	Ta= 25°C	---	--	---		3
Viewing angle range/视角范围	θ	Cr $\geq$ 2	-40	---	40	degree	


Note 1. Definition of response time

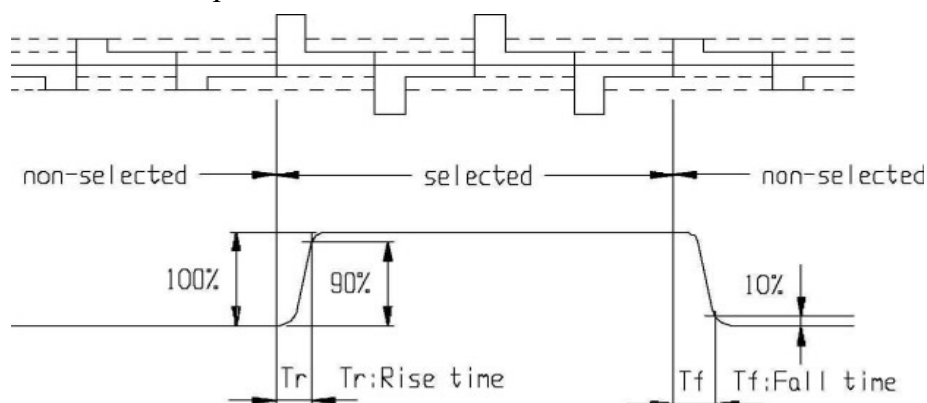

Note2 . Definition of Contrast Ratio 'Cr'

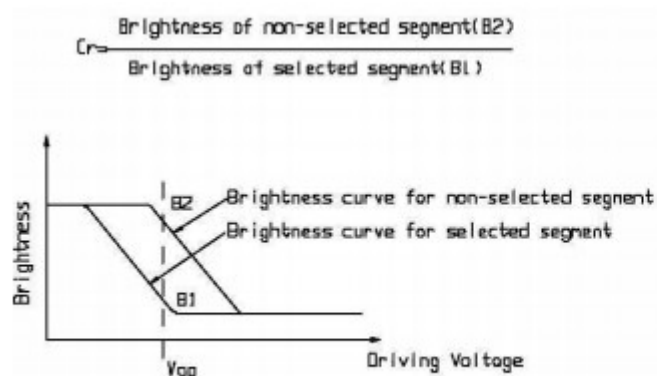

Note 3. Definition of Viewing Angle Range 'θ'

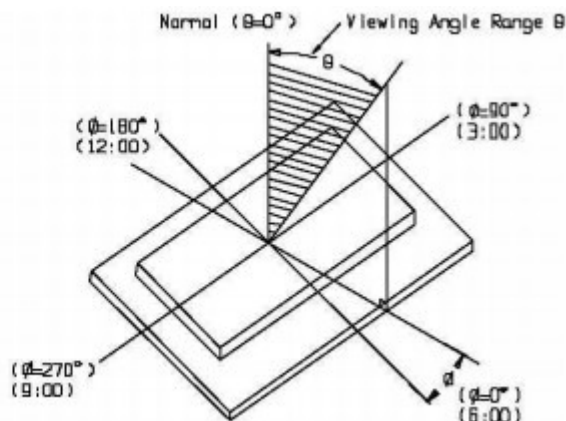

10. Control and display commands/指令描述

The following is a list of host commands supported by UC1705x

C/D: 0: Control, 1: Data
W/R: 0: Write Cycle, 1: Read Cycle
Useful Data bits – Don't Care

	Command	C/D	W/R	D7	D6	D5	D4	D3	D2	D1	D0	Action	Default
1.	Write Data Byte	1	0	#	#	#	#	#	#	#	#	Write 1 byte	N/A
2.	Read Data Byte	1	1	#	#	#	#	#	#	#	#	Read 1 byte	N/A
3.	Get Status	0	1	BZ	MX	DE	RST	0	0	0	0	Get Status	--
4.	Set Column Address LSB	0	0	0	0	0	0	#	#	#	#	Set CA [3:0]	0
	Set Column Address MSB			0	0	0	1	#	#	#	#	Set CA [7:4]	0
5.	Set Power Control	0	0	0	0	1	0	1	#	#	#	Set PC[2:0]	000b
6.	Set Scroll Line	0	0	0	1	#	#	#	#	#	#	Set SL[5:0]	0
7.	Set Page Address	0	0	1	0	1	1	#	#	#	#	Set PA[3:0]	0
8.	Set V _{LCD} Resistor Ratio	0	0	0	0	1	0	0	#	#	#	Set PC[5:3]	100b
9.	Set Electronic Volume (double-byte command)	0	0	1	0	0	0	0	0	0	1	Set PM[5:0]	20H
				0	0	#	#	#	#	#	#		
10.	Set All-Pixel-ON	0	0	1	0	1	0	0	1	0	#	Set DC[1]	0b
11.	Set Inverse Display	0	0	1	0	1	0	0	1	1	#	Set DC[0]	0b
12.	Set Display Enable	0	0	1	0	1	0	1	1	1	#	Set DC[2]	0b
13.	Set SEG Direction	0	0	1	0	1	0	0	0	0	#	Set LC[0]	0b
14.	Set COM Direction	0	0	1	1	0	0	#	-	-	-	Set LC[1]	0b
15.	System Reset	0	0	1	1	1	0	0	0	1	0	Software Reset	N/A
16.	NOP	0	0	1	1	1	0	0	0	1	1	No operation	N/A
17.	Set LCD Bias Ratio	0	0	1	0	1	0	0	0	1	#	Set BR	0b
18.	Set Cursor Update Mode	0	0	1	1	1	0	0	0	0	0	AC3=1, CR=CA	N/A
19.	Reset Cursor Update Mode	0	0	1	1	1	0	1	1	1	0	AC3=0, CA=CR.	N/A
20.	Set Static Indicator OFF	0	0	1	0	1	0	1	1	0	0	NOP	N/A
21.	Set Static Indicator ON	0	0	1	0	1	0	1	1	0	1	NOP	N/A
	Set Static Indicator			-	-	-	-	-	-	-	-		
22.	Set Booster Ratio (double-byte command)	0	0	1	1	1	1	1	0	0	0	NOP	00b
				0	0	0	0	0	0	#	#		
23.	Set Power Save (compound command)	0	0	#	#	#	#	#	#	#	#	Display OFF & All Pixel ON	N/A
24.	Set Test Control (double-byte command)	0	0	1	1	1	1	1	1	TT		For UCI only Do NOT use	N/A
				-	#	#	#	#	#	#	#		
25.	Set Adv. Program Control 0 (double-byte command)	0	0	1	1	1	1	1	0	1	0	Set TC, WA[1:0]	90H
				#	0	0	1	0	0	#	#		
26.	Set Adv. Program Control 1 (double-byte command)	0	0	1	1	1	1	1	0	1	1	For UCI only Set APC1	N/A
				#	#	#	#	#	#	#	#		

* Other than commands listed above, all other bit patterns result in NOP (No Operation).

11. DDRAM 映射表

PA[3:0]	0	Line AddCes									Panel Location	MY=0		MY=1				
											SL=0	SL=16	SL=0	SL=0	SL=25	SL=25		
0000	D0	00H	0	1						Page 0								
	D1	01H	0	1														
	D2	02H	0	0														
	D3	03H	0	0														
	D4	04H	0	1														
	D5	05H	1	1														
	D6	06H	1	0														
	D7	07H	1	0														
0001	D0	08H								Page 1								
	D1	09H																
	D2	0AH																
	D3	0BH																
	D4	0CH																
	D5	0DH																
	D6	0EH																
	D7	0FH																
0010	D0	10H								Page 2								
	D1	11H																
	D2	12H																
	D3	13H																
	D4	14H																
	D5	15H																
	D6	16H																
	D7	17H																
0011	D0	18H								Page 3								
	D1	19H																
	D2	1AH																
	D3	1BH																
	D4	1CH																
	D5	1DH																
	D6	1EH																
	D7	1FH																
0100	D0	20H								Page 4								
	D1	21H																
	D2	22H																
	D3	23H																
	D4	24H																
	D5	25H																
	D6	26H																
	D7	27H																
0101	D0	28H								Page 5								
	D1	29H																
	D2	2AH																
	D3	2BH																
	D4	2CH																
	D5	2DH																
	D6	2EH																
	D7	2FH																
0110	D0	30H								Page 6								
	D1	31H																
	D2	32H																
	D3	33H																
	D4	34H																
	D5	35H																
	D6	36H																
	D7	37H																
0111	D0	38H								Page 7								
	D1	39H																
	D2	3AH																
	D3	3BH																
	D4	3CH																
	D5	3DH																
	D6	3EH																
	D7	3FH																
1000	D0	40H								Page 8								


SEG1	SEG2	SEG3	SEG4	SEG5	SEG6	SEG7	SEG8	SEG128	SEG129	SEG130	SEG131	SEG132
SEG132	SEG131	SEG130	SEG129	SEG128	SEG127	SEG126	SEG125	SEG6	SEG1	SEG3	SEG2	SEG1

85	49	65	49
MUX			

Example for memory mapping: let $MX = 0$, $MY = 0$, $SL = 0$, according to the data shown in the above table:

- Page 0 SEG 1 (D7-D0) : 11100000b
- Page 0 SEG 2 (D7-D0) : 00110011b

12. Inspection Standards/检验标准

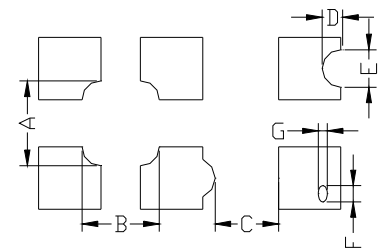Item	Criterion for defects	Defect type
1) Display on inspection/显示效果	(1) Non display (2) Vertical line is deficient (3) Horizontal line is deficient (4) Cross line is deficient	Major
2) Black / White spot/黑点或白点	Size Φ (mm) Acceptable number $\Phi \leq 0.3$ Ignore (note) $0.3 < \Phi \leq 0.45$ 3 $0.45 < \Phi \leq 0.6$ 1 $0.6 < \Phi$ 0	Minor
3) Black / White line/黑线或白线	Length (mm) Width (mm) Acceptable number $L \leq 10$ $W \leq 0.03$ Ignore $5.0 \leq L \leq 10$ $0.03 < W \leq 0.04$ 3 $5.0 \leq L \leq 10$ $0.04 < W \leq 0.05$ 2 $1.0 \leq L \leq 10$ $0.05 < W \leq 0.06$ 2 $1.0 \leq L \leq 10$ $0.06 < W \leq 0.08$ 1 $L \leq 10$ $0.08 < W$ follows 2) point defect Defects separate with each other at an interval of more than 20mm	Minor
4) Display pattern/显示模式	 $\frac{A+B}{2} \leq 0.28$ $0 < C$ $\frac{D+E}{2} \leq 0.25$ $\frac{F+G}{2} \leq 0.25$ Note: 1) Up to 3 damages acceptable 2) Not allowed if there are two or more pinholes every three-fourth inch.	Minor
5) Spot-like contrast irregularity/均匀度	Size Φ (mm) Acceptable Number $\Phi \leq 0.7$ Ignore (note) $0.7 < \Phi \leq 1.0$ 3 $1.0 < \Phi \leq 1.5$ 1 $1.5 < \Phi$ 0 Note: 1) Conformed to limit samples. 2) Intervals of defects are more than 30mm.	Minor
6) Bubbles in polarizer/玻璃内有气泡	Size Φ (mm) Acceptable Number $\Phi \leq 0.4$ Ignore (note) $0.4 < \Phi \leq 0.65$ 2 $0.65 < \Phi \leq 1.2$ 1 $1.2 < \Phi$ 0	Minor
7) Scratches and dent on the polarizer/玻璃刮痕/凹痕	Scratches and dent on the polarizer shall be in the accordance with "2) Black/white spot", and "3) Black/White line".	Minor
8) Stains on the surface of LCD panel/玻璃上有污点	Stains which cannot be removed even when wiped lightly with a soft cloth or similar cleaning.	Minor
9) Rainbow color/杂色	No rainbow color is allowed in the optimum contrast on state within the active area.	Minor
10) Viewing-area encroachment/玻璃边线出现在视域	Polarizer edge or line is visible in the opening viewing area due to polarizer shortness or sealing line.	Minor
11) Bezel appearance/铁筐外观	Rust and deep damages that are visible in the bezel are rejected.	Minor
12) Defect of land surface 表面缺陷	Evident crevices that are visible are rejected.	Minor
13) Parts mounting/部件安装	(1) Failure to mount parts (2) Parts not in the specifications are mounted (3) For example: Polarity is reversed, HSC or TCP falls off.	Minor
14) Part alignment/部件结合度	(1) LSI, IC lead width is more than 50% beyond pad outline. (2) More than 50% of LSI, IC leads is off the pad outline.	Minor
15) Conductive foreign matter (solder ball, solder hips)/杂质 (焊接遗留物)	(1) $0.45 < \Phi$, $N \geq 1$ (2) $0.3 < \Phi \leq 0.45$, $N \geq 1$, Φ : Average diameter of solder ball (unit: mm) (3) $0.5 < L$, $N \geq 1$, L : Average length of solder chip (unit: mm)	Minor
16) Bezel flaw/铁筐缺陷	Bezel claw missing or not bent	Minor
17) Indication on name plate (sampling indication label)/标志	(1) Failure to stamp or label error, or not legible.(all acceptable if legible) (2) The separation is more than 1/3 for indication discoloration, in which the characters can be checked.	Minor

13. Handling precautions 注意事项

1. Refrain from strong mechanical shock and forces to the module. It may cause improper operating or damage to the module.
防止震动和压迫模组，以免造成模组损坏和运行正常。
2. The polarizer used on the display surface is easily scratched and damaged. Extreme care should be taken when handling. When cleaning the display surface, use soft cloth with a solvent recommended : ethyl alcohol , isopropyl or hexane) and wipe gently, do not use the following solvents : water, ketone or aromatics .
模组表面的偏光极易被刮伤和损坏，所以操作是要非常小心。请用蘸有乙醇等溶剂(无腐蚀性且挥发快)的湿软布轻轻擦拭，不要使用水，乙酮等溶剂。
3. Wipe off water or oil drop immediately If you leave drop for a long time, stain and discoloration may occur.
要立即擦拭掉屏幕上的油滴和水滴，否则会出现污点和杂质。
4. Do not touch pads or pins of interface directly with bare hands. When handling the LCD module, put on a soft glover like finger-glover.
不要直接用手去触碰接口处的金属管脚。当操作模组的时候，请配带软指套。
5. Protect the module from static electricity, it may cause damage to CMOS LSI.
模组需要有防静电保护，否则会损坏CMOS LSI。
6. To prevent LCD panels from degradation, do not operate or store them exposed directly to sunlight or high temperature/humidity.
不要直接在太阳,高温或潮湿环境下操作和储存LCD模组，以免影响模组的质量。
7. If the liquid crystal leaks from the panel it should be kept away from the eyes and mouths. In case of contact with skins, wash away thoroughly with soap and water.
若有液晶漏出，务必避免其入眼入口。若沾到皮肤上了，马上用肥皂和水冲洗干净。
8. Soldering should be only performed on the I/O terminals within the temperature of $280 \pm 20^{\circ}\text{C}$ and soldering time should be less than 4 seconds.
要在 $280 \pm 20^{\circ}\text{C}$ 的条件下在I/O终端实现焊接，并且保证焊接时间短于4秒。
9. Supply voltage within the specified voltage limit, the maximum rating, higher voltage cause the shorter LCD life or damaged.
绝对要在指定的电压范围内驱动模组， 因为如果在高于指定电压的情况下驱动模组， 会使模组寿命变短
10. Do not input any signals before power is turned on. Do not connect or disconnect the module on the state of Power-ON.
供电之前不要输入任何信号，不要在通电时连接和断开 LCD 模组。