


Description


The L7912CV-DG-CN three-terminal negative regulators is available in TO-220 packages and several fixed output voltages, making it useful in a wide range of applications. These regulators can provide local on-card regulation, eliminating the distribution problems associated with single point regulation; furthermore, they are particularly suited for split power supplies. If adequate heat sinking is provided, they can deliver over 1.5 A output current. Although designed primarily as fixed voltage regulators, these devices can be used with external components to obtain adjustable voltages and currents.

Features

- Output Current up to 1.5A
- Output Voltages of -12V
- Thermal Overload Protection
- Short Circuit Protection
- Output transition SOA protection

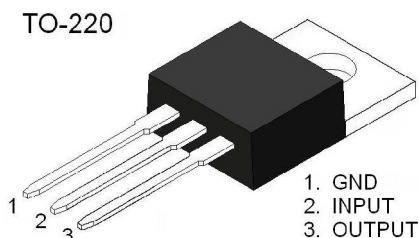

Schematic diagram

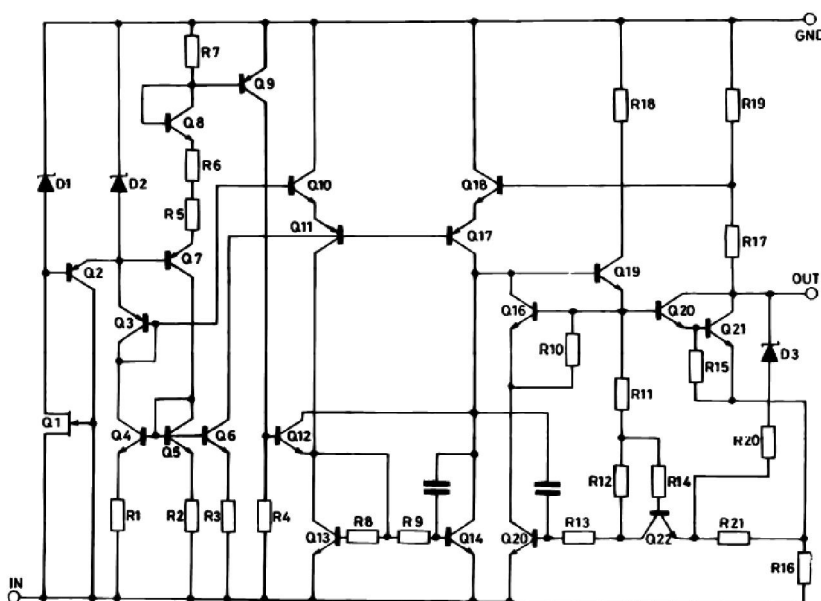

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Input Voltage	V_{IN}	-35	V
Output current	I_O	-1.5	A
Operating Junction Temperature Range	T_{OPR}	0 ~ 125	°C
Storage Temperature Range	T_{STG}	-55 ~ + 150	°C

Note: Absolute maximum ratings are those values beyond which damage to the device may occur. Functional operation under these condition is not implied.

Thermal Resistances (Ta = 25°C)

Parameter	Symbol	Value	Unit
Thermal Resistance Junction-Case	$R_{\theta JC}$	5	°C/W
Thermal Resistance Junction-Air	$R_{\theta JA}$	65	°C/W

Electrical Characteristics

Refer to the test circuits , $I_O = -750\text{mA}$, $V_I = -19\text{V}$, $C_I = 2.2\mu\text{F}$, $C_O = 1\mu\text{F}$ unless otherwise specified

Parameter	Symbol	Conditions	Value			Unit
			Min	Typ	Max	
Output Voltage	V_O	$T_J = 25^\circ\text{C}$	-11.52	-12	-12.48	V
		$I_O = -5\text{mA} \sim -1.5\text{A}$, $P_O \leq 15\text{W}$ $V_I = -14.5 \sim -27\text{V}$	-11.40	-12	-12.60	
Line Regulation(Note)	ΔV_O	$T_J = 25^\circ\text{C}$			240	mV
					120	
Load Regulation(Note)	ΔV_O	$T_J = 25^\circ\text{C}$			240	mV
					120	
Quiescent Current	I_Q	$T_J = 25^\circ\text{C}$			8.0	mA
Quiescent Current Change	ΔI_Q	$I_O = -5\text{mA} \sim -1.5\text{A}$			0.5	mA
		$I_O = -14.5\text{V} \sim -30\text{V}$			1.0	
Output Voltage Drift	$\Delta V / \Delta T$	$I_O = 5\text{mA}$		-0.8		mV/°C
Output Noise Voltage	V_N	$f = 10\text{Hz} \sim 100\text{KHz}$, $T_J = 25^\circ\text{C}$		200		μV
Ripple Rejection	RR	$f = 120\text{Hz}$, $\Delta V_I = 10\text{V}$		60		dB
Dropout Voltage	V_D	$I_O = 1.5\text{A}$, $T_J = 25^\circ\text{C}$		2		V
Short Circuit Current	I_{SC}	$V_I = -35\text{V}$, $T_J = 25^\circ\text{C}$		300		mA
Peak Current	I_{PK}	$T_J = 25^\circ\text{C}$		2.2		A

Notes: Load and line regulation are specified at constant junction temperature. Changes in V_O due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

Application information


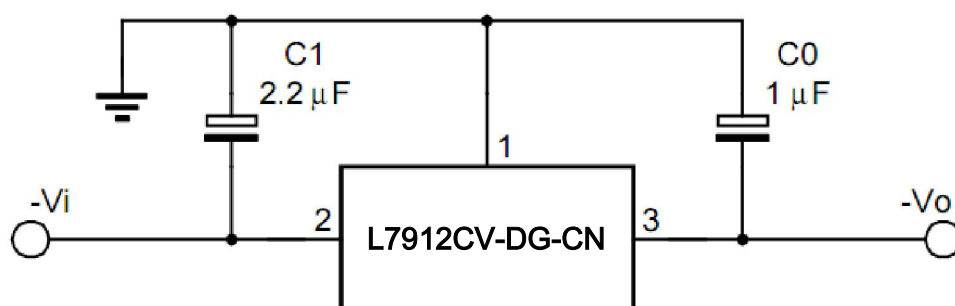


Figure 1.Fixed Output regulator


1. Required for stability. For value given, capacitor must be solid tantalum. If aluminium electrolytic are used, at least ten times value should be selected. C1 is required if regulator is located an appreciable distance from power supply filter.
- 2.To improve transient response. If large capacitors are used, a high current diode from input to output should be introduced to protect the device from momentary input short circuit.

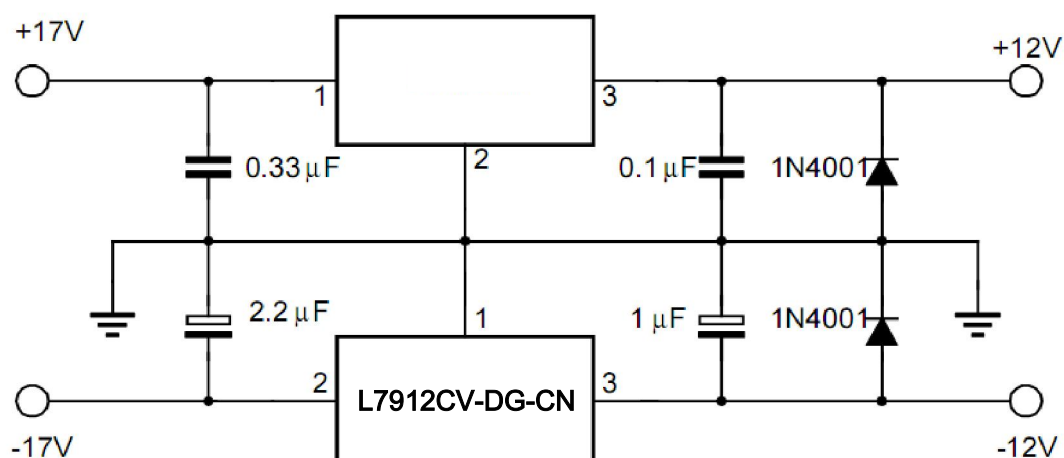

(*) Against potential latch-up problems.

Figure 2.Split power supply ($\pm 12\text{ V}$, -1.5 A)

Package Dimensions

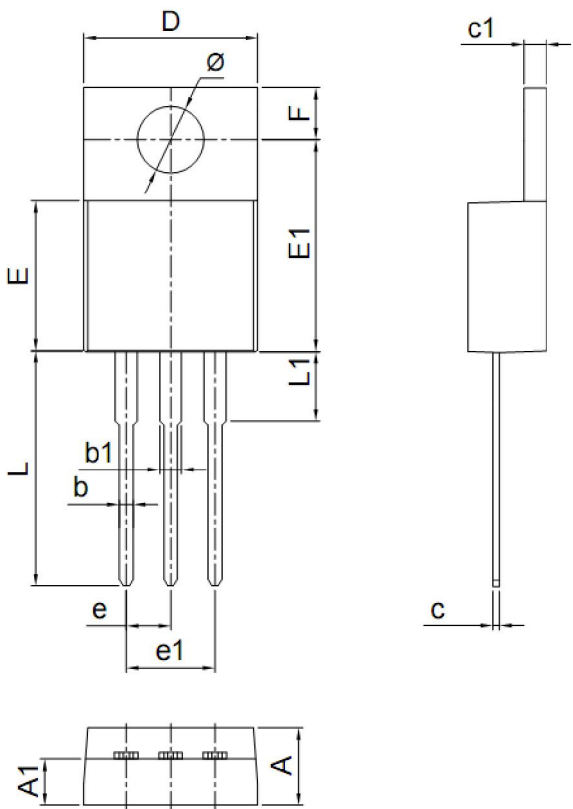TO-220	Symbol	Millimeter		Inches	
		Min.	Max.	Min.	Max.
	A	4.30	4.70	0.169	0.185
	A1	0.00	0.15	0.000	0.006
	b	0.71	0.91	0.028	0.036
	b1	1.17	1.37	0.046	0.054
	c	0.30	0.50	0.012	0.020
	c1	1.17	1.37	0.046	0.054
	D	9.90	10.20	0.390	0.402
	E	8.50	8.90	0.335	0.350
	E1	12.00	12.50	0.472	0.492
	e	2.44	2.64	0.096	0.104
	e1	4.88	5.28	0.192	0.208
	F	2.60	2.80	0.102	0.110
	L	13.20	13.80	0.520	0.543
	L1	3.80	4.20	0.150	0.165
	Φ	3.60	3.96	0.142	0.156

NOTICE

The information presented in this document is for reference only. Involving product optimization and productivity improvement, ChipNobo reserves the right to adjust product indicators and upgrade some technical parameters. ChipNobo is entitled to be exempted from liability for any delay or non-delivery of the information disclosure process that occurs.

本文件中提供的信息仅供参考。涉及产品优化和生产效率改善，ChipNobo 有权调整产品指标和部分技术参数的升级，所出现信息披露过程存在延后或者不能送达的情形，ChipNobo 有获免责权。

The product listed herein is designed to be used with residential and commercial equipment, and do not support sensitive items and specialized equipment in areas where sanctions do exist. ChipNobo Co., Ltd or anyone on its behalf, assumes no responsibility or liability for any damages resulting from improper use.

此处列出的产品旨在民用和商业设备上使用，不支持确有制裁地区的敏感项目和特殊设备，ChipNobo 有限公司或其代表，对因不当使用而造成的任何损害不承担任何责任。

For additional information, please visit our website <http://www.chipnobo.com>, or consult your nearest Chipnobo sales office for further assistance.

欲了解更多信息，请访问我们的网站 <http://www.chipnobo.com>，或咨询离您最近的 Chipnobo 销售办事处以获得进一步帮助。