

WSTQ5080AN-L**Smart High-Side Power Switch Quad Channel, 80mΩ, DFN9×6-14L , AEC-Q100 qualified****Application**

- ◆ Suitable for resistive, inductive and capacitive loads
- ◆ Replaces electromechanical relays, fuses and discrete circuits
- ◆ Most suitable for loads with high inrush current, such as lamps
- ◆ Suitable for 24 V and 48 V trucks + trailer and transportation systems

Package	DFN9×6-14L
Marking	WSTQ5080ANL

Basic Features

- ◆ PRO-SIL™ ISO 26262-ready for supporting the integrator in evaluation of hardware element according to ISO 26262:2018 Clause 8-13
- ◆ Quad channel device
- ◆ Very low stand-by current
- ◆ 3.3 V and 5 V compatible logic inputs
- ◆ Optimized electromagnetic compatibility
- ◆ Very low electromagnetic susceptibility
- ◆ Adjustable current limitation

**Diagnostic Functions**

- ◆ Proportional load current sense
- ◆ High current sense precision for wide range currents
- ◆ Off-state open load detection
- ◆ OUT short to VS detection
- ◆ Overload and short to ground latch-off
- ◆ Thermal shutdown latch-off
- ◆ Very low current sense leakage


**Protection Functions**

- ◆ Undervoltage shutdown
- ◆ Overvoltage clamp
- ◆ Load current limitation
- ◆ Self limiting of fast thermal transients
- ◆ Protection against loss of ground and loss of VS
- ◆ Thermal shutdown

**Product Summary**

Parameter	Symbol	Value
Max. transient supply voltage($T_j \geq 25^\circ\text{C}$)	V_S	70V
Operating voltage range	V_{NOM}	5-58V
On-state resistance (per channel, $T_j = 25^\circ\text{C}$)	R_{ON}	80mΩ
Nominal load current (one channel active, $T_j = 25^\circ\text{C}$)	$I_{L(\text{NOM})1}$	2.5A
Nominal load current (All channels active, $T_j = 25^\circ\text{C}$)	$I_{L(\text{NOM})2}$	2A
Typical current sense ratio ($I_{\text{OUT}}=1\text{A}$)	K	820
Current limitation	I_{LIMH}	Adjustable
Supply current in sleep	I_{SLEEP}	5uA

Typical Application Circuit

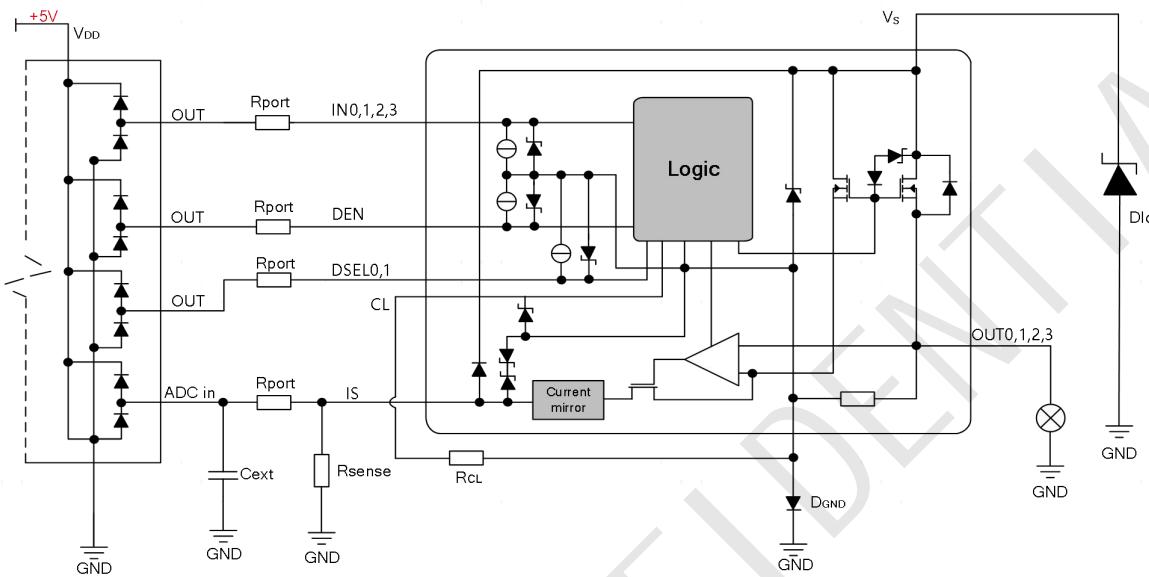

Note1: For D_{GND} , the diode with lower V_F is advisable.