
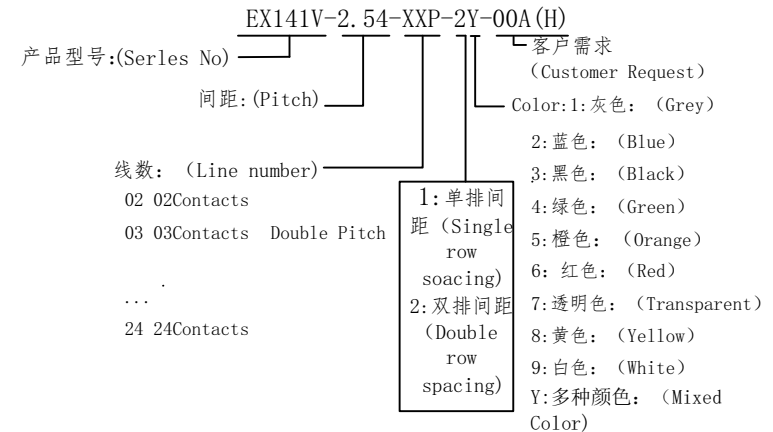


P=2.54mm,N为孔位数 (N for hole digits),有效位数为 (Significant Digits):02P - 24P (可做更长线数)

N	02P	03P	04P	05P	06P	07P	08P	09P	10P	11P	12P	13P	14P	15P	16P	17P	18P	19P	20P	21P	22P	23P	24P
B	2.54	5.08	7.62	10.16	12.7	15.24	17.78	20.32	22.86	25.4	27.94	30.48	33.02	35.56	38.1	40.64	43.18	45.72	48.26	50.8	53.34	55.88	58.42
D	7.62	10.16	12.7	15.24	17.78	20.32	22.86	25.4	27.94	30.48	33.02	35.56	38.1	40.64	43.18	45.72	48.26	50.8	53.34	55.88	58.42	60.96	63.5

版次 Version	变更内容 Rev. Contact	变更者 Change Person	发行日期 DATE	未注公差 (General tolerance)						
				0 to 6	6 to 30	30 to 60	60 to 150	150 to	X ±2°	XX ±1°
				±0.25	±0.40	±0.60	±1.00	±1.50	0.1/10	

技术参数 Technical Datn		UL	IEC(III/2)
额定电压	Rated Voltage (V)	150V	160V
额定电流	Rated Current (A)	4A	2A
耐电压	Withstanding voltage	AC 1500V/1Min	
使用环境温度	Opersting tempersture	-40~+105° C	
瞬时温度	Max soldering	+250° C 5 Sec	
间距	Pitch	2.54	
线数范围	Poles	N = 02P-XXP	
剥线长度	Stripping Length	10mm	
使用线径	Wire range	26-16AWG	

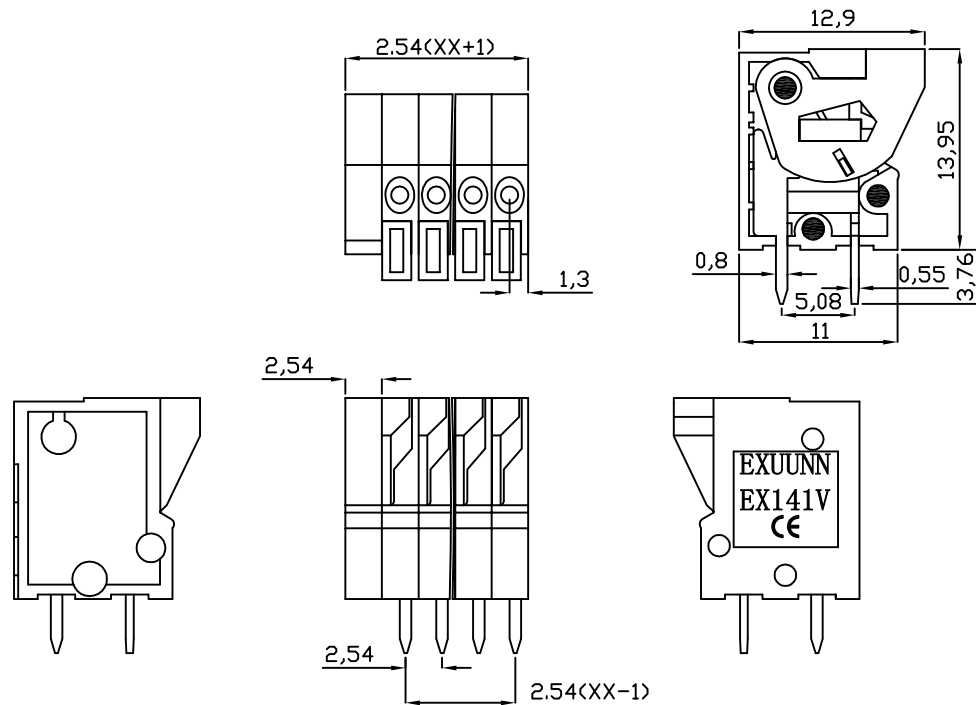

材质及表面处理 Material and surface treatment

绝缘材质	Housing	PA66	UL94V-0
簧片	Wire guard	磷青铜, 镀镍	Phosphor bronze, Ni plated
焊针	Pin header	黄铜, 镀锡	Brass, Tin plated

EXUUNN

慈溪伊讯电子厂 (普通合伙)

CiXi Exuunn ELECTRONICS FACTORY (GENERAL PARTNERSHIP)

型号 (Type): EX141V-2.54-XXP-2Y-00A(H)

核准 (Approval):	日期 (Date):	图号 (Drawing):	
审核 (Audit):	日期 (Date):	单位 (Units) :mm	页码 (Page) :1/1
设计 (Design):	日期 (Date):	比例 (Scale): 1:1	⊕ ⊞