
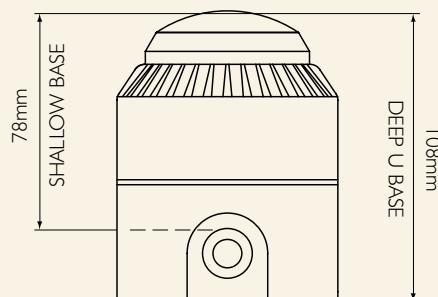


ROLP SOLISTA LED

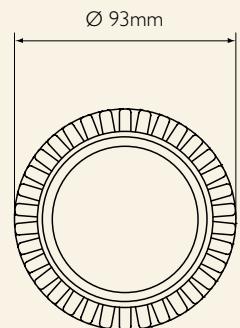

The use of beacons to supplement audible alarms is becoming increasingly common. A combined sounder beacon allows both an audible and visual alarm to be provided but requires only a single installation point. LED beacons have a dramatically lower current consumption than that of traditional xenon beacons making them ideal for applications where sounder circuit capacity is limited.

- ULTRA LOW CURRENT – LED TECHNOLOGY
- SOUNDER & BEACON WITH A SINGLE INSTALLATION POINT
- UNOBTRUSIVE LOW PROFILE DESIGN
- STANDARD FULLEON BASE SIMPLIFIES SYSTEM UPGRADES
- LOCKABLE BASE

Specification

Voltage	9 to 28Vdc
Current	20mA (sounder set to tone 3)
Sound Output	102dB(A)
Flash Rate	1Hz fixed
Flash Intensity	>0.5Cd
Temperature	-10°C to + 55°C
Monitoring	Reverse polarity
Construction	ABS Body / Polycarbonate Lens
IP Rating	IP54 (Shallow Base) IP65 (Deep / U Base)
Lens Colour	Red
Body Colour	Red or White
Weight	0.3Kg