

Product data sheet

Characteristics

XZCPA1241L5

pre-wired connectors XZ - elbowed female -
M12 - 4 pins - cable PVC 5m



Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Pre-wired connectors
Series name	Application

Complementary

Electrical connection	Elbowed female connector M12, 4 pins
Cable connector fixing	Screw-on
Collar material	Stainless steel 316L
Status LED	Without
Cable length	16.40 ft (5 m)
Cable outer diameter	0.21 in (5.3 mm)
Cable composition	4 x 0.34 mm ²
Wire insulation material	PVC
[Ue] rated operational voltage	250 V AC 300 V DC
Line Rated Current	4 A
Contact resistance	5000 µOhm
Minimum insulating resistance	1 GΩ
Net Weight	0.42 lb(US) (0.19 kg)

Environment

IP degree of protection	IP69K
Ambient air temperature for operation	-13...185 °F (-25...85 °C) static
Ambient air temperature for storage	-31...212 °F (-35...100 °C)

Ordering and shipping details

Category	22483 - MACHINE CABLES
Discount Schedule	DS3
GTIN	03389119021487
Nbr. of units in pkg.	1
Package weight(Lbs)	0.49 lb(US) (0.22 kg)
Returnability	Yes
Country of origin	PL

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	1.42 in (3.6 cm)
Package 1 width	6.06 in (15.4 cm)
Package 1 Length	6.57 in (16.7 cm)


Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Diisobutyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	<input checked="" type="checkbox"/> REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <input checked="" type="checkbox"/> EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<input checked="" type="checkbox"/> Yes

Contractual warranty

Warranty	18 months
----------	-----------


Dimensions

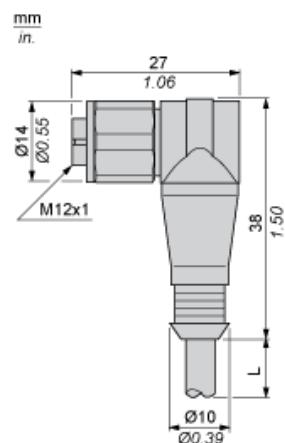

L : Length of cable

Connections and Schemes

Connector



BN : Brown
BK : Black
BU : Blue
WH : White