

SOT-23 Plastic-Encapsulate Transistors


TRANSISTOR(NPN)

Features

- For general AF applications
- High collector current
- High current gain
- Low collector-emitter saturation voltage
- Complementary types: BC807 (PNP)

Limiting Values (Absolute Maximum Rating)

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	50	V
V_{CEO}	Collector-Emitter Voltage	45	V
V_{EBO}	Emitter-Base Voltage	5	V
I_C	Collector Current	0.5	A
P_C	Collector Power Dissipation	300	mW
$R_{\theta JA}$	Thermal Resistance From Junction To Ambient	417	°C/W
T_j	Junction Temperature	150	°C
T_{stg}	Storage Temperature	-55~+150	°C

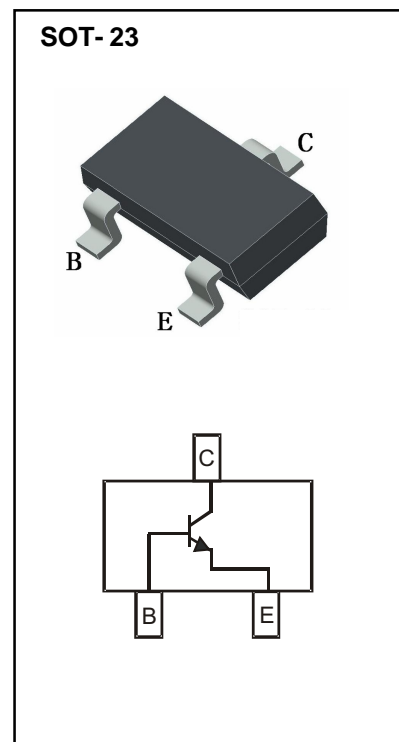









Electrical Characteristics (T=25°C Unless otherwise specified)

.....DUfUa YHf'	'Gna Vc''	'Hgh VtbX]hcbg'	'A in	Typ'	A ax	Unit
7c''YWcf!VUgYVfYU_Xck b'j c'fUj Y'	V_{CBO}	$I_C=10\mu A, I_E=0$	50			V
7c''YWcf!Ya]Hf' VfYU_Xck b'j c'fUj Y'	V_{CEO}	$I_C=10mA, I_B=0$	45			V
9a]Hf'!VUgYVfYU_Xck b'j c'fUj Y'	V_{EBO}	$I_E=1\mu A, I_C=0$	5			V
7c''YWcf'W HcZzW ffYbh	I_{CBO}	$V_{CB}=45V, I_E=0$			0.1	μA
9a]Hf'W HcZzW ffYbh	I_{EBO}	$V_{EB}=4V, I_C=0$			0.1	μA
87'W ffYbh[Ujb'.....	$h_{FE(1)}$	$V_{CE}=1V, I_C=100mA$	100		600	
	$h_{FE(2)}$	$V_{CE}=1V, I_C=500mA$	40			
7c''YWcf!Ya]Hf'gUi fUjcb'j c'fUj Y'	$V_{CE(sat)}$	$I_C=500mA, I_B=50mA$			0.7	V
6UgY!Ya]Hf'gUi fUjcb'j c'fUj Y'	$V_{BE(sat)}$	$I_C=500mA, I_B=50mA$			1.2	V
6UgY!Ya]Hf'j c'fUj Y'	V_{BE}	$V_{CE}=1V, I_C=500mA$			1.2	V
7c''YWF'VUdUW]UbW'	C_{ob}	$V_{CB}=10V, f=1MHz$		10		pF
HfUg]hcb'ZYei YbWni	f_T	$V_{CE}=5V, I_C=10mA$ $f=100MHz$	100			MHz



CLASSIFICATION OF h_{FE}

FUb_'	67, %!%'	67, %!&'	67, %!('\$'
FUb[Y'	%'\$!&)'	%'\$('\$'	&)'!*\$'\$'
AUf_]b['			

Typical Characteristics

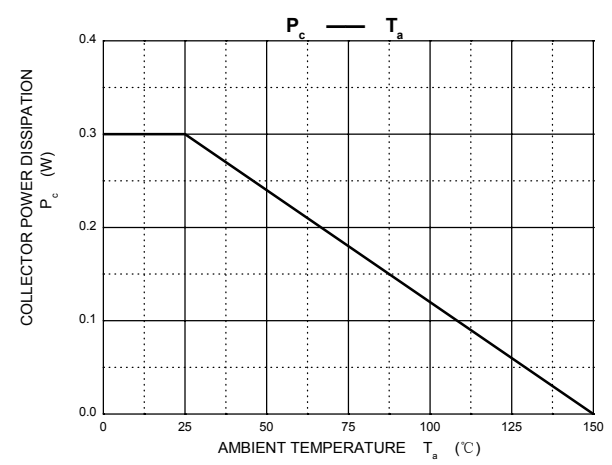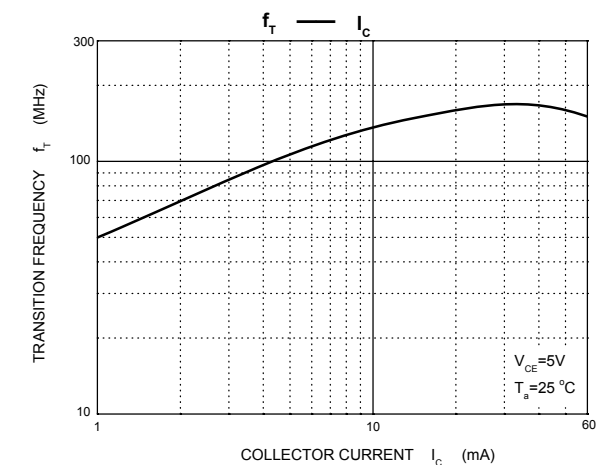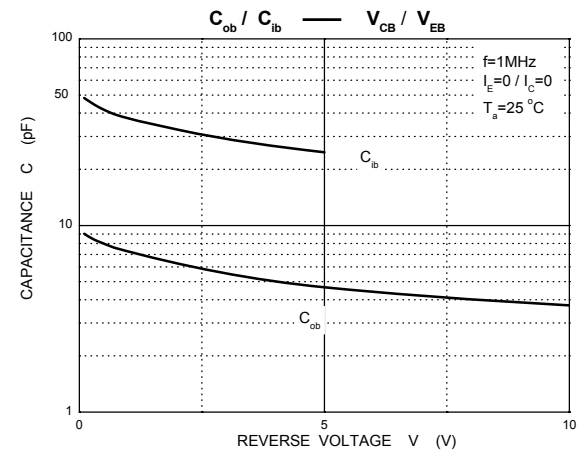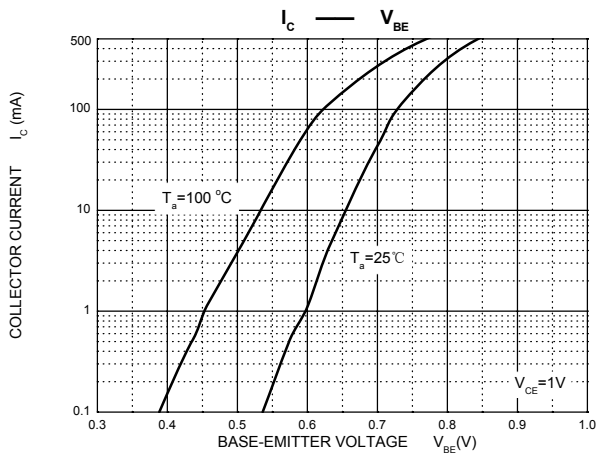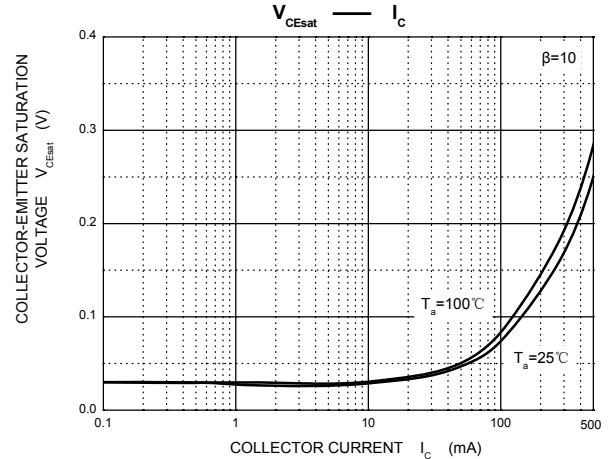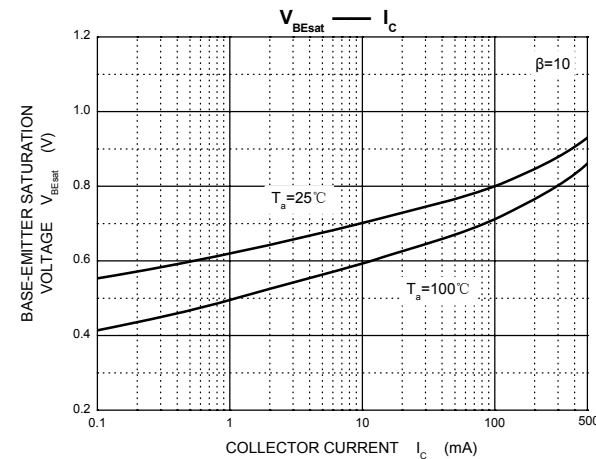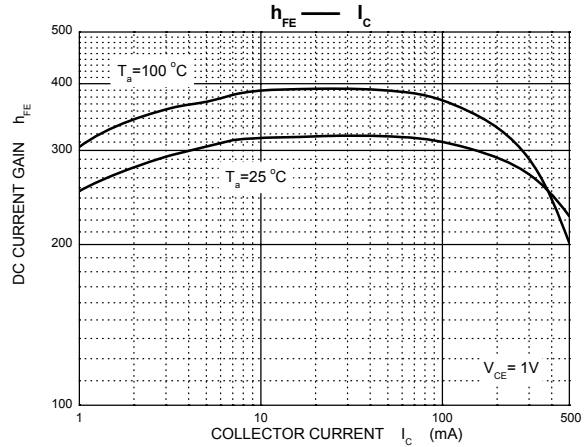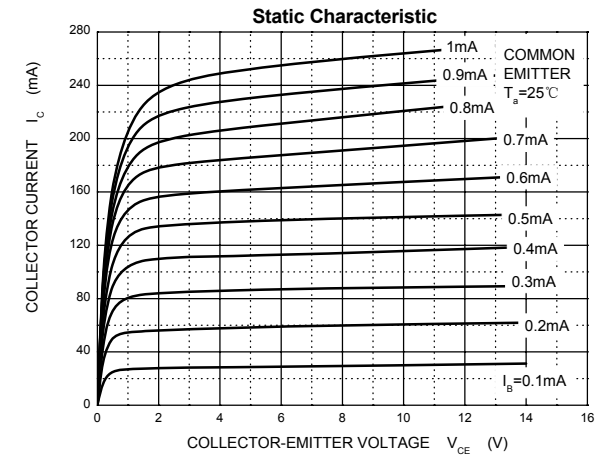


SOT-23 Package Outline Dimensions

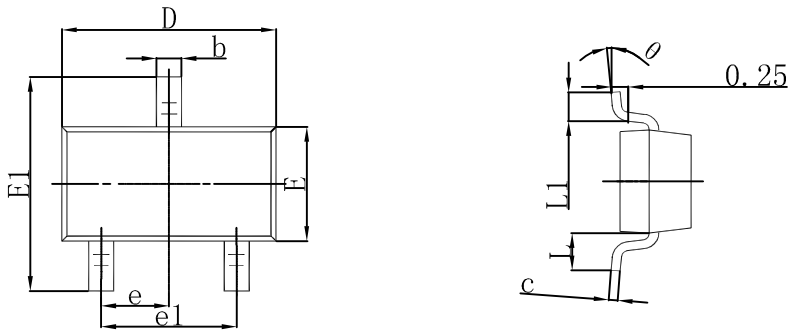

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP		0.037 TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

SOT-23 Suggested Pad Layout



Note:


1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.

NOTICE

JSKD reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. JSKD does not assume any liability arising out of the application or use of any product described herein.

Reel Taping Specifications For Surface Mount Devices-SOT-23

SOT-23 Embossed Carrier Tape

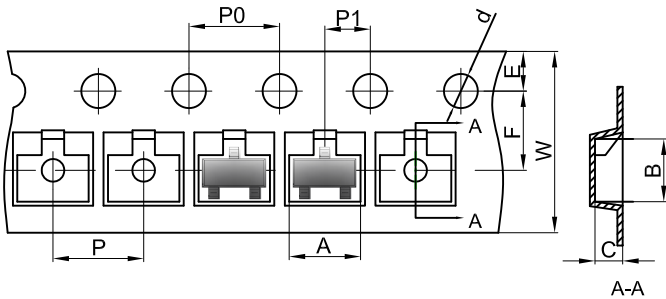


Packaging Description:

SOT-23 parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000 units per 7" or 17.8cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).


Dimensions are in millimeter

Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOT-23	3.15	2.77	1.22	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00

SOT-23 Tape Leader and Trailer

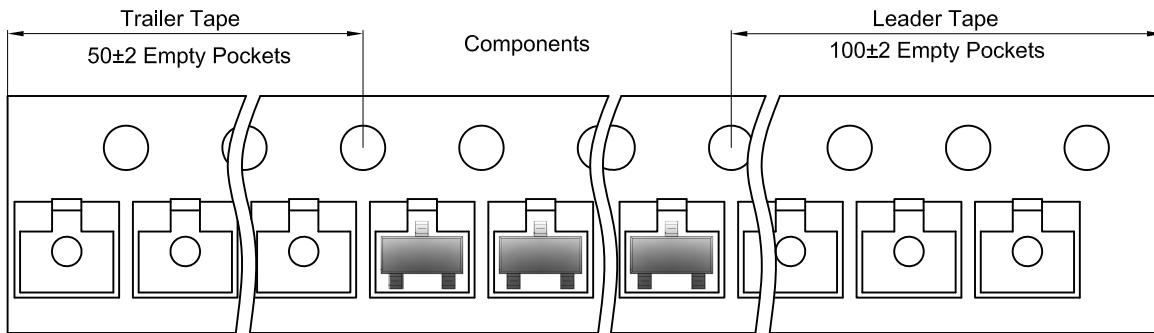

SOT-23 Reel

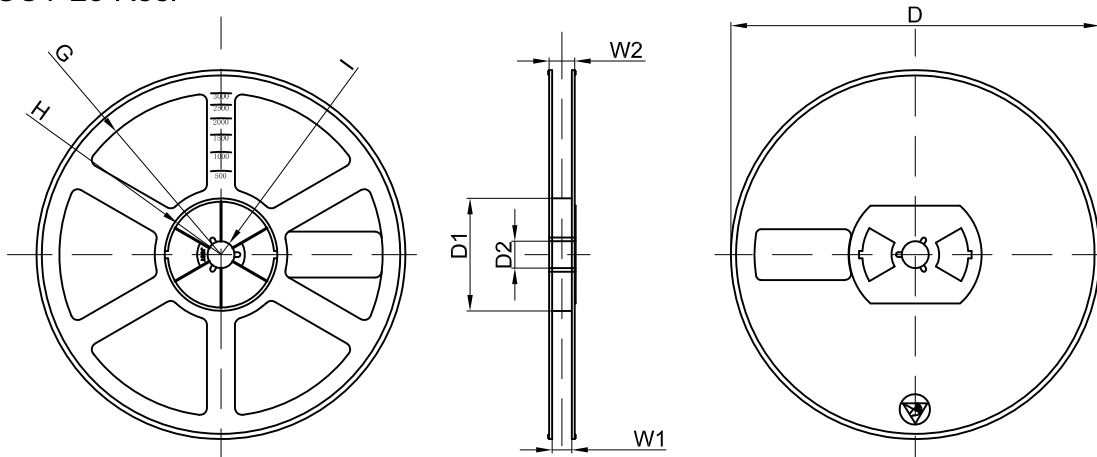

Dimensions are in millimeter

Reel Option	D	D1	D2	G	H	I	W1	W2
7"Dia	Ø178.00	54.40	13.00	R78.00	R25.60	R6.50	9.50	12.30

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 inch	45,000 pcs	203×203×195	180,000 pcs	438×438×230	