


未注公差/General tolerances (mm)											0.1/10		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500
~	3	6	10	18	30	50	80	120	180	250	315	400	500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50
											±2		

UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	300/16	300/16	600/5
UL 标准/UL Standard:	F	/	/
额定电压/电压/Rated Voltage(V)/Current(A)	600/16	/	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电压/Rated Voltage(V)/Current(A)	500/20	630/20	1000/20
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	6	6	6
间距/Pitch(mm)/线数范围/Poles	7.5/N=03~12P		
使用温度范围/Operating temperature(°C)	-40~+130		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number. PANTONE / RAL	/		

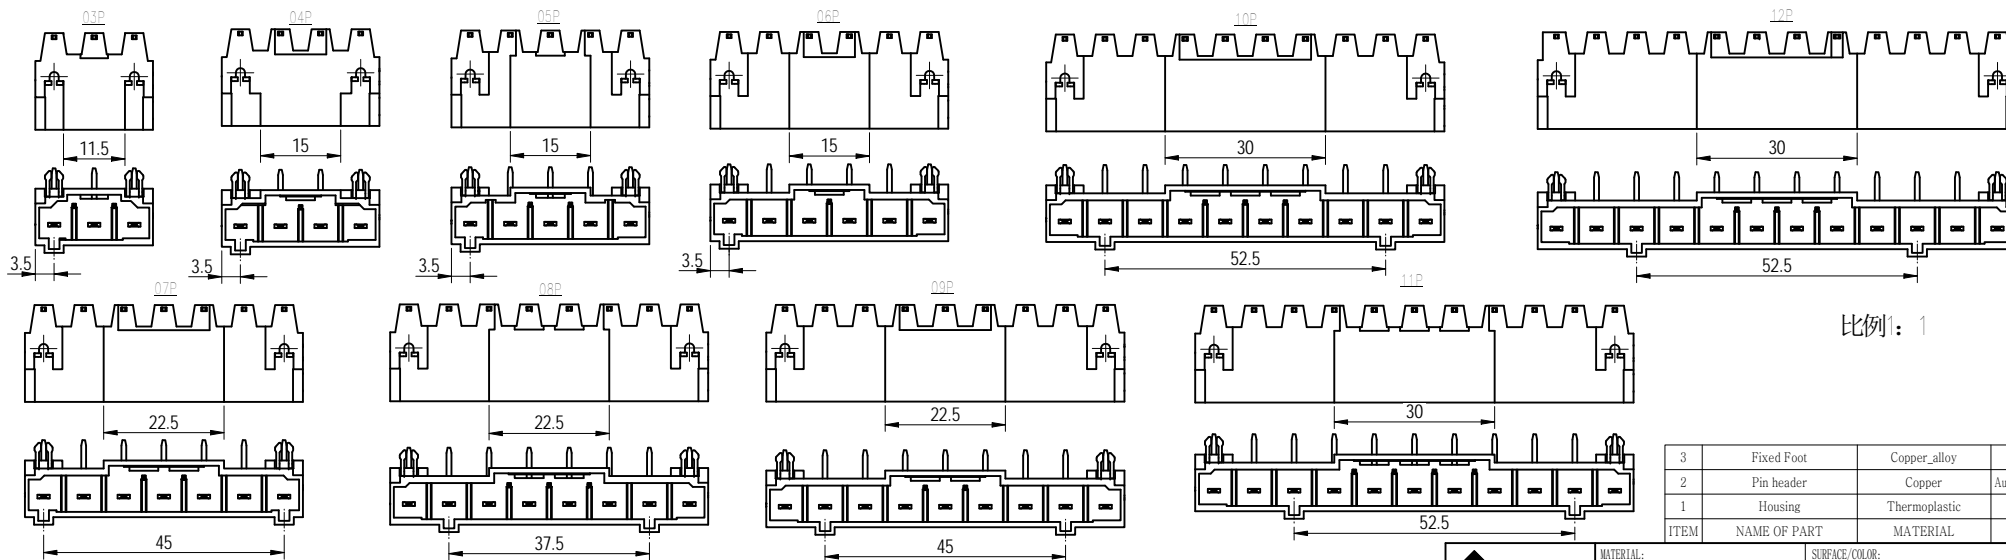

比例 1:1

ITEM	NAME OF PART	MATERIAL	NOTES
3	Fixed Foot	Copper_alloy	Sn Plated
2	Pin header	Copper	Au/Sn Plated Partial
1	Housing	Thermoplastic	UL94V-0

	MATERIAL:	SURFACE/COLOR:
	MAT NO./REV: - / 00	MAT STATUS: 批量

APPD: 竺春华	2022.10.12	NAME:	9EDGRC-7.5-XXP-1Y-1000Z(H)			
CHKD: 黄耀志	2022.10.12	DRAWING NO.:	200019471	TYPE:	CUSTOMER DRAWING	
DRFT: 方哲盛	2022.10.12	DRAWING STATUS:	已发布	SCALE:	2:1	
REV	ECN	DESCRIPTION	DRFT	DATE	SHEET	
00			方哲盛	2022.10.12	1/1	

00			方哲盛	2022.10.12	1/1
REV	ECN	DESCRIPTION	DRFT	DATE	SHEET
			方哲盛	2022.10.12	1/1

Transfer or duplication of this document as well as the utilization of its contents without the written consent of DEGSON is prohibited. All rights reserved for patent. 复制或再行发布此文件以及在没有 DEGSON 书面同意的情况下使用其内容均被禁止。所有权利保留。如有侵权，请联系 DEGSON 处理。