


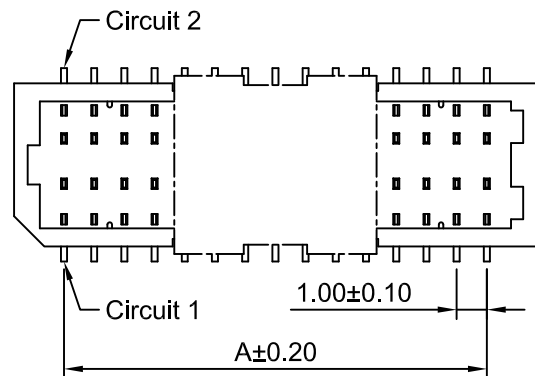

Ordering Information:

A1002WV-S-F-2xXP - *** - ***
1 2 3

1.Part NO.

2.Material:





(Blank): Nylon 6T,UL94V-0(Ivory)

GWT: Nylon 6T,UL94V-0(Black),
IEC 60335-1,5th Edition
Glow Wire Capable.

3.Finish:

(Blank): Tin over Nickel(Sn:80u" Min.,Ni:30u" Min.)

G: Gold over Nickel(Au:1u" Ni:≥30u")

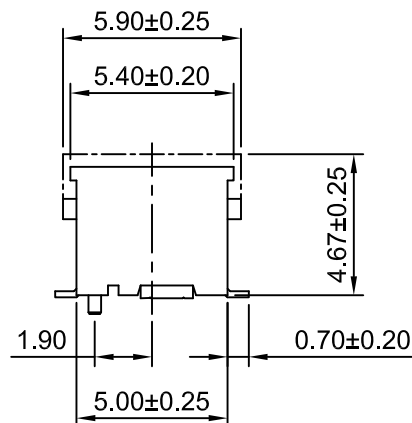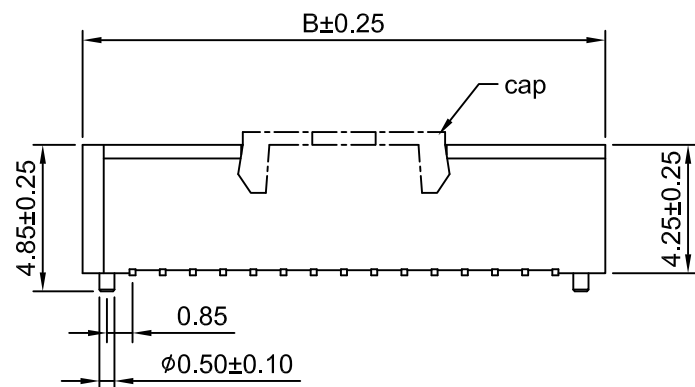

SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 50V AC,DC

Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact Resistance: $20\text{m}\Omega$ Max.

Insulation Resistance: $100\text{M}\Omega$ Min.


Withstanding Voltage: 500V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 6T,UL94V-0(Ivory)

Ordering Information & Dimensions

Circuits	Dimensions(mm)	
	A	B
2x5P	4.00	7.30
2x6P	5.00	8.30
2x8P	7.00	10.30
2x10P	9.00	12.30
2x12P	11.00	14.30
2x15P	14.00	17.30
2x20P	19.00	22.30
2x25P	24.00	27.30

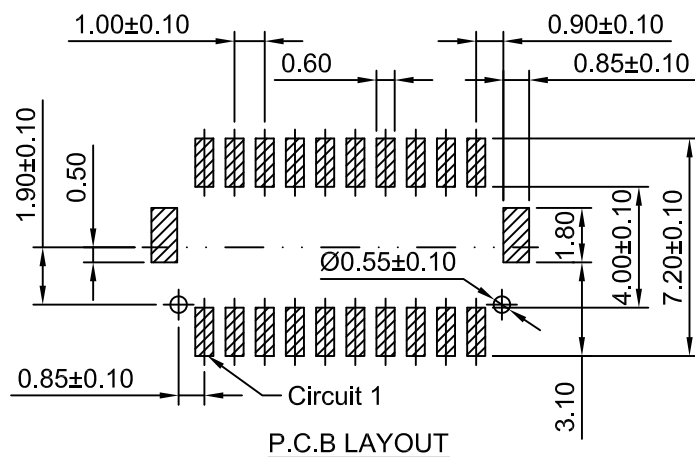

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	4:1	1 of 1	1.00mm Pitch Vertical Wafer- SMT Type	
DRAWN	CHK'D	APPR		
Haisen Li	Diankui Wan	Jack Yin	DRAWING NO.	
General Tolerances			A1002WV-S-F-2xXP	
A2	CHANGE THE DRAWING	2022.07.11	THIRD ANGLE PROJECTION	REV A2
A1	CHANGE THE DRAWING	2018.12.21		
A0	NEW RELEASE	2005.05.10		
REV	DESCRIPTION	DATE		