

















PCB Layout




Pin Layout Front view




Electrical

Contacts	2	3	4	4D	5	5B	6	8	12
Rated current/ Rated voltage	4A/250V	4A/250V	4A/250V	4A/250V	4A/60V	4A/60V	2A/30V	2A/30V	1.5A/30V
Rated pulse voltage	2500V	2500V	2500V	2500V	1500V	1500V	800V	800V	800V
Insulation resistance (MΩ)	≥100	≥100	≥100	≥100	≥100	≥100	≥100	≥100	≥100
Contact resistance (mΩ)	≤5	≤5	≤5	≤5	≤5	≤5	≤5	≤5	≤5

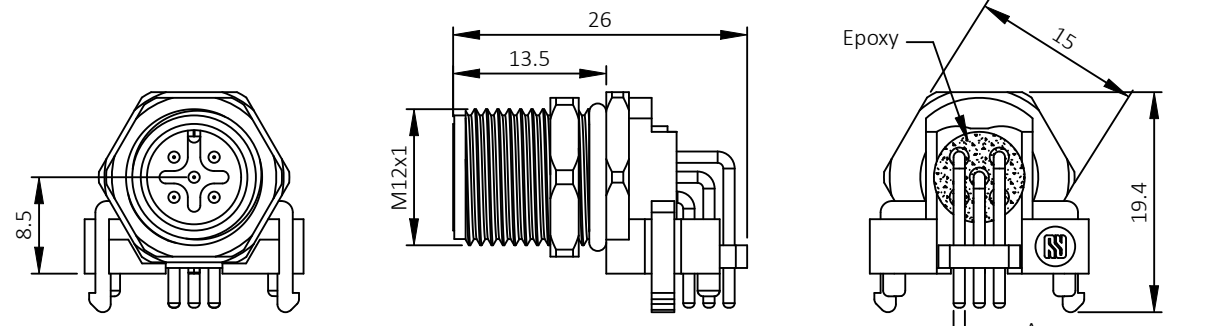

A:
2-5P:Ø1mm
8P:Ø0.8mm
12p:Ø0.6mm

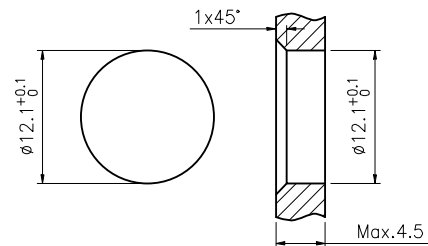

Recommended Panel cut-out

General features:
Comply with IEC61076-2
Mating Cycles: min 500
Temperature Range: -40 to 85° C
Degree of Protection: IP67

Materials:
Contact:CuSn
Contact plating:Gold plated
Contact insert:PA66+GF UL94 black
Shell:CuZn nickel plated
Nut:CuZn nickel plated
Sealing:NBR black

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	RENHOTEC GROUP	
	PART DESCRIPTION: R/A M12 male,Panel Mount,PCB Type	
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 - 120mm ± 0.30mm	Appr: JIM.KING Check: _____ Draw: DING	P/N: RHT-634-3391 Date: 2024.01.13 Scale: Free Unit: MM Type: Z Page: 1/1