


**MATERIALS**


1. HOUSING : LCP (UL 94V-0), BLACK.
2. TERMINAL : COPPER ALLOY,  
GOLD PLATED ON CONTACT AREA,  
GOLD FLASH PLATED ON SOLDER TAIL,  
NICKEL UNDERPLATED OVER ALL.
3. MID PLATE : STAINLESS STEEL.
4. SHELL : STAINLESS STEEL, NICKEL PLATED.

**SPECIFICATION**

1. CURRENT RATING : 5.0A FOR Vbus PIN,  
1.25A FOR Vconn PIN,  
0.25A FOR OTHER PINS.
2. VOLTAGE RATING : 20V DC MAX.
3. CONTACT RESISTANCE : 40mΩ.
4. INSULATION RESISTANCE : 100MΩ MIN.
5. DIELECTRIC WITHSTANDING VOLTAGE : 100 VAC MIN.
6. OPERATING TEMPERATURE : -40°C TO +85°C.
7. MATING FORCE : 5~20N.
8. UNMATING FORCE : 8~20N.
9. DURABILITY : 10,000 CYCLES.
10. RECOMMENDED PROCESS :  
THE PEAK TEMPERATURE ON THE BOARD SHALL  
MAINTAIN 260°C.



**Ordering Information:**

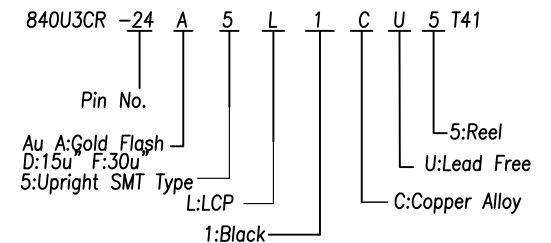



**PIN ASSIGNMENT:**


PIN	Signal Name	PIN	Signal Name
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	Vbus	B9	Vbus
A5	CC1	B8	SBU2
A6	Dp1	B7	DN2
A7	Dn1	B6	DP2
A8	SBU1	B5	CC2
A9	Vbus	B4	Vbus
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND

**PROPRIETARY NOTE:**

This document contains confidential information and proprietary to Rego Electronics and shall not be reproduced or disclosed to other documents or used for any purpose other than that for which was obtained without the expressed written consent of Rego Electronics.

.X ± 0.30	APPROVED: Chris	 <a href="http://www.rego.com.tw">http://www.rego.com.tw</a>	
.XX ± 0.20	CHECKED: Andy		
.XXX ± 0.15	DRAWN: Vic		
X' ± 3'		TITLE: USB Type C 24 Pins Female Upright SMT Type , Gen 2	
	UNITS: mm	SCALE: NONE	PART NO: 840U3CR-24A5L1CU5T41
			SHEET: 1 OF 2

E	21.9.2023
REV	DATE

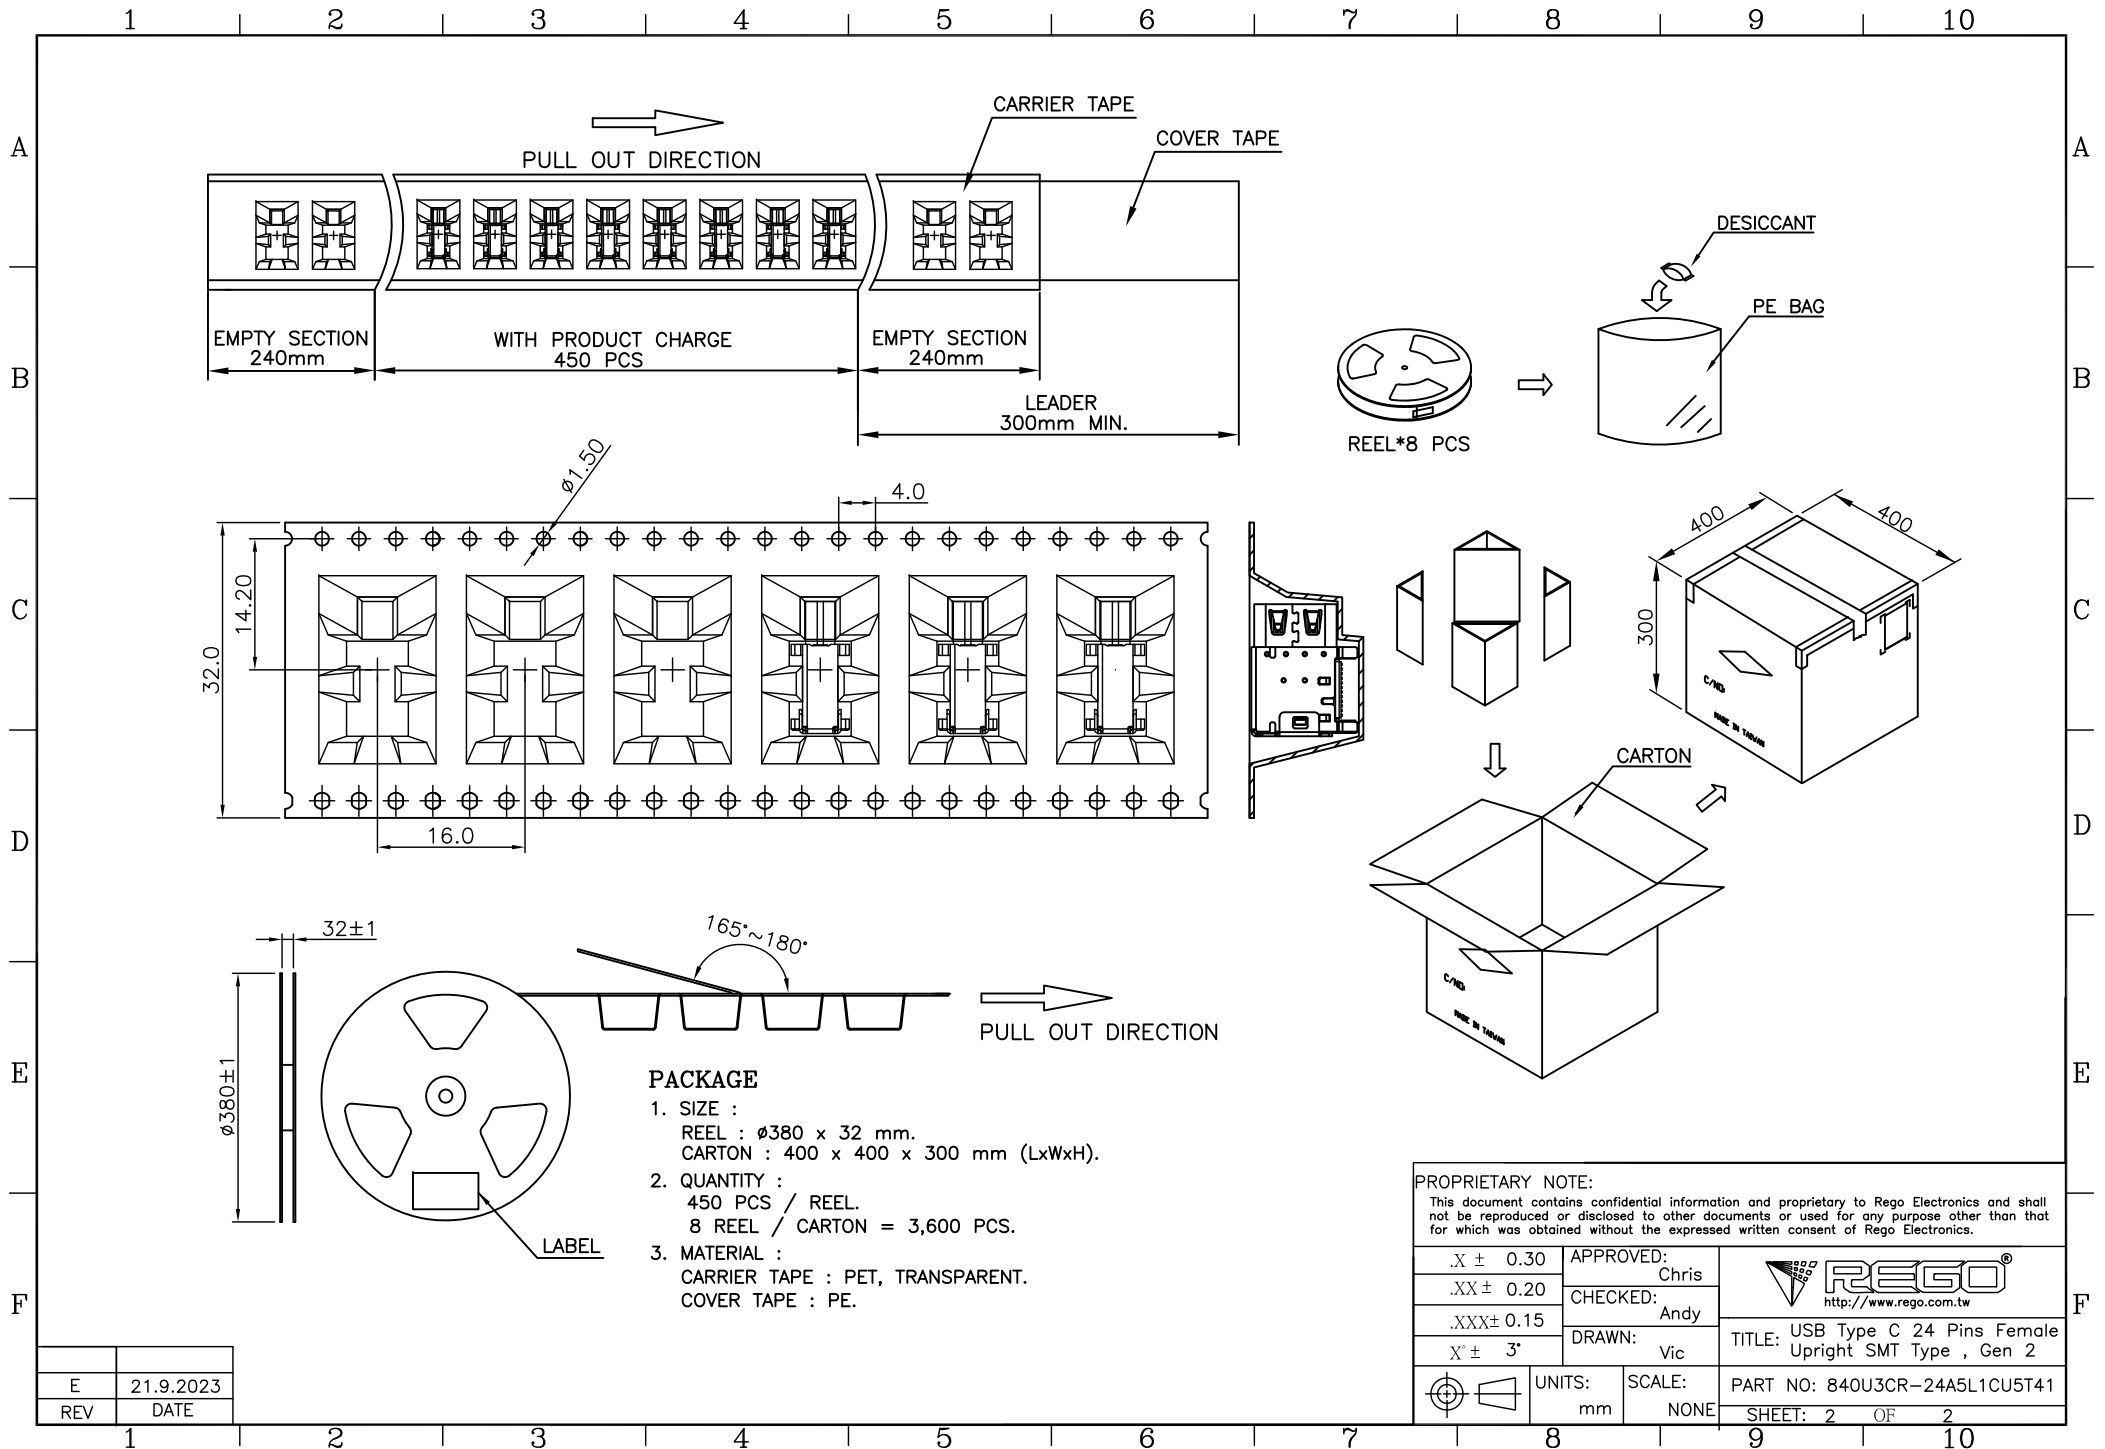

E	21.9.2023
REV	DATE