



NOTES:

- 1.HOUSING: LCP HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK
- 2.TERMINAL/GROUND PLANE:PHOSPHOR BRONZE
PLATING:10u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.
- 3.CODING INFORMATION: LB232-xxxS-B3R-01


- WATER CODE
- PACKING: R: CARRIER REEL
- MATERIAL: 3:LCP
- COLOR: B:BLACK
- S:SOCKET
- PIN
- PLATING: G:GOLD FLASH 2:3u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.
- 3:5u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.
- 4:10u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.
- 5:15u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.
- 6:30u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.
- 0.5 BTB
- HIGHLY: 32--3.25H
- LXWCONN BTB CONNECTOR SERIES

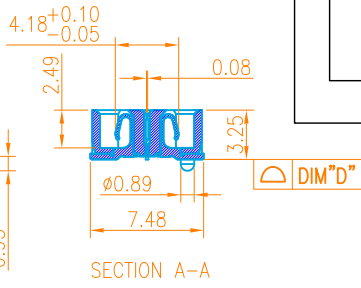

NO. of contacts	Dimensions			
	A.	B.	C.	D.
60	21.38	20.13	20.18	0.10
120	41.38	40.13	40.18	0.10
180	61.38	60.13	60.18	0.15
240	81.38	80.13	80.18	0.15
300	101.38	100.13	100.18	0.15

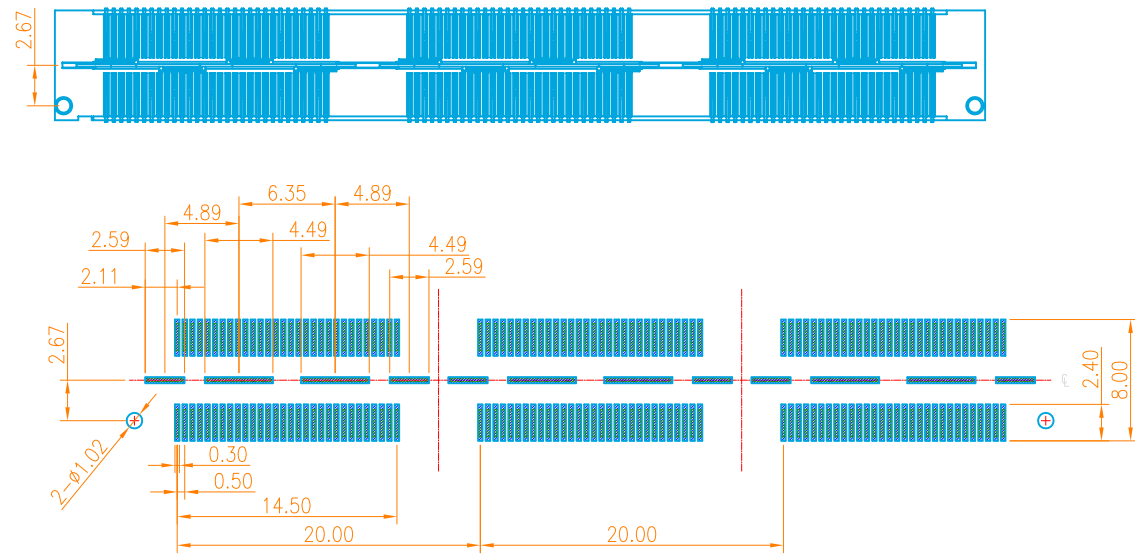

RECOMMENDED PCB PATTERN DIM.
TOLERANCE : ±0.05

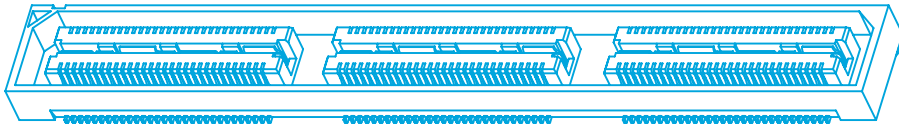

CUSTOMER		Lu Junhui		品名(TITLE): 0.5mm DOUBLE ROW BTB SOCKET H3.25	
一般公差 GENERAL TOLERANCE		制图(DR): 2018.12.11		料号(PART NO): LB232-xxxS-B3R-01	
.X ±0.30		审核(CHKD):		比例(SCALE): 1:1	
.XX ±0.20		料号(PART NO):		单位(UNITS): mm	
.XXX ±0.10		版本(REV): A		张数(SHEET): 1 OF 1	
ANGLES ±0° 30'		日期 DATE:		图幅(SIZE): A4	
修正(SER):		修改摘要 REVISION DESCRIPTION:		核准(APPD):	
签名 SIGNATURE:		日期 DATE:			

