

Specifications

Ordering Information

F185-12 16 A0 C RY E 1

备注 (Remark)





1. 材料 (MATERIAL)

胶芯: PA9T+30%G.F UL94V-0, 颜色: 黑色.
Housing: PA9T+30%G.F UL94V-0, Color: Black
端子: 青铜, 镍底30u"MIN, 表面镀普金
Contact: Bronze, GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP
Rating Current: 3 AMP.
接触阻抗: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.
绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance: 1000 MΩ MIN.
耐电压: AC 500V/分钟.
Withstanding Voltage: AC 500V/Minute.
温度范围: -40° C to +105° C
Temperature Range: -40° C to +105° C

NO. OF PINS PER ROW	Contact Full of Gold	INSULATOR MATERIAL	PACKING
2-40P	2-40P	A: PBT B: PA6T C: PA9T D: LCP	A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray
	A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	E0=0.8U" E1=1U" E2=1.5U" E3=2U" E4=3U" E5=5U" E6=10U" E7=15U" E8=20U" E9=30U"	
	S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature		

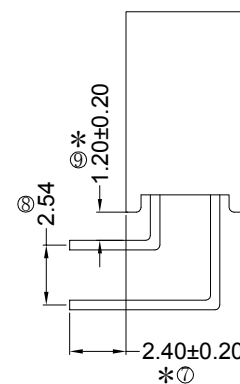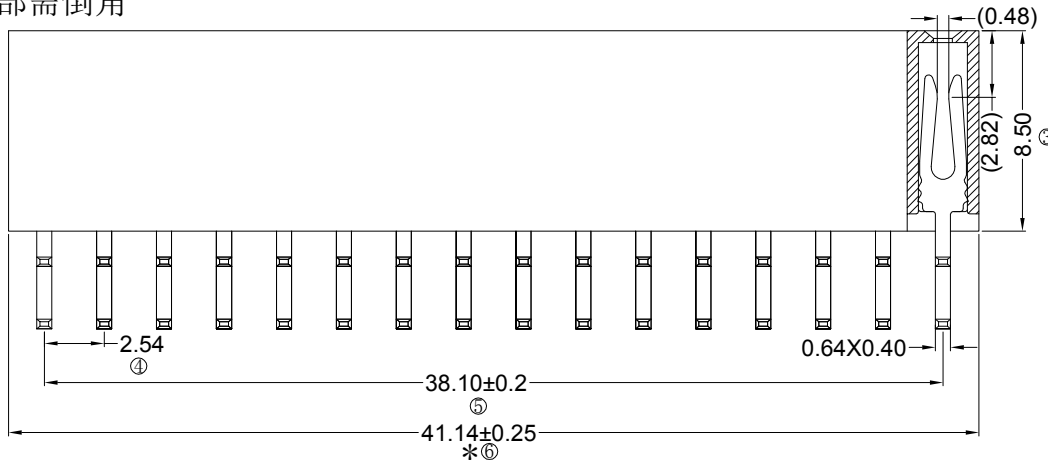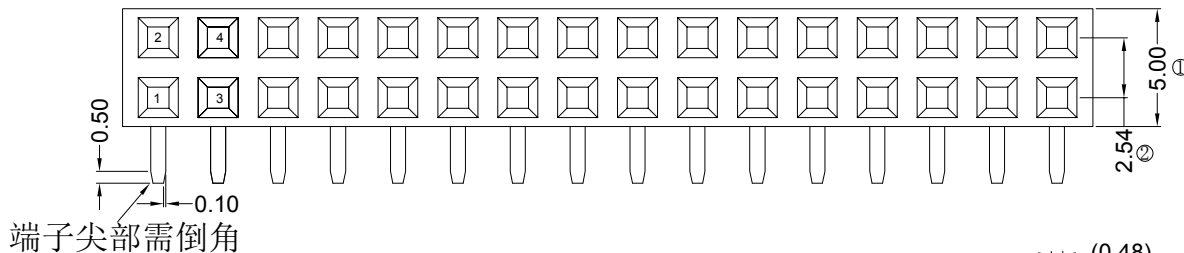

RoHS
COMPLIANT

客编:

- 注意事项
- 带*为品质重点检验尺寸
 - 端子尖部需倒角

				OPERATION	SCALE	Fit	Yxcon 东莞市宇熙精密连接器有限公司			
				X.X ±0.25	UNIT	MM	www.yxcon.com Dongguan Yuxi Electronic Co., Ltd.			
				X.XX ±0.20	SIZE	A4	DESIGN	李官森2022.08.20	PART NO	F185-1216A0CRYE1
				X.XXX ±0.10	SHEET	1/1	CHECK		TITLE	2.54排母8.5mm塑高 2*16P 90度 DIP:2.4 Y型 PA9T料 镀普金 盒装100PCS
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	Angle ±3°	PROJ.	APPROVE			Customer No.	
			新版发行	DIM TOL						