
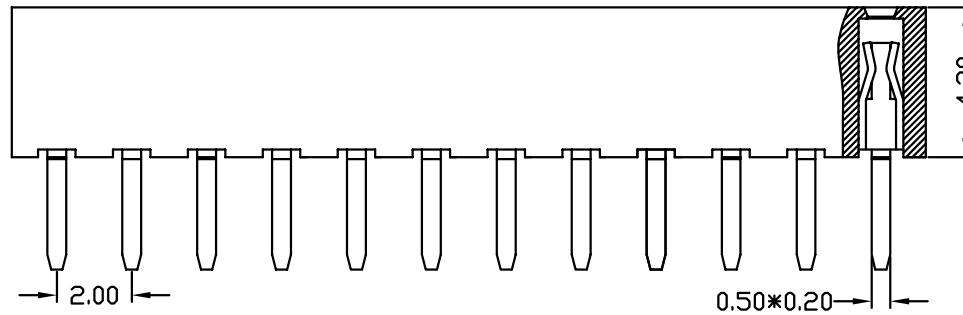


Specifications

备注 (Remark)
 1. 材料 (MATERIAL)
 胶芯: PA9T+30%G.F UL94V-0, 颜色: 黑色.
 Housing: PA9T+30%G.F UL94V-0, Color: Black
 端子: 青铜, 镍底30u"MIN, 表面镀锡
 Contact: Bronze, ORDINARY TIN PLATED OVER ALL
 30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):
 额定电流: 2 AMP
 Rating Current: 2 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V.
 Withstanding Voltage: AC 500V.
 温度范围: -40° C to +105° C
 Temperature Range: -40° C to +105° C

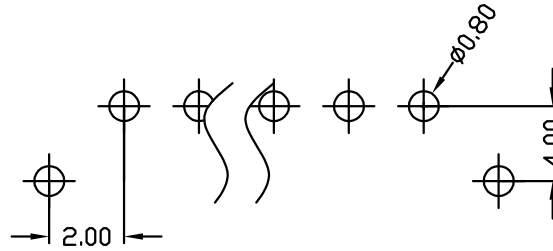

Ordering Information

F243-11 12 S1 C WU C 2

NO. OF PINS PER ROW	Contact Full Gold	Plating Semi-gold	INSULATOR MATERIAL	PACKING
1-50P	A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	B0=0.8U" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U"	E: PA6T C: PA9T D: LCP	A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray
	S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature			

客编:
 1. 第1. 12P反脚,
 2. 带*为品管检验尺寸。

注意事项

				OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co., Ltd.	
				X.X	+0.25	UNIT		MM			
				X.XX	+0.20	SIZE	A4	DESIGN	杨哲	PART NO	F243-1112S1CWUC2
				X.XXX	+0.10	SHEET	1/1	CHECK		TITLE	FH2.0*4.3 1*12P 蜈蚣脚 脚距4.0 DIP:3.2 镀亮锡 PA9T 第1. 12P反脚 管装
				Angle	+3°	PROJ.	⊕	APPROVE			
				DIM	TOL						