

Specifications

Ordering Information

P125-12 03 A0 C R 142 A 1

备注 (Remark)


1. 材料 (MATERIAL)

胶芯: PA9T无卤+30%G.F UL94V-0, 颜色:黑色.
 Housing: PA9T无卤+30%G.F UL94V-0, Color:Black
 四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN
 Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
 30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP
 Rating Current: 3 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V/分钟.
 Withstanding Voltage: AC 500V/Minute.
 温度范围: -40° C to +105° C
 Temperature Range: -40° C to +105° C

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Contact Full of Gold	Plating Semi-gold	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
15: 1.5mm	2-40P	A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	B0=0.8u" B1=1u" B2=1.5u" B3=2u" B4=3u" B5=5u" B6=10u" B7=15u" B8=20u" B9=30u"	A: PBT B: PA6T C: PA9T D: LCP		A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray
17: 1.7mm		S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature				
20: 2.0mm						
25: 2.54mm						
30: 3.0mm						

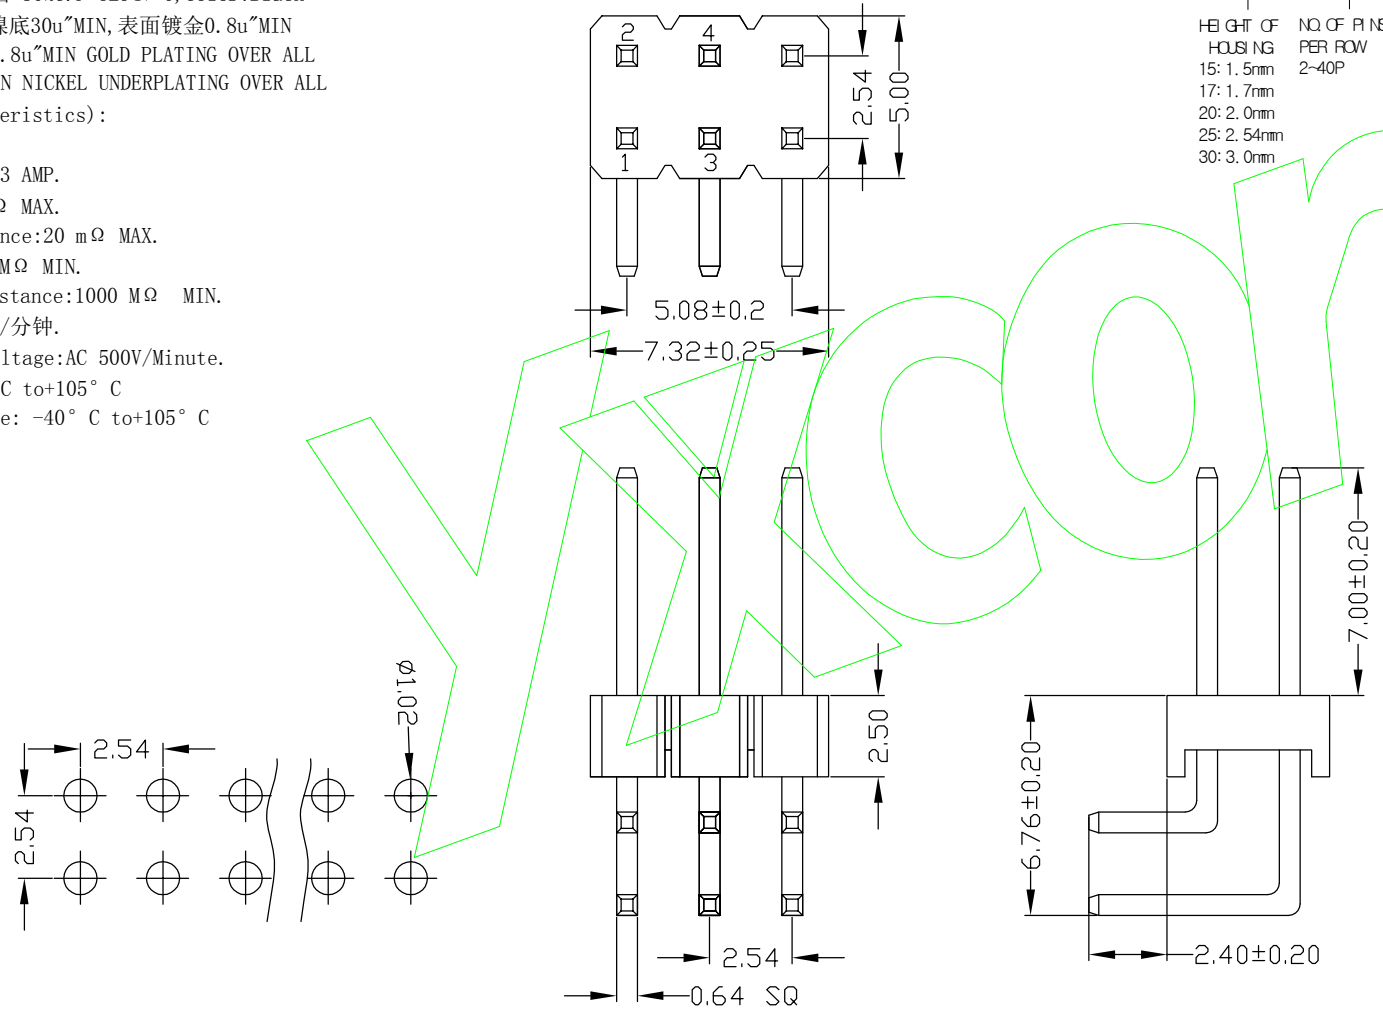

REV		DATE		MODIFICATION DESCRIPTION		CHANGE	APPROVE	OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co., Ltd.		
								X.X		UNIT		MM		PART NO. P125-1203A0CR142A1		
								X.XX		SIZE		A4		DESIGN 周芳杰		
								X.XXX		SHEET		1/1		CHECK		
								Angle		PRQJ.				APPROVE		
								DIM		TOL				TITLE: 2.54mm排针 型高2.5 2*3P 镀金 PA9T无卤料 90度 弯凹面 L=14.2/2.4(1.1)/7.0/19.2 袋装		
														Customer No.		