

Specifications

备注 (Remark)
 1. 材料 (MATERIAL)
 胶芯: PA9T+30%G.F UL94V-0, 颜色: 黑色.
 Housing: PA9T+30%G.F UL94V-0, Color: Black
 四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN
 Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
 30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):
 额定电流: 2 AMP
 Rating Current: 2 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V/分钟.
 Withstanding Voltage: AC 500V/Minute.
 温度范围: -40 °C to +105 °C
 Temperature Range: -40 °C to +105 °C

RoHS
COMPLIANT

客编:
 1. 带*为品质重点检验尺寸
 2. H=3.5 注意折弯方向


REV	DATE	SYMBOL	MODIFICATION DESCRIPTION
A1	2020.07.30		折弯处增加90° ⁺⁰ _{-2°} 管控角度
A0	2019.12.17	/	新版发行

Ordering Information

P220-22 08 A0 C R 145 A 1

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Contact Full Cf Gbl d	Series-gold	INSULATOR MATERIAL	LENGTH OF TERMINAL	PACKING
10: 1.0mm 15: 1.5mm 20: 2.0mm	2-40P	A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	B0=0.8u" B1=1u" B2=1.5u" B3=2u" B4=3u" B5=5u" B6=10u" B7=15u" B8=20u" B9=30u"	B: PA6T C: PA9T D: LCP	A: FE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray	

S1=Ordinary Tin Plated
 S2=Matte Tin Plated
 S3=Tin-plated High-temperature

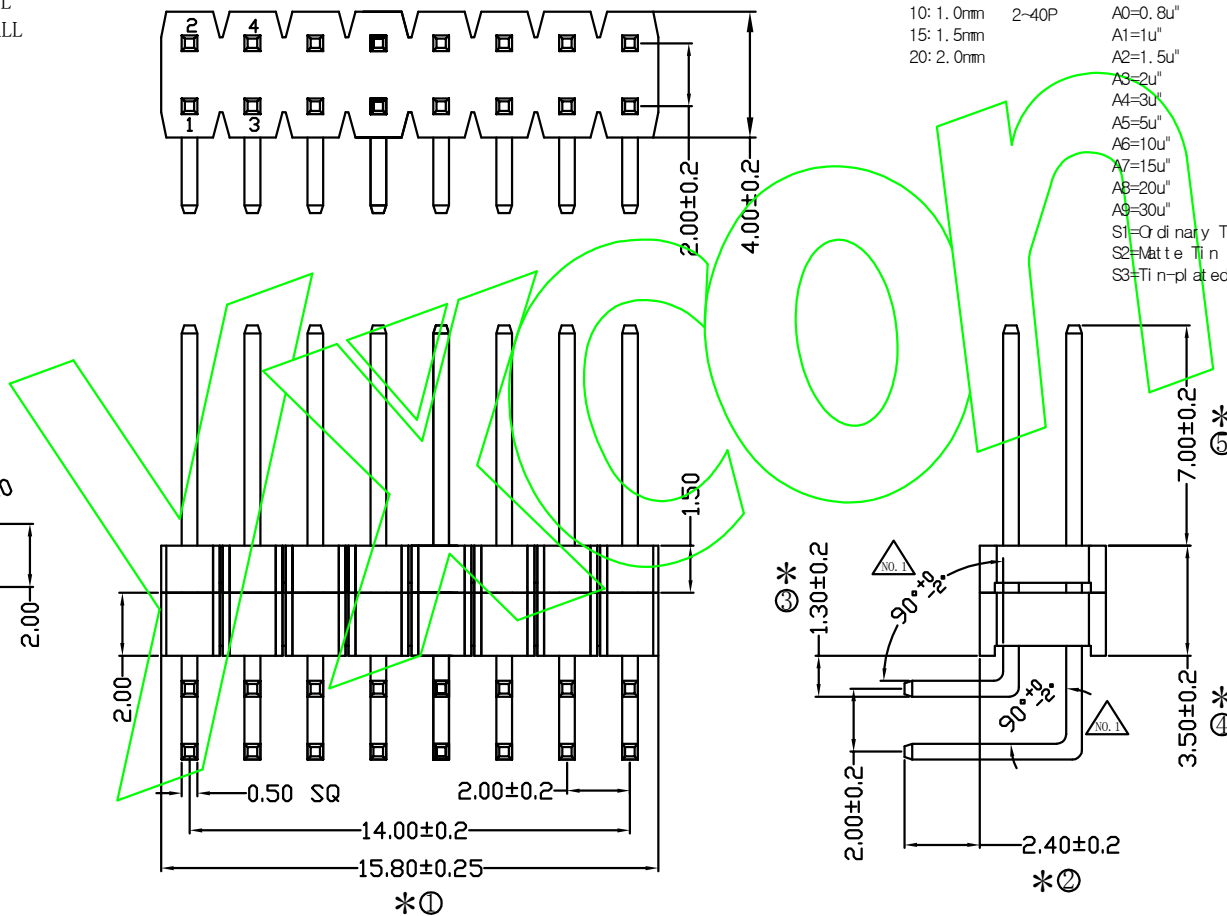

OPERATION		SCALE	Fit	Yxcon 东莞市宇熙精密连接器有限公司			
X.X	+0.25	UNIT	MM	Dongguan Yuxi Electronic Co., Ltd.			
X.XX	+0.20	SIZE	A4	DESIGN	秦星宇 2020.07.30	PART NO.	P220-2208A0CR145A1
X.XXX	+0.10	SHEET	1/1	CHECK		TITLE:	PH2.0*1.5 2*8P*2 H3.5 L=14.5/2.4(0.8)/7.0/18.5 90度 PA9T料 普金 200PCS/袋
Angle	+3°	PROJ.		APPROVE		Customer No.	
DIM	TOL						