

# Specifications

备注 (Remark)





## 1. 材料 (MATERIAL)

胶芯: LCP+30%G.F UL94V-0, 颜色: 黑色.  
 Housing: LCP+30%G.F UL94V-0, Color: Black  
 四方针: 黄铜, 镍底30u"MIN, 表面镀普金  
 Contact: Brass, GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

## 2. 特性 (characteristics):

额定电流: 2 AMP  
 Rating Current: 2 AMP.  
 接触阻抗: 20 mΩ MAX.  
 Contact Resistance: 20 mΩ MAX.  
 绝缘阻抗: 1000 MΩ MIN.  
 Insulating Resistance: 1000 MΩ MIN.  
 耐电压: AC 500V/分钟.  
 Withstanding Voltage: AC 500V/Minute.  
 温度范围: -40° C to +105° C  
 Temperature Range: -40° C to +105° C

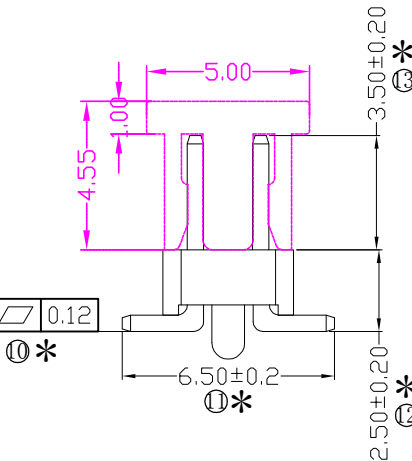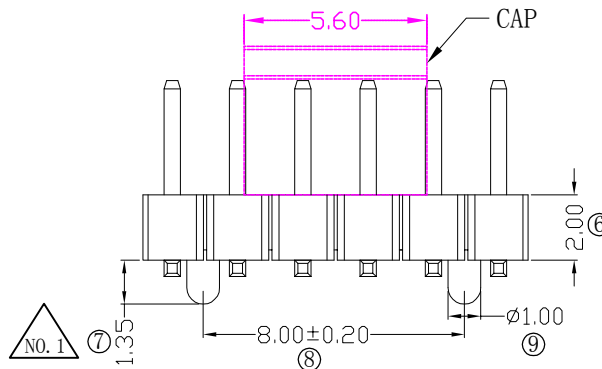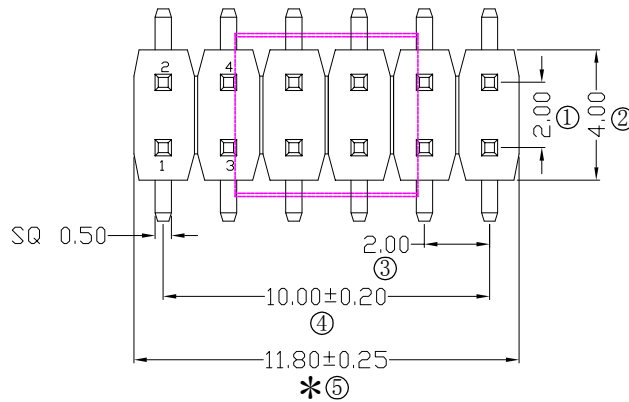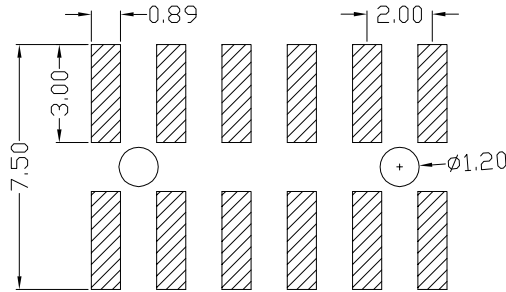

# Ordering Information

P220-12 06 A0 D M 078 B 2

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Contact Plating Full of Gold	Contact Plating Semi-gold	INSULATOR MATERIAL	LENGTH OF TERMINAL	PACKING
10: 1.0mm	2~40P	A0=0.8u"	B0=0.8U"	B: PA6T	TERMINAL	A: PE Bag
15: 1.5mm		A1=1u"	B1=1U"	C: PA9T		B: Tape & Reel
20: 2.0mm		A2=1.5u"	B2=1.5U"	D: LCP		C: Tube
		A3=2u"	B3=2U"			D: Tube+CAP
		A4=3u"	B4=3U"			E: Tray
		A5=5u"	B5=5U"			
		A6=10u"	B6=10U"			
		A7=15u"	B7=15U"			
		A8=20u"	B8=20U"			
		A9=30u"	B9=30U"			
		S1=Ordinary Tin Plated				
		S2=Matte Tin Plated				
		S3=Tin-plated High-temperature				

RoHS COMPLIANT

客编:

1. 带\*为品质重点检验尺寸

注意事项

				OPERATION	SCALE	Fit	Yxcon 东莞市宇熙精密连接器有限公司			
				X.X ±0.25	UNIT	MM	www.yxcon.com Dongguan Yuxi Electronic Co., Ltd.			
A1	2022.02.16	△	柱高改为1.35	X.XX ±0.20	SIZE	A4	DESIGN	李官森2022.02.16	PART NO.	P220-1206A0DM078B2
A0	2021.12.14	/	新版发行	X.XXX ±0.10	SHEET	1/1	CHECK		TITLE:	2.0排针 2*6P L=7.8/6.5(0)/3.5 SMT 带柱 Φ1.0*1.35 LCP料 镀普金 CAP+600/卷
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	Angle ±3°	PROJ.	APPROVE			Customer No.	
				DIM TOL						