

Specifications





备注 (Remark)
 1. 材料 (MATERIAL)
 胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.
 Housing: PA6T+30%G.F UL94V-0, Color: Black
 四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN
 Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
 30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):
 额定电流: 2 AMP
 Rating Current: 2 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V/分钟.
 Withstanding Voltage: AC 500V/Minute.
 温度范围: -40° C to +105° C
 Temperature Range: -40° C to +105° C

Ordering Information

P220-22 06 A0 B U 280 A 1

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Contact Plating		INSULATOR MATERIAL	LENGTH OF TERMINAL	PACKING
20: 2.0mm	2-40P	Full Gold	Semi-gold	B: PA6T C: PA9T D: LCP		A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray
		A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	B0=0.8u" B1=1u" B2=1.5u" B3=2u" B4=3u" B5=5u" B6=10u" B7=15u" B8=20u" B9=30u"			
		S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature				

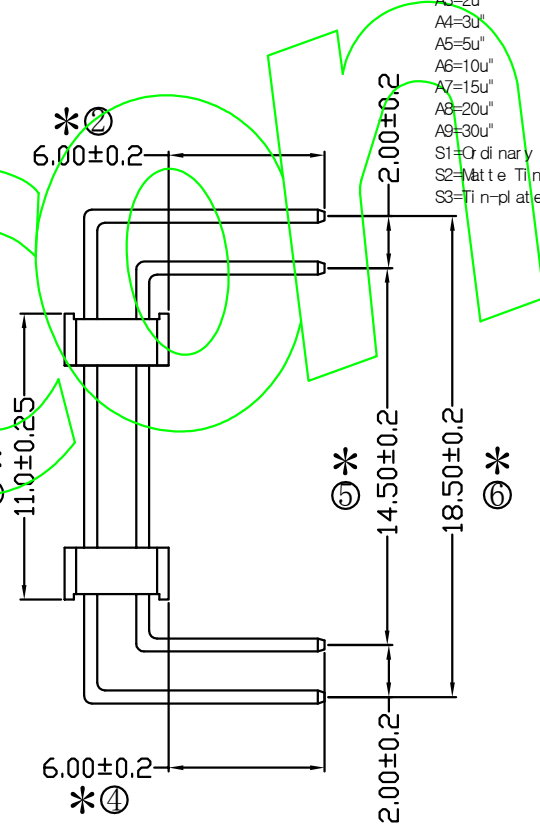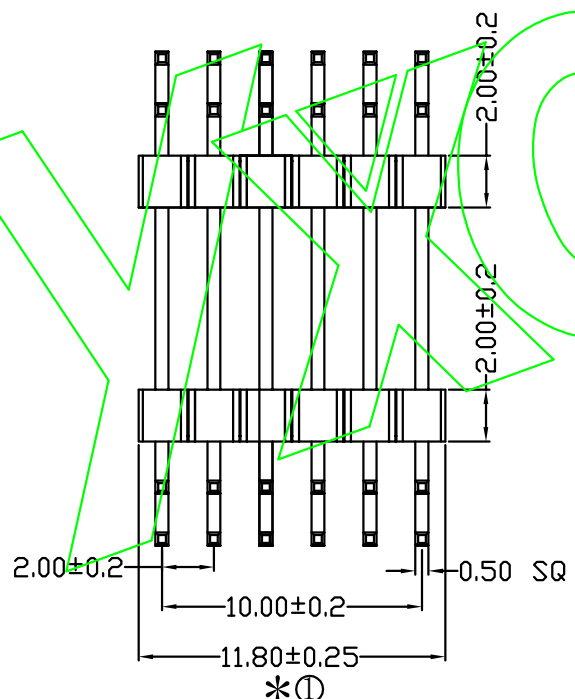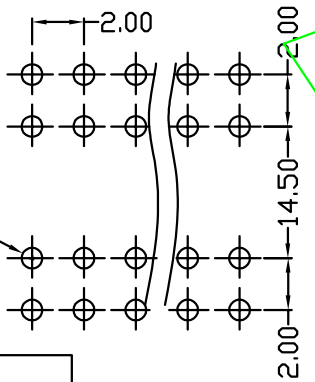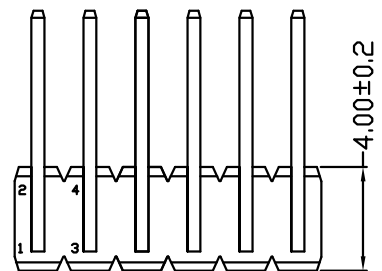

RoHS COMPLIANT

客编:
 1. 带*为品质重点检验尺寸
 2. 两塑反向

注意事项

			OPERATION		SCALE		Fit		Yxcon 东莞市宇熙精密连接器有限公司		
			X.X	+0.25	UNIT		MM		www.yxcon.com Dongguan Yuxi Electronic Co., Ltd.		
			X.XX	+0.20	SIZE	A4	DESIGN	秦星宇 2020.09.02	PART NO.		P220-2206A0BU280A1
			X.XXX	+0.10	SHEET	1/1	CHECK		TITLE:		2.0排针 2*6P*2 L=28.0/6.0(1.5)/6.0(1.5)/36.0 桥型 两塑反向 短针脚距14.5 DIP:6.0 PA6T料 镀普金 100PCS/袋+盒装
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION			PROJ.	APPROVE			Customer No.	