

Specifications





备注 (Remark)
 1. 材料 (MATERIAL)
 胶芯: PA9T+30%G.F UL94V-0, 颜色: 黑色.
 Housing: PA9T+30%G.F UL94V-0, Color: Black
 四方针: 黄铜, 镍底30u"MIN, 表面镀普金
 Contact: Brass, GOLD PLATING OVER ALL
 30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):
 额定电流: 1 AMP
 Rating Current: 1 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V/分钟.
 Withstanding Voltage: AC 500V/Minute.
 温度范围: -40° C to +105° C
 Temperature Range: -40° C to +105° C

Ordering Information

P320-12 03 A0 C M 062 B 1

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Full of Gold	Contact Plating	INSULATOR MATERIAL	LENGTH OF TERMINAL	PACKING
16: 1.6mm	2-50P	A0=0.8u"	B=0.8U"	B: PA9T	A: PE Bag	
20: 2.0mm		A1=1u"	B1=1U"	C: PA9T	C: Tube	
25: 2.54mm		A2=1.5u"	B2=1.5U"	D: LCP	D: Tube+CAP	
		A3=2u"	B3=2U"		E: Tray	
		A4=3u"	B4=3U"			
		A5=5u"	B5=5U"			
		A6=10u"	B6=10U"			
		A7=15u"	B7=15U"			
		A8=20u"	B8=20U"			
		A9=30u"	B9=30U"			
		S1=Ordinary Tin Plated				
		S2=Matte Tin Plated				
		S3=Tin-plated High-temperature				

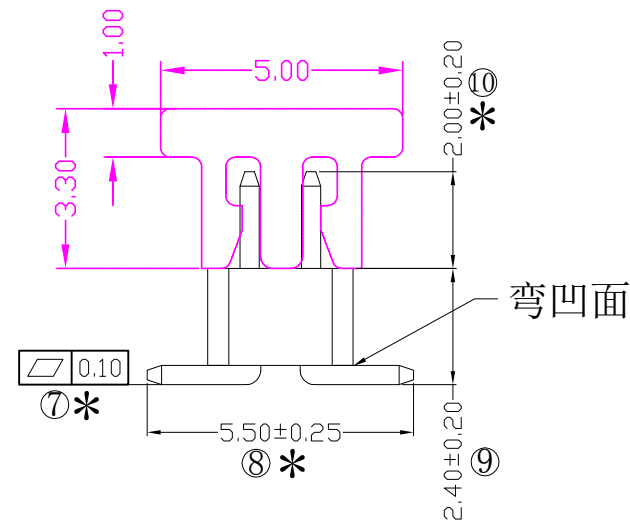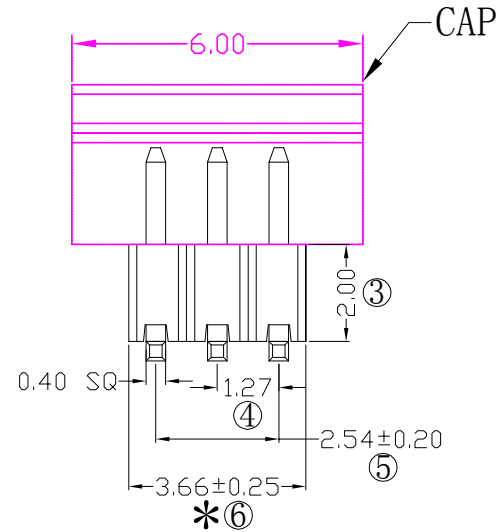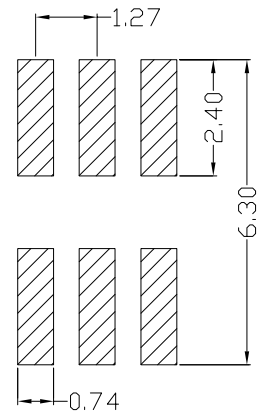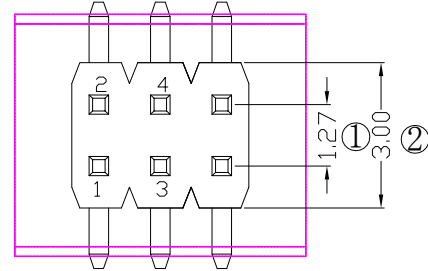

RoHS COMPLIANT

客编:
 1. 带*为品质重点检验尺寸
 2. 弯凹面

注意事项

			OPERATION	SCALE	Fit	Yxcon 东莞市宇熙精密连接器有限公司			
			X.X ±0.25	UNIT	MM	Dongguan Yuxi Electronic Co., Ltd.			
			X.XX ±0.20	SIZE	A4	DESIGN	刘伟 2021.05.05	PART NO.	P320-1203A0CM062B1
A0	2021.05.05	/	X.XXX ±0.10	SHEET	1/1	CHECK		TITLE:	1.27排针 2*3P L=6.2/5.5(0)/2.0 SMT 折凹面 H=2.0mm PA9T料 镀普金 CAP+900/卷
REV	DATE	SYMBOL	DI M TOL	PRQJ.	APPROVE			Customer No.	