

Low I_q Supply Voltage Supervisory in SOT23

FEATURES

- Operating Supply Voltage: 1.0V to 5.5V
- ±2% Reset Threshold Accuracy
- Low Quiescent current: 15µA (typically)
- Push-Pull Active Low $\overline{\text{RESET}}$ output
- 200ms Power-On Reset Delay
- Reset Output Drive Current: 3mA
- 3-Pin SOT23 Package

APPLICATIONS

- Digital Set Top Boxes
- TV
- Portable Device
- Microprocessor Systems

GENERAL DESCRIPTION

The TMI6809 series device are low I_q supply voltage supervisory that monitors a single voltage used in microprocessor and digital control system. The TMI6809 provide an active low reset signal while the VCC supply voltage drops below the reset threshold voltage. When the VCC supply voltage rises above the threshold voltage plus hysteresis the reset output goes high after 200ms (typical) reset delay time.

TMI6809 series are available suitable for monitoring 3V, 3.3V and 5V supply voltages. The low supply current of typical 10µA makes TMI6809 series devices ideal for using in portable, battery powered system applications, and they are available in 3-pin SOT23 package.

TYPICAL APPLICATION


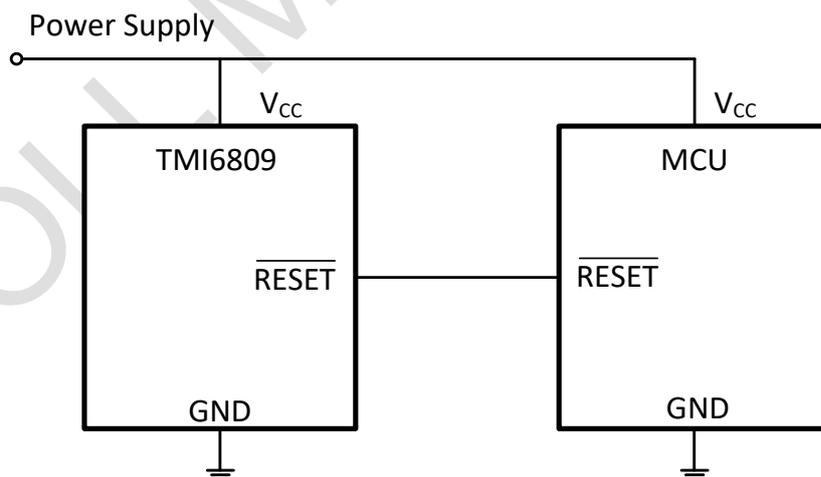


Figure 1. Typical Application Circuits

ABSOLUTE MAXIMUM RATINGS (Note 1)

Parameter	Value	Unit
Input Supply Voltage	-0.3~6	V
RESET Voltage	-0.3~6	V
Storage Temperature Range	-50~150	°C
Junction Temperature <small>(Note2)</small>	-40~150	°C
Power Dissipation	300	mW

PACKAGE/ORDER INFORMATION

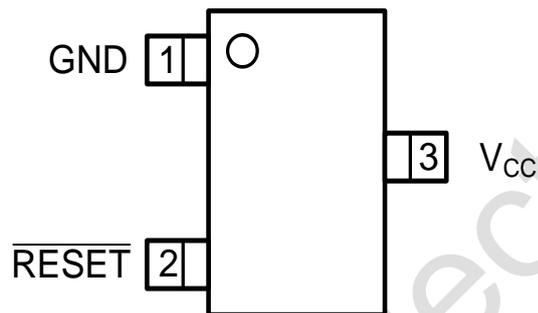

SOT23

Top Mark: TxxXXX (Txx: Device Code, XXX: Inside Code)

Part Number	Reset Threshold	Package	Top mark	Quantity/ Reel
TMI6809-263	2.63V	SOT23	T6RXXX	3000
TMI6809-293	2.93V	SOT23	T9SXXX	3000
TMI6809-308	3.08V	SOT23	T0TXXX	3000
TMI6809-400	4.00V	SOT23	T0JXXX	3000
TMI6809-438	4.38V	SOT23	T3MXXX	3000
TMI6809-463	4.63V	SOT23	T6LXXX	3000

TMI6809 series devices are Pb-free and RoHS compliant.

PIN FUNCTIONS

Pin	Name	Function
1	GND	Ground Pin.
2	$\overline{\text{RESET}}$	Active low reset output pin.
3	V _{CC}	Power supply voltage that is monitored.

ESD RATING

Items	Description	Value	Unit
V _{ESD}	Human Body Model for all pins	±2000	V

JEDEC specification JS-001
RECOMMENDED OPERATING CONDITIONS

Items	Description	Min	Max	Unit
Voltage Range	V _{CC}	1.0	5.5	V
T _J	Operating Junction Temperature Range	-40	125	°C

ELECTRICAL CHARACTERISTICS

(1.0V < V_{IN} < 5.5V, T_A = 25°C, unless otherwise noted.)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Input Voltage Range	V _{IN}		1.0		5.5	V
Input Supply Quiescent Current	I _q			15		μA
$\overline{\text{RESET}}$ Voltage Threshold	V _{TH}	TMI6809-263	2.58	2.63	2.68	V
		TMI6809-293	2.87	2.93	2.98	V
		TMI6809-308	3.02	3.08	3.14	V
		TMI6809-400	3.92	4.00	4.08	V
		TMI6809-438	4.29	4.38	4.46	V
		TMI6809-463	4.54	4.63	4.72	V
$\overline{\text{RESET}}$ Voltage Threshold Temperature Coefficient				30		ppm/°C
V _{CC} to $\overline{\text{RESET}}$ Delay Time	T _{PD_VCC}	V _{CC} =V _{TH} to V _{TH} -100mV		20		μs
$\overline{\text{RESET}}$ Delay Time	T _D			200		ms

Note 1: Absolute Maximum Ratings are those values beyond which the life of a device may be impaired.

Note 2: T_J is calculated from the ambient temperature T_A and power dissipation P_D according to the following formula: T_J = T_A + (P_D) × θ_{JA}.

FUNCTIONAL BLOCK DIAGRAM

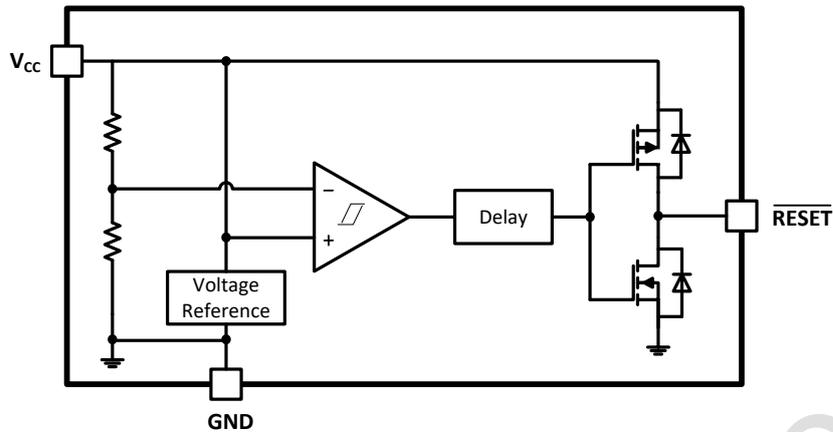


Figure 2. TMI6809 Block Diagram

V_{CC} $\overline{\text{RESET}}$ TIMING


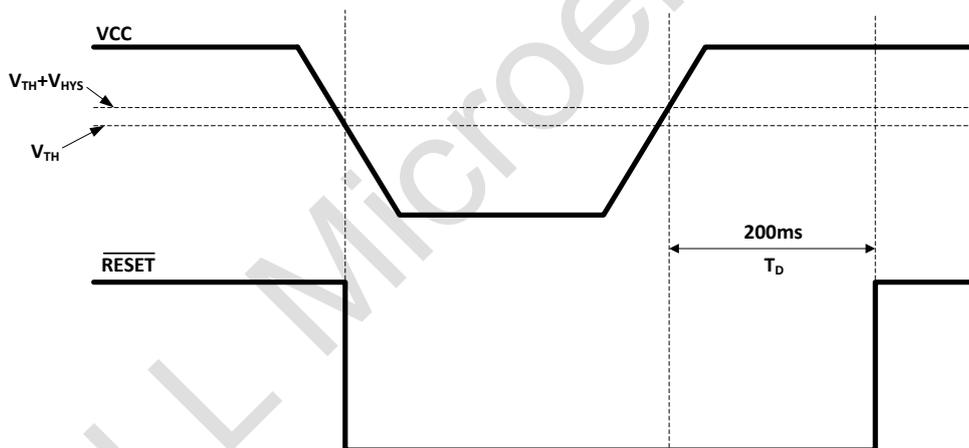


Figure 3. TMI6809 VCC Reset Timing

PACKAGE INFORMATION

SOT23

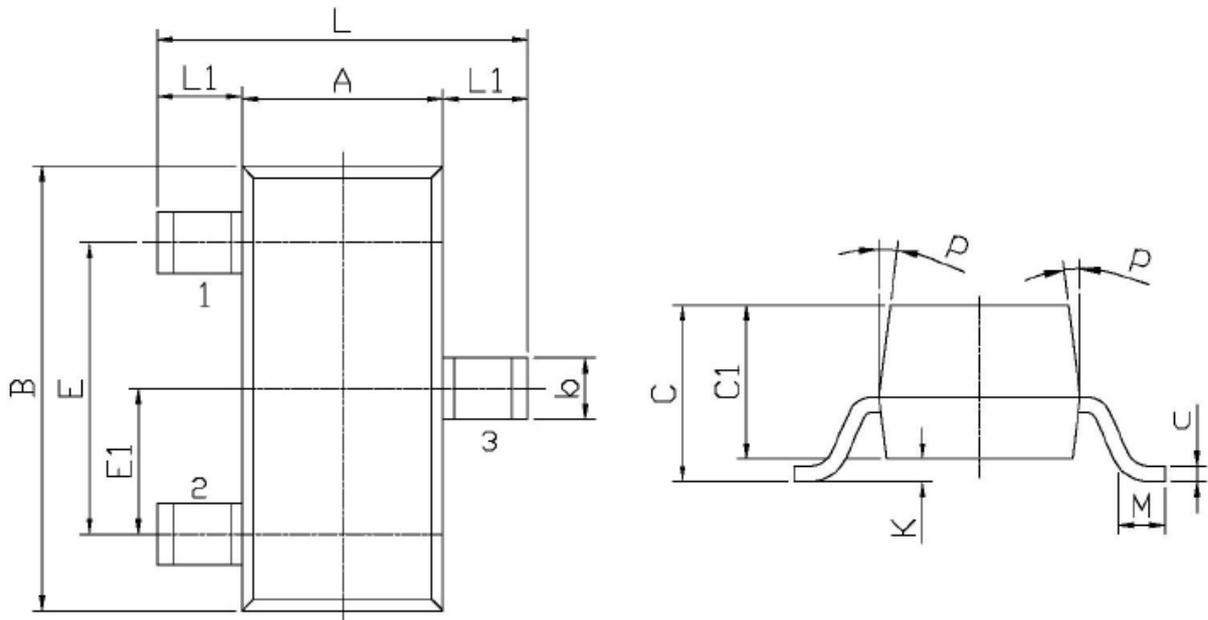

Unit: mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
L	2.2	2.7	C	1.30 MAX	
L1	0.45	0.65	C1	0.90	1.20
A	1.15	1.50	c	0.05	0.20
B	2.70	3.10	K	0	0.10
E	1.70	2.10	M	0.20 MIN	
E1	0.85	1.05	P	7°	
b	0.35	0.55			

Note:

- 1) All dimensions are in millimeters.
- 2) Package length does not include mold flash, protrusion or gate burr.
- 3) Package width does not include inter lead flash or protrusion.
- 4) Lead popularity (bottom of leads after forming) shall be 0.10 millimeters max.