


1.25 ± 0.10



A ± 0.20

Circuit 1

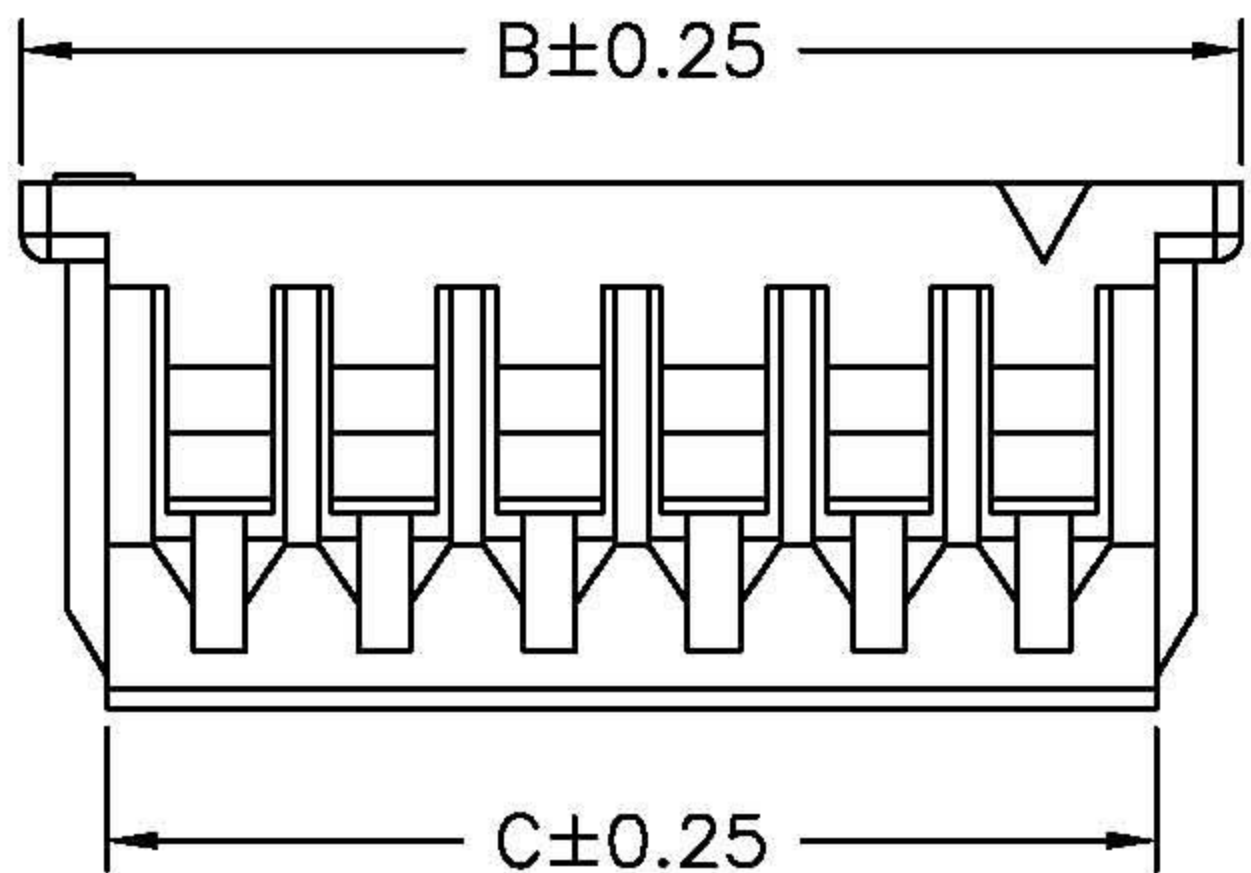

B ± 0.25

C ± 0.25

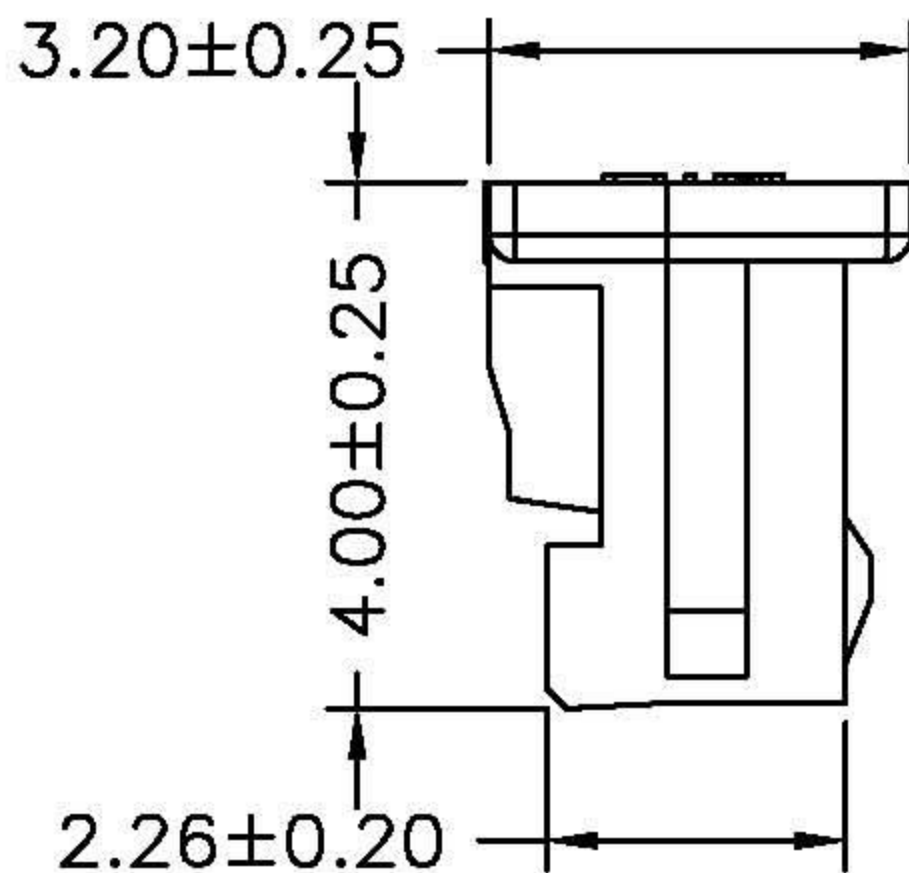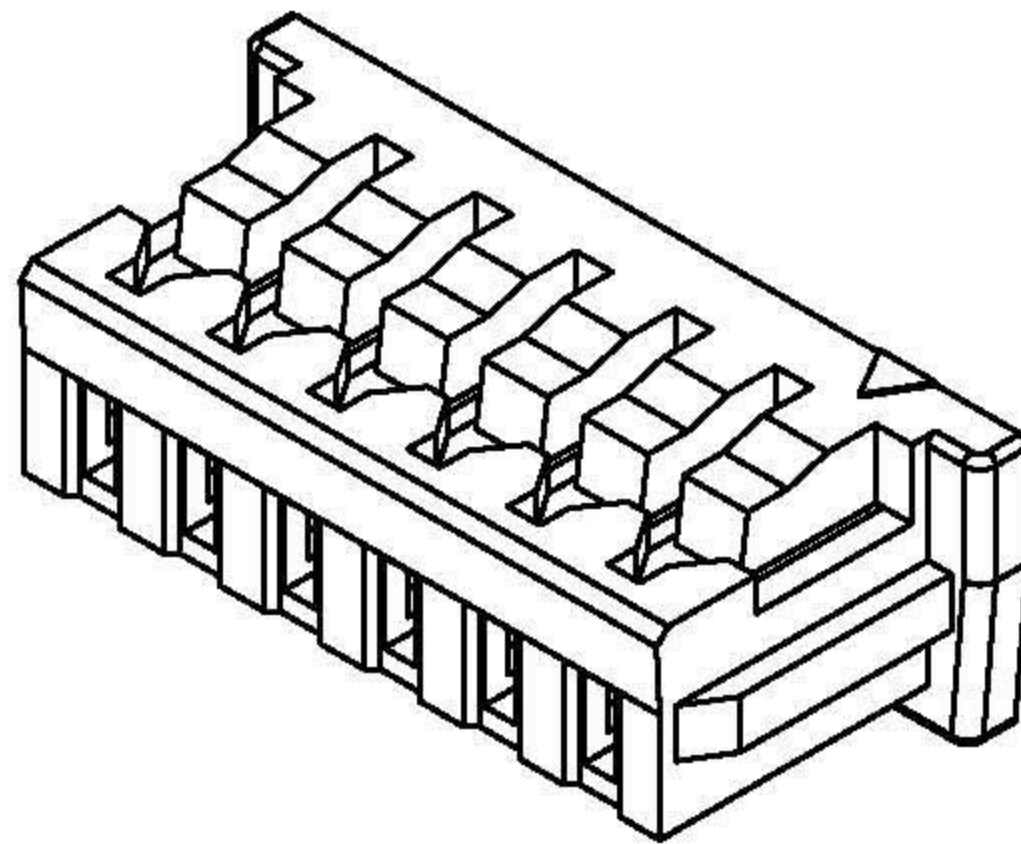

3.20 ± 0.25

4.00 ± 0.25

2.26 ± 0.20

SPECIFICATIONS

Current Rating: 1A AC,DC
 Voltage Rating: 125V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Material: Nylon 66,UL94V-0
 Color: White or Black

Circuit No.	Dimensions			Circuit No.	Dimensions		
	A	B	C		A	B	C
02P	1.25	4.25	2.95	12P	13.75	16.75	15.45
03P	2.50	5.50	4.20	13P	15.00	18.00	16.70
04P	3.75	6.75	5.45	14P	16.25	19.25	17.95
05P	5.00	8.00	6.70	15P	17.50	20.50	19.20
06P	6.25	9.25	7.95	16P	18.75	21.75	20.45
07P	7.50	10.50	9.20	17P	20.00	23.00	21.70
08P	8.75	11.75	10.45	18P	21.25	24.25	22.95
09P	10.00	13.00	11.70	19P	22.50	25.50	24.20
10P	11.25	14.25	12.95	19P	22.50	25.50	24.20
11P	12.50	15.50	14.20	20P	23.75	26.75	25.45

祺华电子科技有限公司
 QI HUA HI-TECH ELECTRICAL CO., LTD.

UNIT: mm
 SCALE: 1 : 1
 SHEET: 1 of 1

DRAWN BY: 歐陽小強
 2008.09.02
 APPROVED BY: 謝瑞清
 2008.09.02

GENERAL TOLERANCE
 X, X±0.25
 X, XX±0.15
 X, XXX±0.05

TITLE:
1.25mm PITCH HOUSING
 DRAW NO.: A1250H-XXP
 REV. A3

REV.	DESCRIPTION	DATE	NAME
A3	EN1107040251	2011.07.01	陳錦展
A2	EN1011230289	2010.11.26	陳錦展