
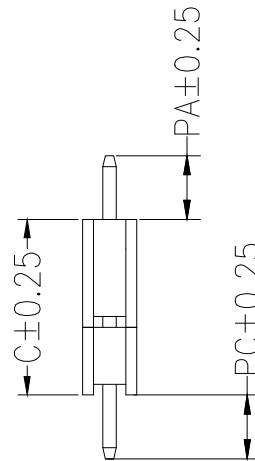
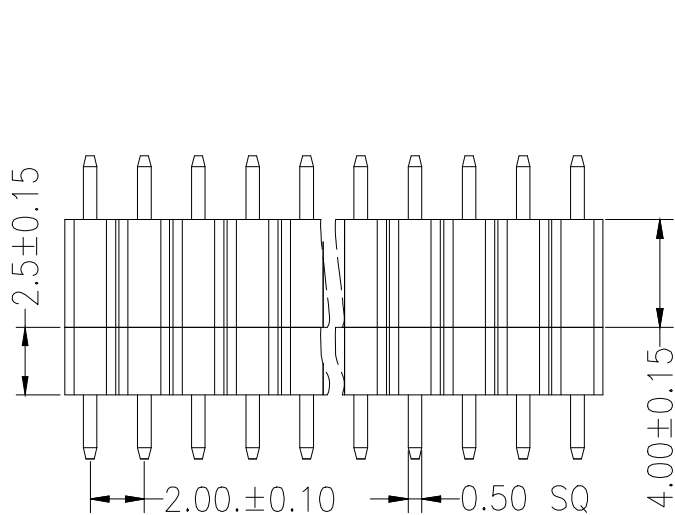
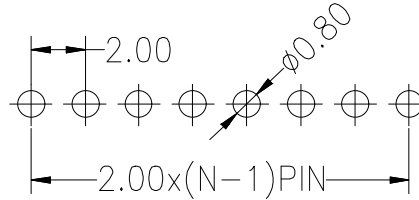


Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

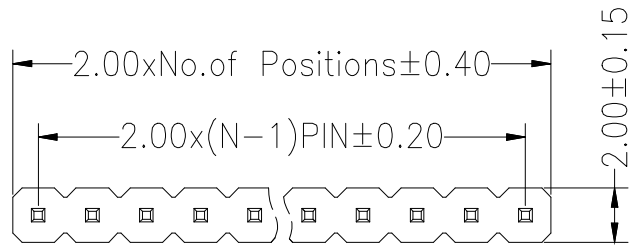

SPECIFICATIONS

Rated Current: 2.0AMP  
Contact Resistance: 20mΩ Max  
Withstand Voltage: 500V AC/DC  
Insulation Resistance: 1000MΩ Min  
Operation Temperature: -40°C to +105°C

Contact Material: Brass  
Contact Plating: Au or Sn Over Ni  
Insulator Material: Polyester(UL94V-0)  
Resistance To Soldering Heat:  
245°C±5°C. 10s(PBT insulator)  
260°C±5°C. 10s(PA6T&PA9T&LCP insulator)

Dimension antitheses list				
ITEM	PA	PC	C	L
Standard	2.35	2.35	6.50	11.20
Alternate				

**Ordering Information**

PM 200 - \* - N - Z - C\* - \*\* - DP

No. of Rows 1=Single Row 2=Dual Row	No. of Pins 1-40Pin	Type R=直排 S=双排 RS=斜插	Length (塑高)	Contact G0:Gold G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin	Plating Flash Gold Gold Gold Gold Gold Gold Gold Flash/Tin	Double Plastic (双塑)
---	------------------------	-------------------------------	----------------	--	---	---------------------------

			GENERAL TOLERANCE DIM TOL X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	制图 DRAWING 审核 CHECK 批准 APPROVAL 比例 SCALE 投影 Projection		<b>深圳市华灿天禄电子有限公司</b> ShenzhenhuaciantianluELECTRONICS CO., LTD	产品名称 TITLE 2.00单排 双塑 直排针 版本号 REV. A	产品料号 PART NO. PZ200-1-N-Z-C6.5-XX-DP(L11.2) 单位 UNITS mm	材料 MATERIAL 页次 SHEET 1/1	
1	初版发行	日期	MODIFY DATE	1	变更内容	MODIFY CONTENT	2	3	4	5