
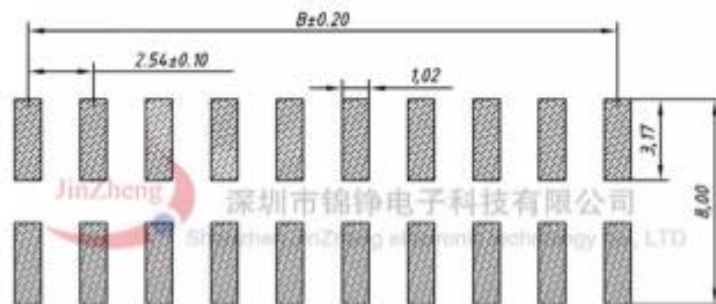
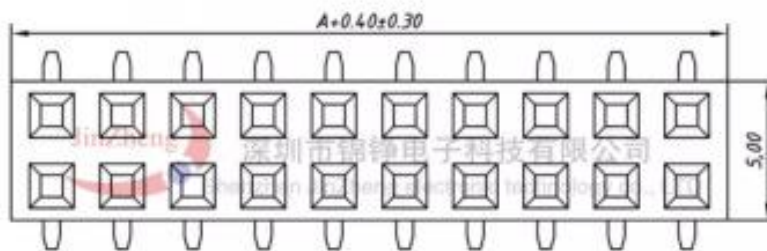
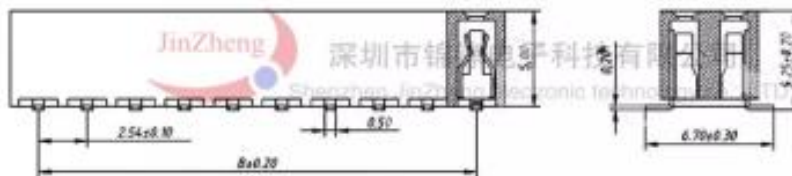


POSITION DIMENSION	02 Thru 40
A	2.54 * NO. of Positions (Per row)
B	2.54 * NO. of Position(Per row)-2.54

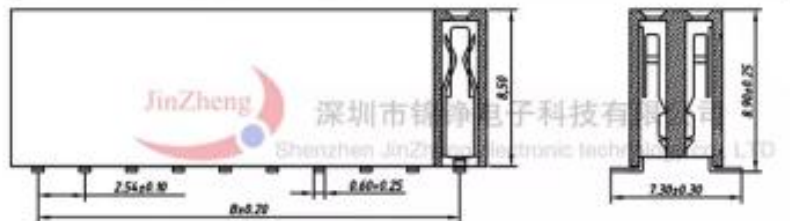

#### P.C.B LAYOUT

#### 1. SPECIFICATION

Current Rating	:	3.0 Amps
Contact Resistance	:	20 Millionohms MAX
Insulator Resistance	:	1000 Megohms MIN
Dielectric Withstanding	:	500V AC/minute
Operating Temperature	:	-40° C~+105° C

#### 2. MATERIALS

CONTACT Material	:	Brass
Contact Plating	:	G/F or Tin over 30u" Ni
Insulator Material	:	PA6T BK (UL-94V-0)
Wedding Temperature	:	235° C for 60 seconds 255° C for 3-5 second