
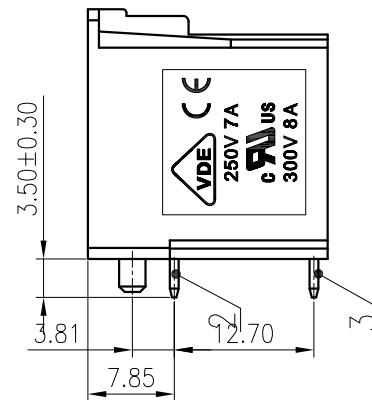
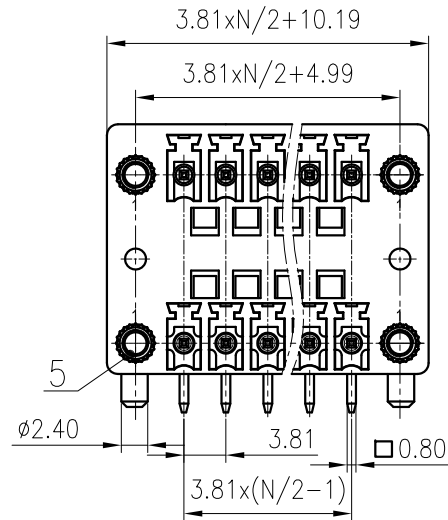
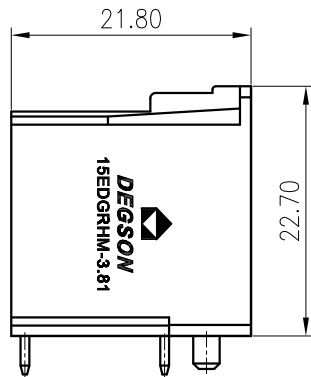


未注公差/General tolerances(mm)													0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50
													±2°

PCB LAYOUT

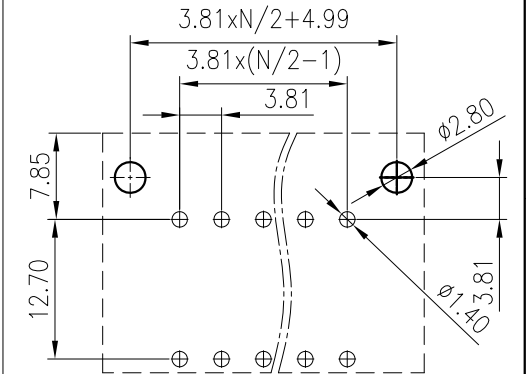

5	Nut	Copper Alloy	M2.5
4	Cover	PA66	UL94V-0
3	Pin 2	Copper Alloy	Sn Plated
2	Pin 1	Copper Alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:		B
额定电压/电流/Rated Voltage(V)/Current(A)		300/8
IEC 标准/IEC Standard:		
过压类别/Overvoltage Category/污染等级/Pollution Degree		II/2
额定电压/电流/Rated Voltage(V)/Current(A)		250/7
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		2.5
间距/Pitch(mm)/线数范围/Poles		3.81/N=04~48P
使用温度范围/Operating temperature(°C)		-40~+105
符合RoHS环保要求/Conform to RoHS		Yes

MATERIAL:		SURFACE:	
MAT NO.: /		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS: /			
APPD: Lan ChH 2020.05.25		NAME: 15EDGRHM-3.81-XXP-1Y-00A(H)	
CHKD: Yu JZh 2020.05.25			
DRFT: ZL 2015.11.13		DRAWING NO.: 15EDGRHM-3.81-C01	
		REV	
		T1	
	SIZE: A4		TYPE: CUSTOMER DRAWING
		SCALE: 1.5:1	SHEET
		1/1	