
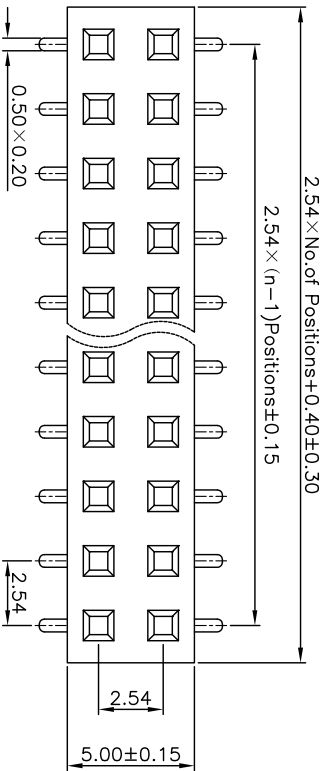
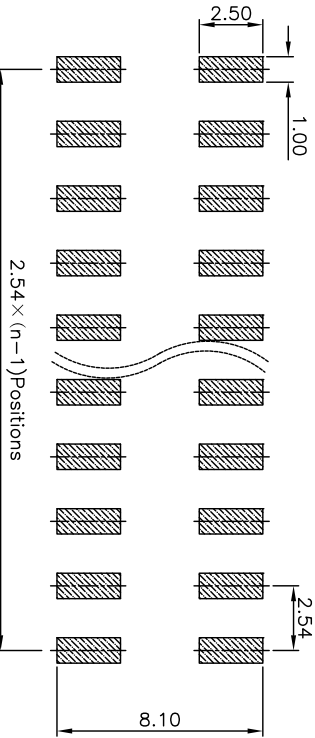


SPECIFICATIONS

Rated Current : 3.0AMP
Contact Resistance : 20mΩ Max
Withstand Voltage : 1000V AC
Insulation Resistance : 1000MΩ Min
Operation Temperature : -40°C to +108°C

Contact Material : Brass
Contact Plating : Au or Sn Over Ni
Insulator Material : Polyester(UL94V-0)
Standard : PA6T
Max Processing Temp : 230°C for 5-10 seconds

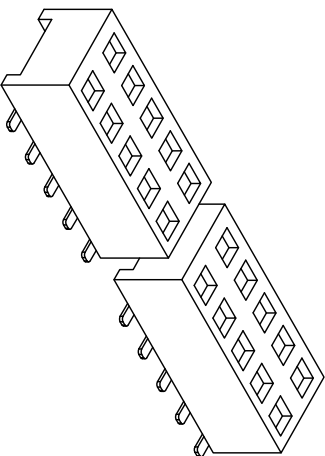

P.C.B LAYOUT

MODEL: F2.54S-3.55x5.0U-2xnp	DRAWN BY : Leiqin	DATE:	GENERAL TOLERANCE: (UNLESS SPECIFIED)
TITLE : 2.54间距3.55高双排U型贴片排母	CHECKED BY : Liwei	DATE:	X. ±0.30mm X.* ± 3°
DRAWING NO:	REV. : A	DATE:	X.X ±0.25mm X.X* ± 2°
SHEET: 1 OF 1	APPROVED BY: Wuxin	DATE:	X.XX ±0.20mm X.XX* ± 1°
SCALE: 3:1	SIZE: A4	UNIT : mm	X.XXX±0.10mm X.XXX ± 0.5°



深圳市吉威电子有限公司
SZJUSTWELL ELECTRONICS CO., LTD

NO:	PARTICULAR	BY	DATE
REVISIONS			