

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in writing. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、集成电路布图设计专有权、商业秘密等权利外，其他一切权利均归本公司所有。未经许可，不得复制或传播。

FOR-1755 Rev.1.7

2

3






4

5

6


未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
3	6	10	18	30	50	80	120	180	250	315	400	500	>500	±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

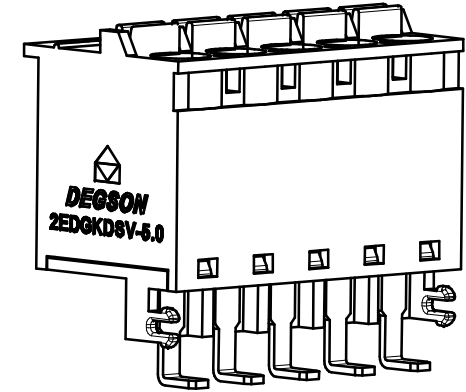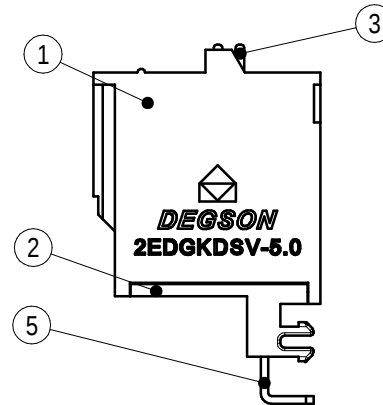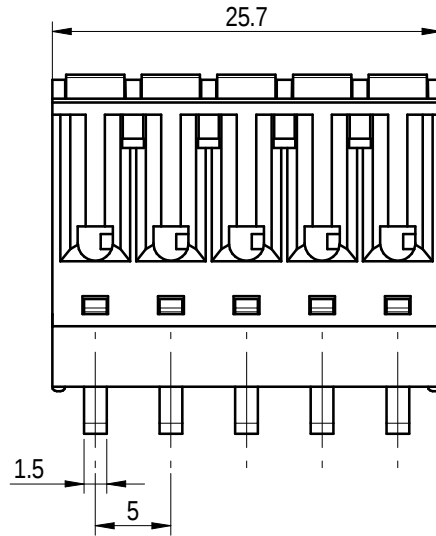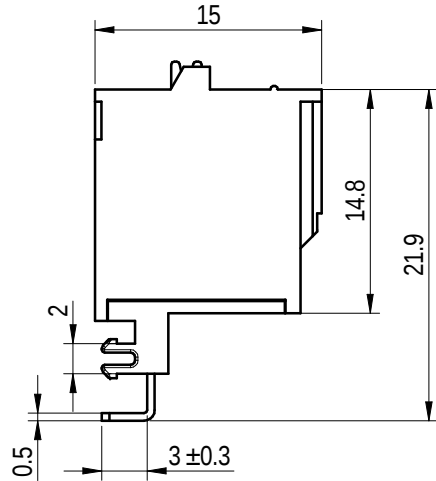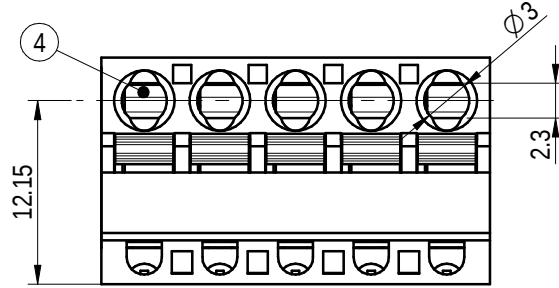

5	Pin-header	Copper	Sn Plated
4	Spring	Steel	/
3	Button	PA66	UL94 V-0
2	Cover	PA66	UL94 V-0
1	Housing	PA66	UL94 V-0
ITEM	NAME OF PART	MATERIAL	NOTES

PCB LAYOUT

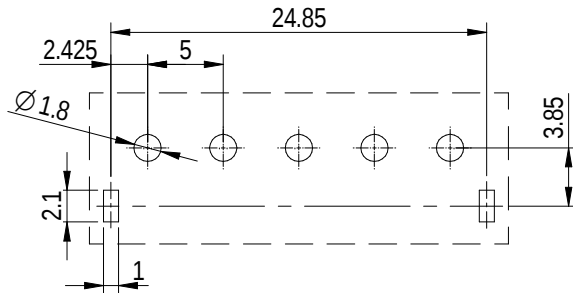

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/10	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	320/20	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	4	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	26~12 / 0.2~2.5		
间距/Pitch(mm)/线数范围/Poles	5.0/N=05P		
剥线长度/Stripping length(mm)	9~10		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	/		

			MATERIAL:		SURFACE/COLOR:				
			MAT NO./REV: 30060000140-1 / 00		MAT STATUS: 新物料				
APPD: 李根芳		2023.03.01		NAME DF800-001-05P-C1-00Z (H)					
CHKD: 马恩开		2023.03.01							
DRFT: 马恩开		2023.03.01							
DRAWING NO.		200124412		TYPE		DRAWING STATUS		SCALE	SHEET
 A4				CUSTOMER DRAWING		work		2:1	1/1