
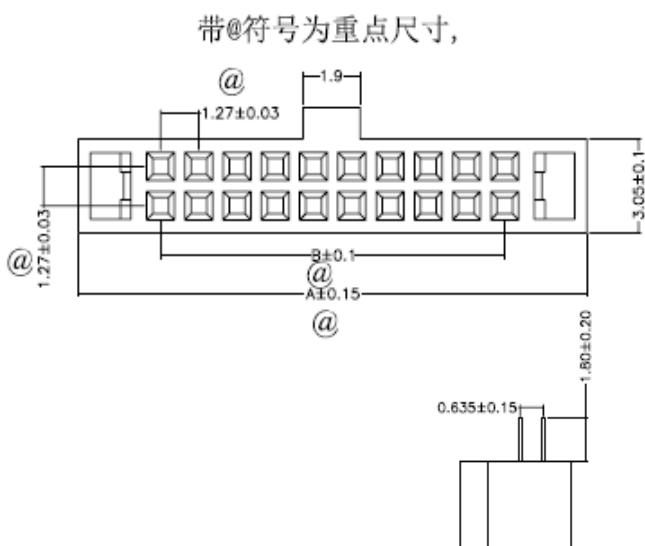
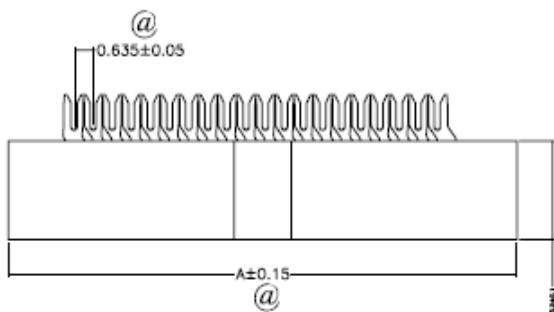
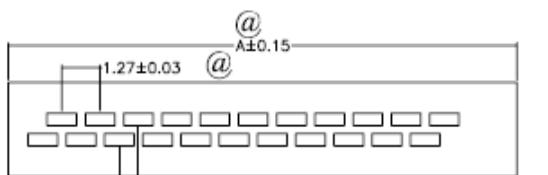
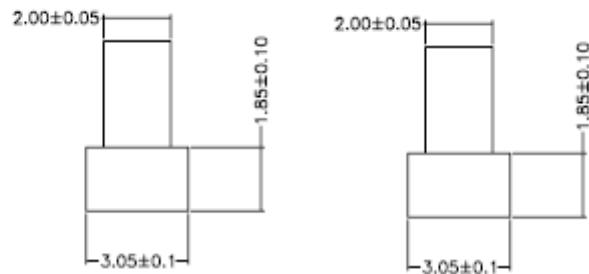


项 次	日 期	订正记事	单位: mm

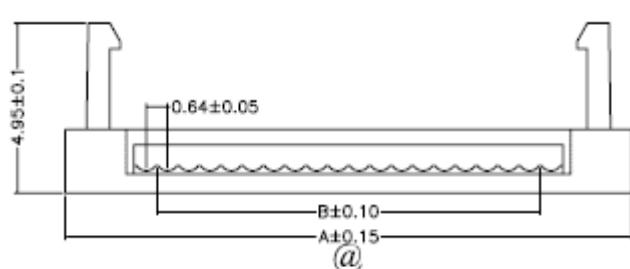

Pin Q'TY	Dlm A	Dlm B	Pin Q'TY	Dlm A	Dlm B
10P	10.54	5.08	40P	29.59	24.13
12P	11.81	6.35	44P	32.13	26.67
14P	13.08	7.62	50P	35.94	30.48
16P	14.35	8.89	60P	42.29	36.83
20P	16.89	11.43	68P	47.37	41.91
26P	20.70	15.24	80P	54.99	49.53
30P	23.24	17.78	100P	67.69	62.23
34P	25.78	20.32			

MATERIAL&FINISH

Insulator: PA66 -VG15(FG3320)

Contact : Phosphor bronze

Contact : Gold-Plated Over Nickel.

Temperature Range:-40° C To+105° C

SPECIFICATIONS

Current Rating :1A AC,DC

Voltage Rating : 250V AC,DC

Contact Resistance:20mΩ Min

Insulation Resistance:1000MΩ Min

Withstanding Voltage:500V AC/Min

项 次	材料名称	材 料 规 格 、 编 号		数 量	备 注
①	IDC	FC-10P 黑色三件式 间距2.54		1	
图 号	K-4649-A		客 户	华创恒达	
制作日期	21/Aug/23			深圳市凯沃斯 科技有限公司	
批 准	审 核	制 图	料 号		
		陈明山			