
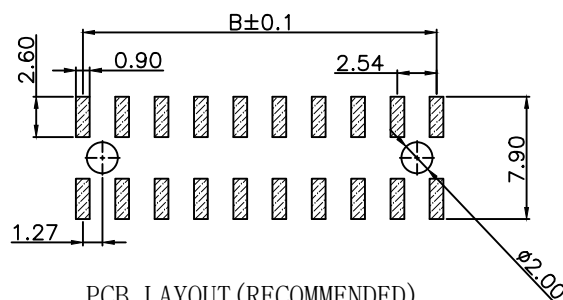

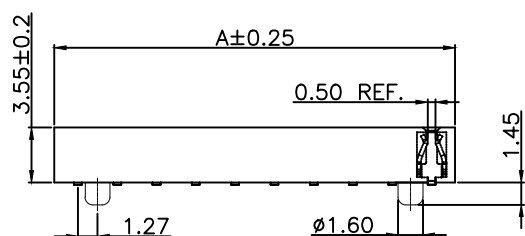


RoHS Compliant Customer Drawing

No.	A	B
2*03	8.12	5.08
2*04	10.66	7.62
2*05	13.20	10.16
2*06	15.74	12.70
2*07	18.28	15.24
2*08	20.82	17.78
2*09	23.36	20.32
2*10	25.90	22.86
2*11	28.44	25.40
2*12	30.98	27.94
2*13	33.52	30.48
2*14	36.06	33.02
2*15	38.60	35.56
2*16	41.14	38.10
2*17	43.68	40.64
2*18	46.22	43.18
2*19	48.76	45.72
2*20	51.30	48.26
2*21	53.84	50.80
2*22	56.38	53.34
2*23	58.92	55.88
2*24	61.46	58.42
2*25	64.00	60.96
2*26	66.54	63.50
2*27	69.08	66.04
2*28	71.62	68.58
2*29	74.16	71.12
2*30	76.70	73.66
2*31	79.24	76.20
2*32	81.78	78.74

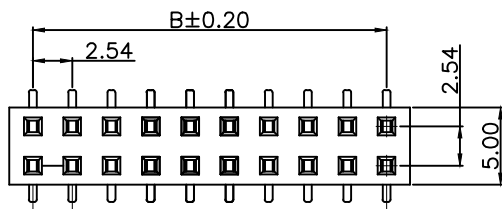

PCB LAYOUT (RECOMMENDED)
(TOP VIEW TOL. : ±0.05)

Specifications:

Current Rating:3.0 Amp
Contact resistance:20mΩ Max
Insulator resistance:1000MΩ min.
Withstanding Voltage:1000V AC Minute
Operating Temperature Range:−40°~+105°C
Max Processing Temp: 230° for 30~60 seconds
(260° for 10 seconds)

Material And Finish

Insulator:Polyester,(PA6T UL94V-0)
Contact:Phosphor Bronze/Brass
Contact Plated:Full Gold,Full Tin,
Selective plated

Ordering information

F5355C50-2XX XX P XX X S 73 U
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series NO.
- ② No. of Positions:
2*40=240
- ③ Contact Plated
GF=Gold Flash
G1=Gold 1u"
G2=Gold 2u"
G3=Gold 3u"
T1=Tin
- ④ Contact Option:
P=No Distribution
- ⑤ Plastic Material:
33=PA6T(Black)
13=PBT(Black)
43=PA9T(Black)
- ⑥ Packing Type:
A=In Tube
E=In Tray
- ⑦ Contact Option:s=With convex
- ⑧ Contact Length:73=(W) 7.3
- ⑨ Type Option: U=U Type

序号(No.)	版本(Rev.)	修改说明(Description)	日期(Date)	设计(Design)
修改记录(Revision Record)				


KONNRA

深圳市康瑞精密组件有限公司

ShenZhen Konnra Precision Components Co.,Ltd.

第三视角投影

THIRD ANGLE
PROJECTION



未注公差
UNLESS OTHERWISE
SPECIFIED TOLERANCE

线性 (LINER) 角度 (ANGLES)

x ± --	x' ± 1'
.x ± 0.25	.x' ± --
.xx ± 0.20	.xx' ± --
.xxx ± 0.15	.xxx' ± --

品名 (TITLE):

PH2.54*3.55/SMT/双排排母/U端

绘图 (DRAWING)

Jack

审核 (CHECK)

zhangsong

核准 (APPROVED)

Alan Zhang

日期 (DATE)

料号(PART NO.): F5355C50-2XXXXPXXS73U

图号(DWG NO.):

比例(SCALE): 1:1

单位(UNIT): MM

版本(Rev.): AO 页数(SHEET): 10F1

A4