


# THROUGH-HOLE LOW-PROFILE HEADER

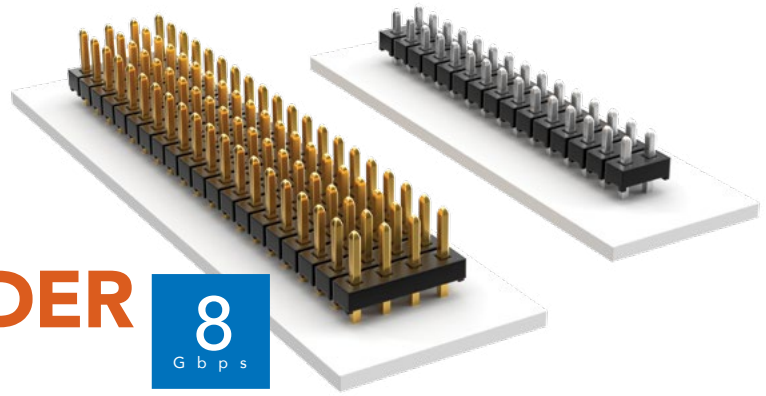

(2.00 mm) .0787" PITCH • TMM SERIES

## TMM

**Board Mates:**  
CLT, SQT, SQW, ESQT,  
TLE, SMM, MMS

**Cable Mates:**  
TCSD


## SPECIFICATIONS

**Insulator Material:**  
Black Liquid Crystal Polymer  
**Terminal Material:**  
Phosphor Bronze  
**Plating:**  
Sn or Au over  
50 μ" (1.27 μm) Ni  
**Current Rating (SMM/TMM):**  
3.2 A per row  
(2 pins powered)  
**Operating Temp Range:**  
-55 °C to +105 °C with Tin;  
-55 °C to +125 °C with Gold  
**Voltage Rating:**  
281 VAC mated with SQW;  
250 VAC mated with SQT

## PROCESSING

**Lead-Free Solderable:**  
Yes

## APPLICATION



Retention Clip Option (-RC)

## ALSO AVAILABLE

Other plating  
(MOQ Required)



**Note:**  
Some lengths, styles and  
options are non-standard,  
non-returnable.

TMM	1	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	OTHER OPTION
-----	---	------------------	------------	----------------	------------	--------------

02 thru 50

Specify LEAD STYLE from chart

**-F**  
= Gold flash on post,  
Matte Tin on tail

**-L**  
= 10 μ" (0.25 μm)  
Gold on post,  
Matte Tin on tail

**-S**  
= 30 μ" (0.76 μm)  
Gold on post,  
Matte Tin on tail

**-T**  
= Matte Tin

**-S**  
= Single Row





**-D**  
= Double Row

**-Q**  
= Four Row




**-RA & -RE**  
= Right-angle (Lead Style -01 only)  
(2 positions minimum, -Q row)

**-RC**  
= Retention Clip (Mates with TCSD)  
(Double row only, 4 positions minimum, only available -06 lead style)

**-"XXX"**  
= Polarized Position  
(Specify position of omitted pin)

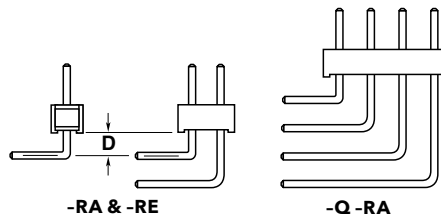

OPTION	D
-RA	(1.27) .050
-RE	(3.56) .140



LEAD STYLE	A	B	C
-01		(3.20) .126	(3.50) .138
-02	(8.20) .323	(3.70) .146	(3.00) .118
-03		(4.00) .158	(2.70) .106
-04	(5.69) .224	(1.91) .075	
-05	(5.43) .214	(1.65) .065	(2.29) .090
-06	(9.58) .377	(3.20) .126	(4.88) .192