


PCB LAYOUT

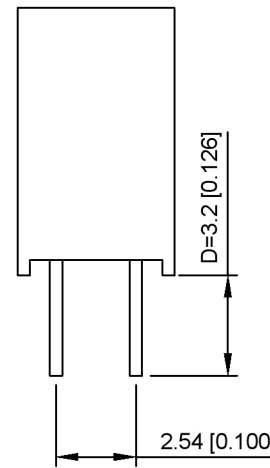

Specifications:
 规格:
 Voltage rating: 250V AC/DC
 额定电压: 250V AC/DC
 Current rating: 3A AC/DC
 额定电流: 3A AC/DC
 Withstanding voltage: 1000V AC/minute
 耐受电压: 1000V AC/分钟
 Temperature range: -40°C~+105°C
 温度范围: -40°C~+105°C
 Insulation resistance: ≥1000MΩ
 绝缘电阻: ≥1000MΩ
 Contact resistance: ≤20mΩ
 接触电阻: ≤20mΩ
 Material: PA6T UL94V-0
 材质: PA6T UL94V-0
 Plating Category: 1U"Gold
 镀层: 1U"Gold
 Wave soldering temperature: 255±5°C, 10S
 波峰焊温度: 255±5°C, 10S

X6521 F V - 2xXX - C85 D32
 ① ② ③ ④ ⑤ ⑥

1. Series No
2. Category: F-Female
3. Welding Board Angle: V-Stright 180°
4. Row No. Pin No: 2xXX-2x01~2x40P
5. Plastic Height: C=8.5mm
6. Pin Length: D=3.2mm

X6521FV-2xXX-C85D32	PA6T	Brass	X6521W
PART NO	Material	Material(Pin)	Suitable XKB Wafer

广东星坤科技股份有限公司

Δ定	日期
Δ改	日期
ΔX	日期

文件工程章

MARK	DESCRIPTION	DATE	REVISED	APPROVED	ANGLAR	±5°
					L ≤ 4	±0.2
					4 < L ≤ 16	±0.3
					16 < L ≤ 63	±0.4
					L > 63	±0.5

REVISIONS UNSPECIFIED TOLERANCES
 www.helloxkb.com www.helloxkb.cn www.xk-dg.cn



DSND	SCALE: N/A	MODEL TYPE: 2.54mm BTB Connector
DWN	VIEW:	PART NO.: X6521FV-2xXX-C85D32
CHKD	UNIT: mm/in	DWG NO.: X-X6521FV-2xXX-C85D32
APPD	SIZE: A4	WEIGHT SHEET REVISION 1/1 A0

XKB INDUSTRIAL PRECISION CO., LIMITED