

F

E

D

C

B

A

F

E





D

C

B

A

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
A	NEW	INTERIM INITIAL RELEASE.	2019.10.09	李全森
B		下针长度变更为2.1MM	2019.10.11	李全森

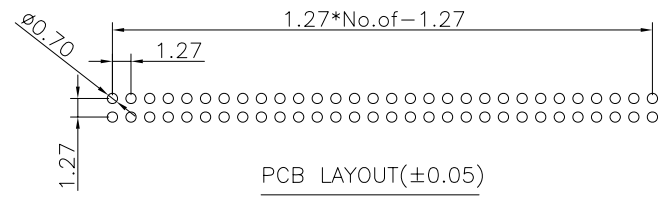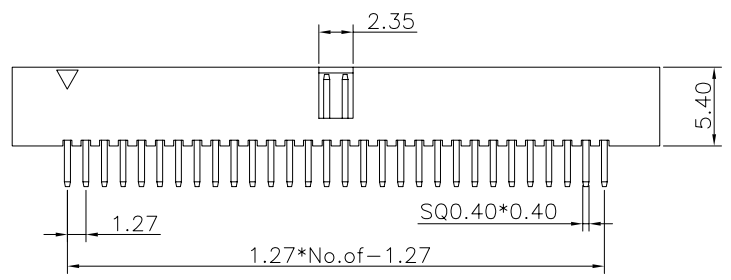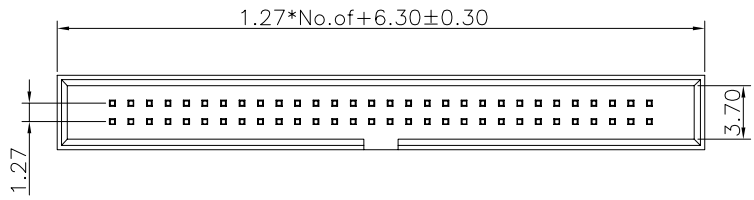

Specifications
Current Rating:1Amp
Insulation Resistance:1000MΩ Min.
Dielectric Withstanding Voltage:500VAC
Contact Resistance:20mΩ Max.
Operating Temperature:−40℃ to +105℃
Materials
Contact Material:Brass
Insulator Material:High Temperature
Thermoplastic, UL 94V-0 PA6T(Nylon) or
the equivalent material
All materials must meet GREENCONN
hazardous substances control standards.

Ordering Information

G PEA2A6 - XX XX A 001 B X Z X-1B
No. of Pins per Row 03~30 Standard Plating 02=Gold Flash Color 1=Black Standard Packing B=Tray

格稜股份有限公司 Greenconn Corporation					GENERAL TOLERANCE		DESIGNED: 李全榮	DATE: 2019.10.11	DWG. NO. GPEA2A6-CA1BZ	TITLE. PITCH 1.27mm BOX
					X.°±	X.±	CHECKED:	DATE:		
					.X°±	.X±0.30			PART NO. GPEA2A6-XXXXA001BXZX-1B	
					.XX°±	.XX±0.20	APPROVED:	DATE:		
REV. B	UNIT. mm	SCALE. 1:1	PAGE. 1/1		.XXX°±	.XXX±0.10				