


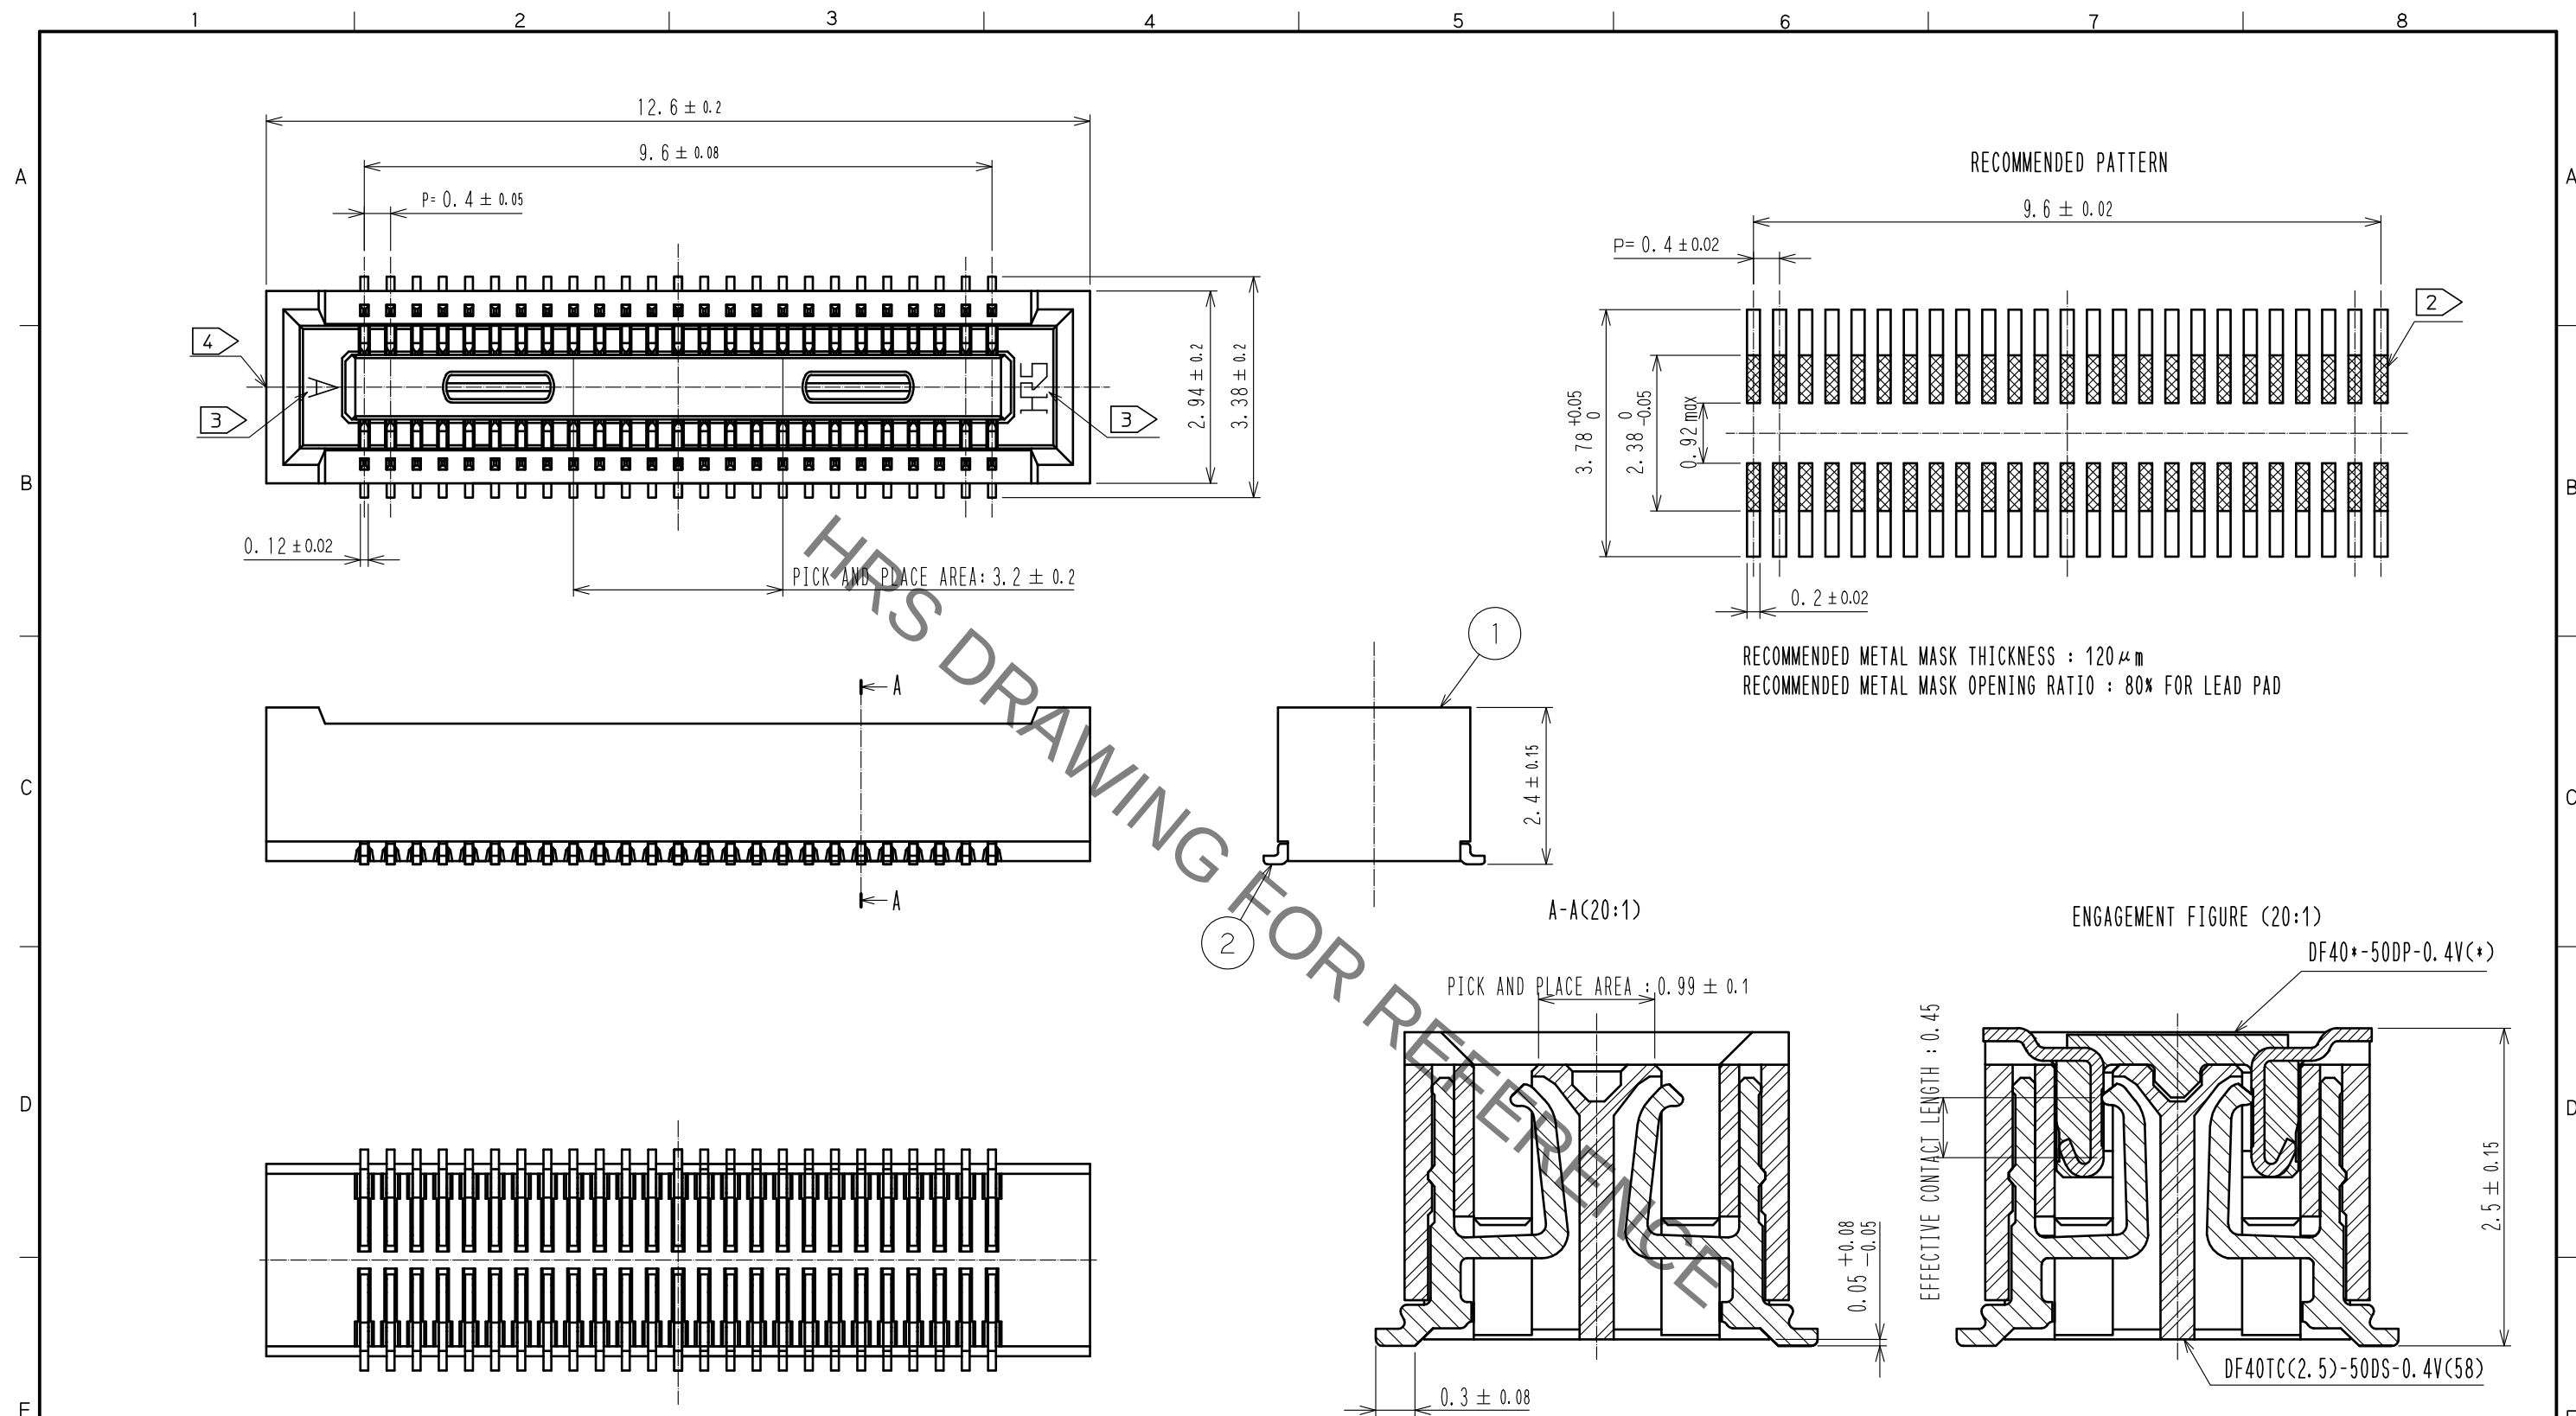

NOTE 1. ALL LEADS CO-PLANARITY SHALL BE 0.1 MAX.

2		IS NO PATTERN AREA OTHER THAN THE SAME CIRCUIT.
3		HRS MARK AND CAV NO. IS INDICATED IN APPROXI POSITION SHOWN.
4		GATE POSITION IS POSITIONED IN APPROXIMAL AREA SHOWN.

2	COPPER ALLOY	CONTACT AREA: GOLD 0.05μm MIN		5	PS	BLACK
		SMT LEAD: GOLD 0.05μm MIN				
		UNDERPLATING: NICKEL 1μm MIN				
1	LCP	BLACK, UL94V-0		3	PS	CLEAR, EMBOSSED CARRIER TAPE
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS


UNITS mm		SCALE 10 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE

 HIROSE ELECTRIC CO., LTD.	APPROVED : WR. FUKUCHI	20210402	DRAWING NO.	EDC-389547-58-00	
	CHECKED : TS. MIYAZAKI	20210402	PART NO.	DF40TCC(2.5)-50DS-0.4V(58)	
	DESIGNED : YK. SATAKE	20210402	CODE NO.	CL0684-4279-0-58	
	DRAWN : YK. SATAKE	20210402			
					1



Jan.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

EMBOSSED CARRIER TAPE PAACKAGING (5:1)


STYLE AND DIMENSION OF REEL (FREE)

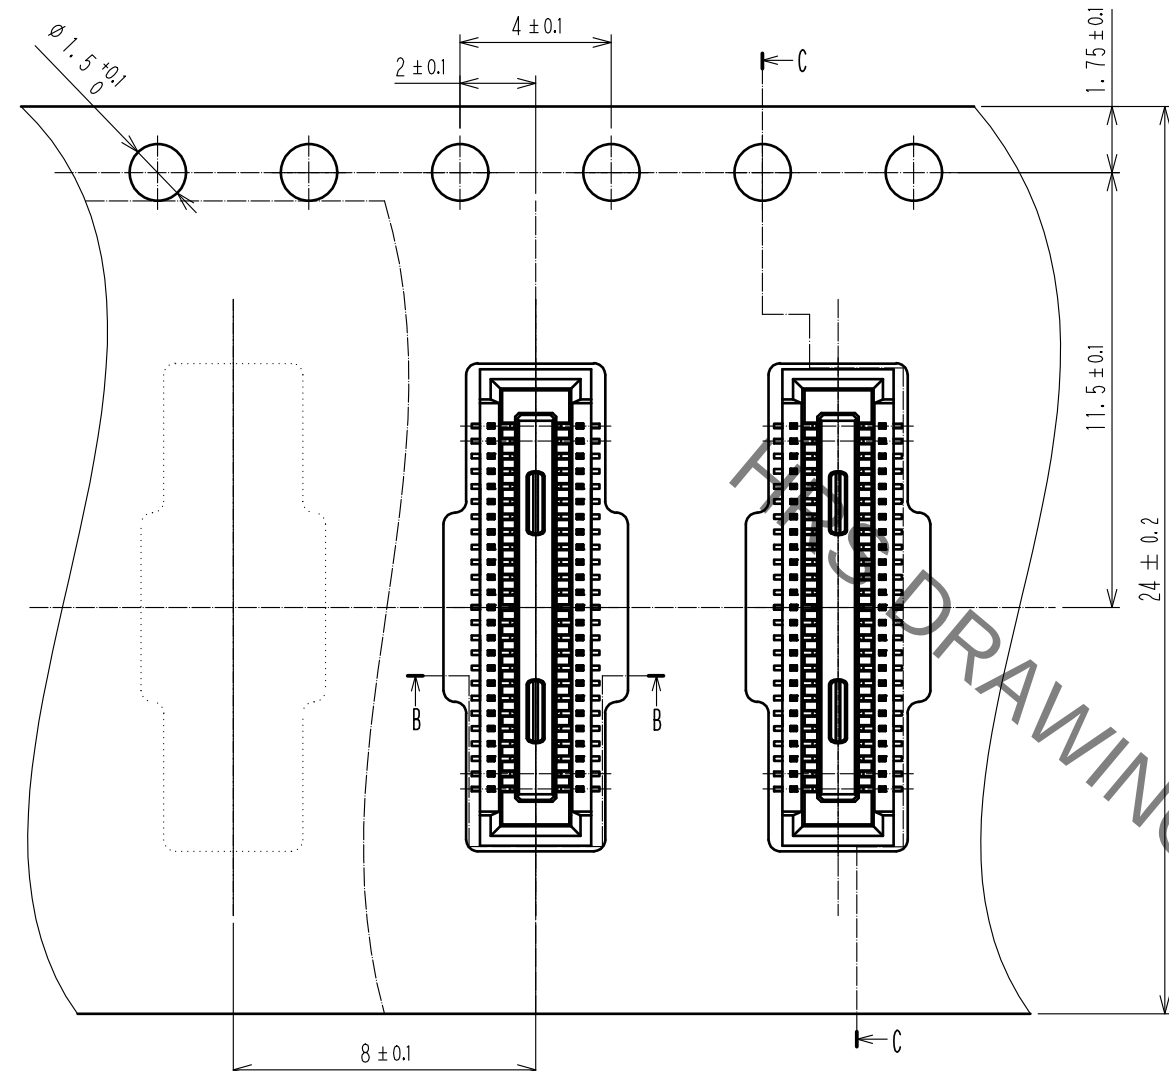



C-C(5:1)

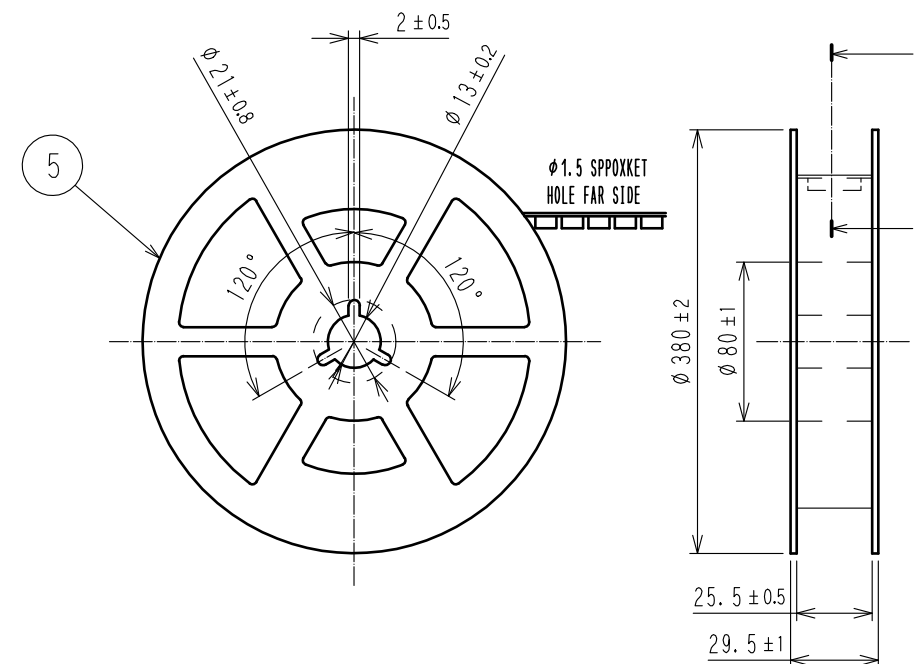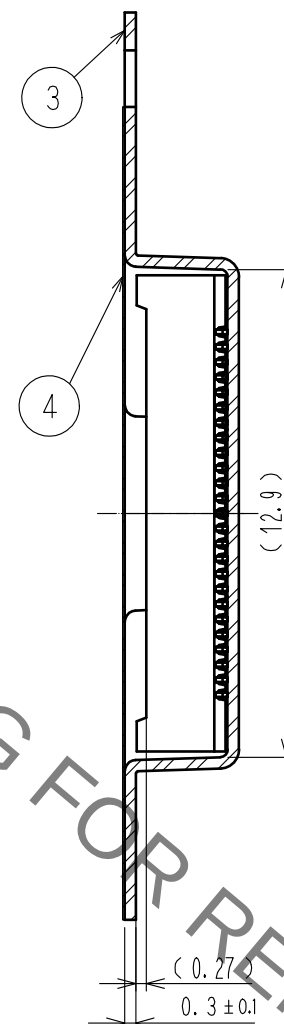

D-D(FREE)

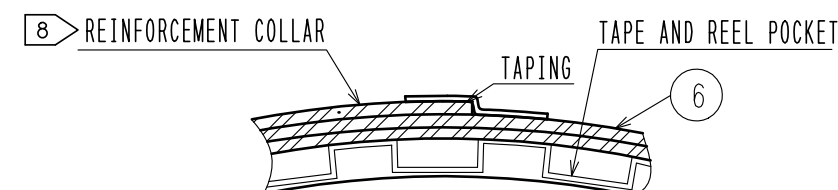

DIRECTION OF UNREELING →

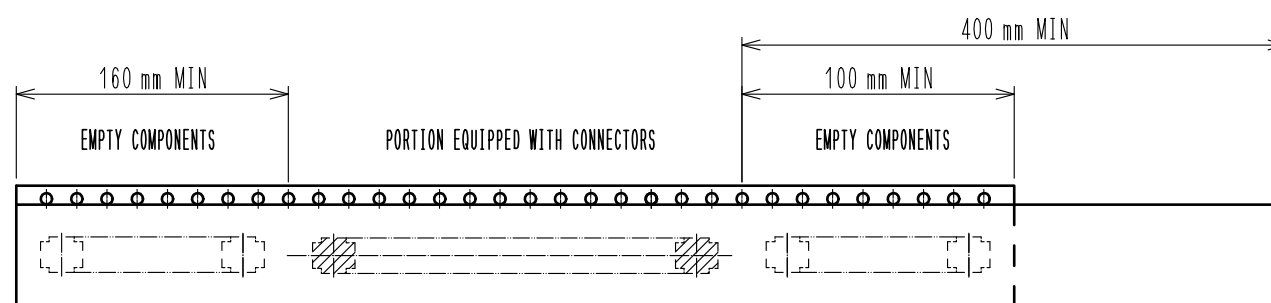

TRAILER

7 TAPING

LEADER

- NOTES)
- PER REEL 1000 CONNECTORS.
 - THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
 - REFER TO JIS C 0806(PACKING OF COMPONENTS FOR AUTOMATIC HANDLING)
 - AFTER PACKAGING, ROLL 2 METERS OF THE REINFORCEMENT COLLAR TO OUTER CIRCUMFERENCE OF TAPE AND REEL POCKET, AND TAPE DOWN AT THE END THE COLLAR.

HRS

DRAWING NO.	EDC-389547-58-00
PART NO.	DF40TC(2.5)-50DS-0.4V(58)
CODE NO.	CL0684-4279-0-58

2/2