

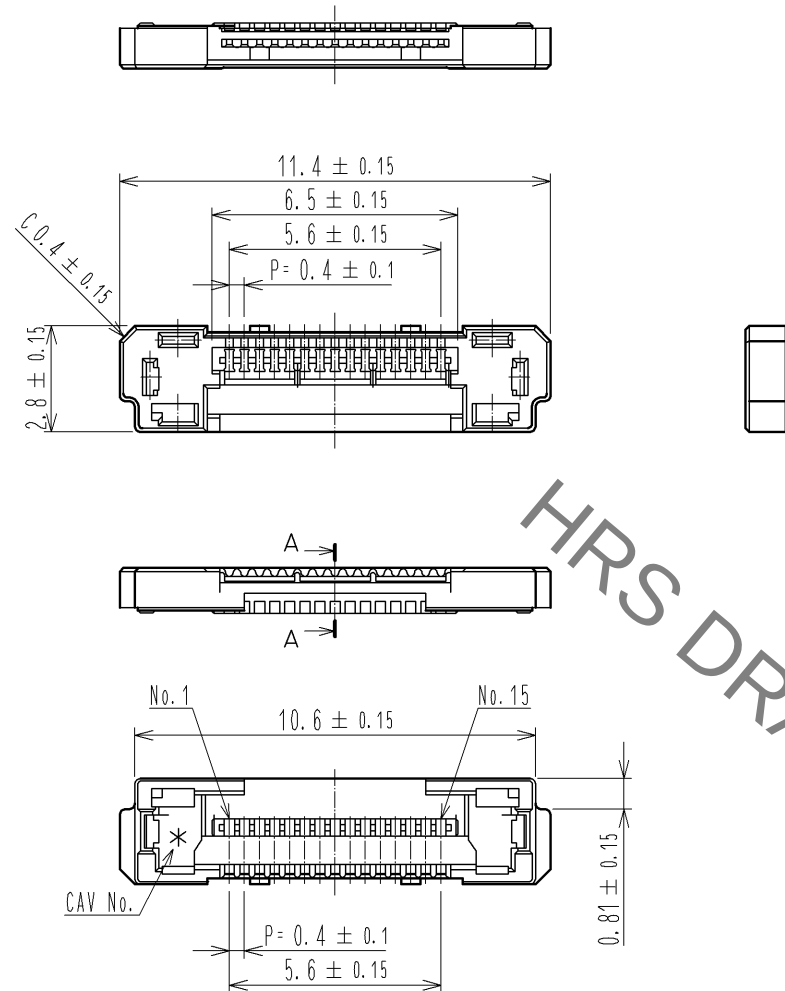



Jan.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

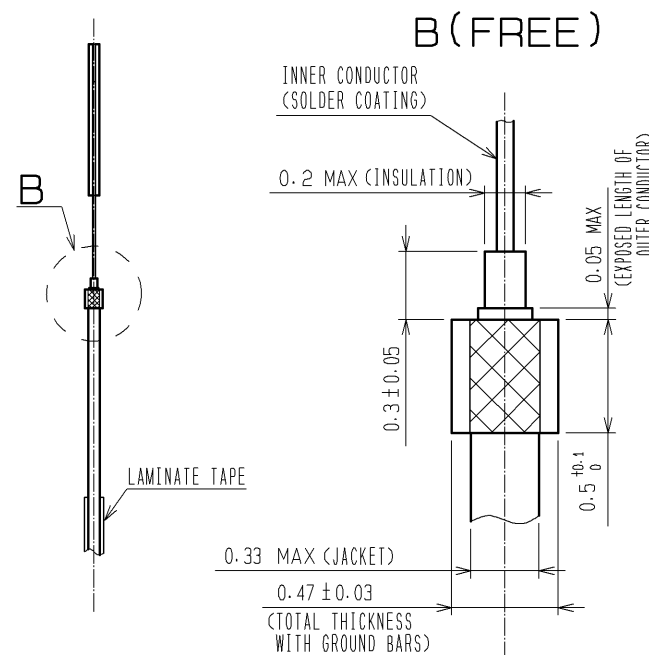


RECOMMENDED CABLE SUBASSEMBLY

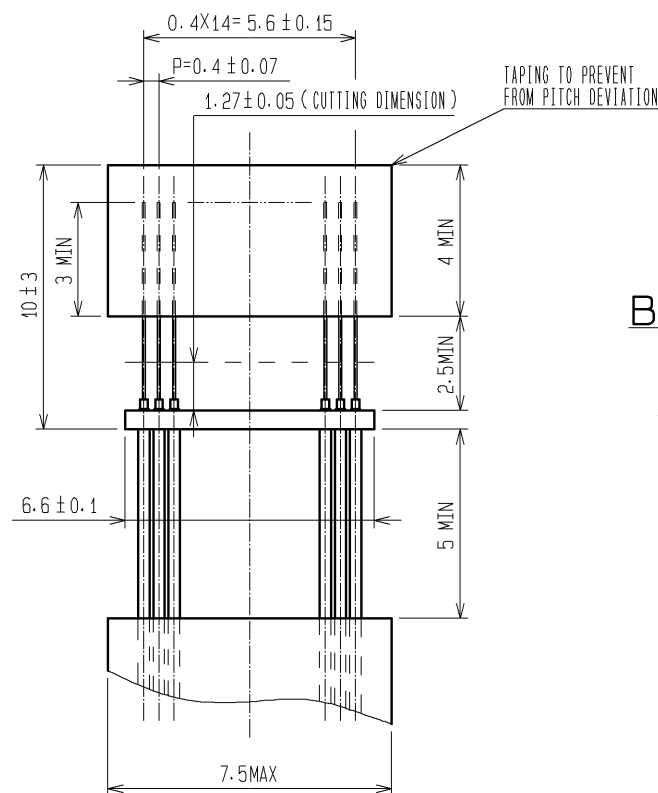

A-A (FREE)

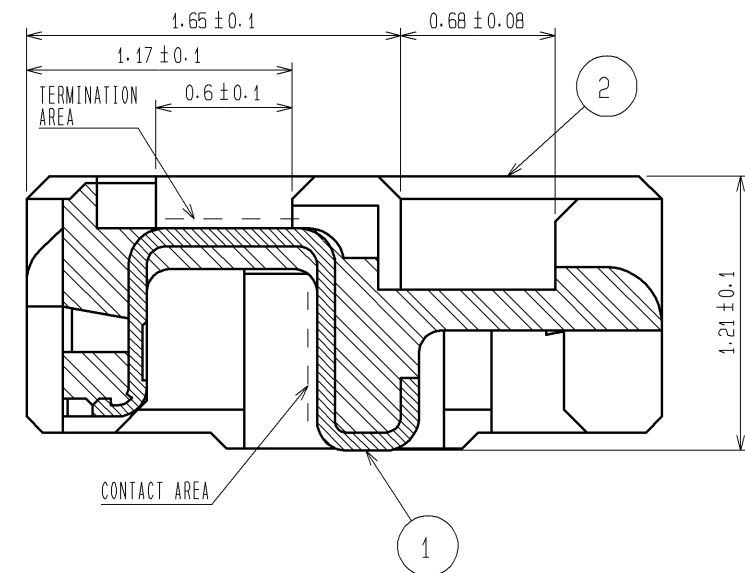


CABLE TERMINATION FIGURE (FREE)

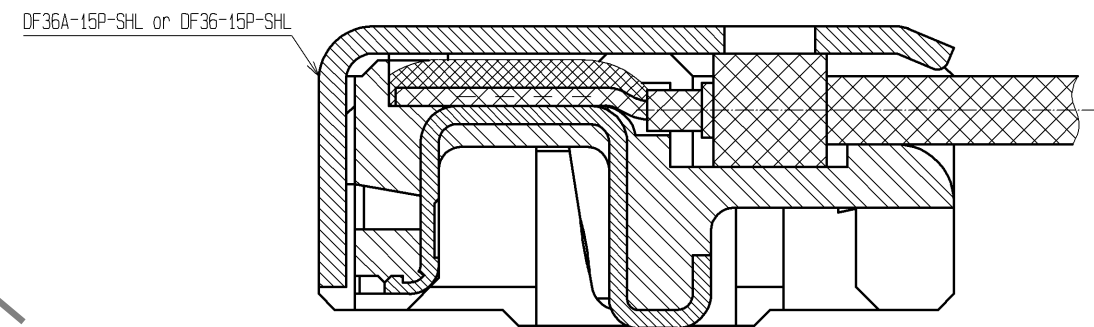

- NOTES 1. APPLICABLE CABLE: THIN COAXIAL CABLE (AWG#42-AWG#46)
2. THIS CONNECTOR IS NOT HOT PLUGGABLE. MATE AND UNMATE WHILE THE POWER IS OFF.
3. THE ASSEMBLY IS COMPLETED BY COMBINING TWO PARTS "CONNECTOR UNIT AND METAL SHIELDING". REFER TO THE TABLE FOR EACH ITEM No., PART NAME, PART No. AND CODE No. APPLICABLE SHELL IS DIFFERENT DEPENDING ON THE PART No. OF MATED CONNECTOR. USE DF36A-15P-SHL FOR DF36A-15S-0.4V(**), USE DF36-15P-SHL FOR DF36-15S-0.4V(**).

ITEM No.	PART NAME	PART No.	CODE No.
1, 2	CONNECTOR UNIT	DF36C-15P-0.4SD(51)	CL662-4035-2-51
-	METAL SHIELDING	DF36A-15P-SHL	CL662-4511-7-00
-	METAL SHIELDING	DF36-15P-SHL	CL662-4526-1-00

4. BLACK MARKS MAY OCCASIONALLY OCCUR IN MOLD RESIN, YET THEY NOT AFFECT CONNECTOR QUALITY.

2	LCP	UL94V-0 • BEIGE		2	PS	BLACK			
1	PHOSPHOR BRONZE	CONTACT AREA : Au PLATING 0.1μm min		4	POLYESTER	CLEAR			
		TERMINATION AREA : Au PLATING 0.1μm min		3	PS	CLEAR			
		UNDER PLATING : Ni PLATING 1μm min							
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS			
UNITS mm		SCALE 5 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
				APPROVED : TS. SAKATA	11.11.08	DRAWING NO. EDC3-320250-01			
				CHECKED : HS. OZAWA	11.11.08	PART NO. DF36C-15P-0.4SD(51)			
				DESIGNED : TP. MATSUMOTO	11.11.07	CODE NO. CL662-4035-2-51			
				DRAWN : TP. MATSUMOTO	11.11.07	 1			

