



# ENCLOSED YAGI ANTENNA

YE490012. YE240015\*\*

## 4.9-5.8 GHZ AND 2.4 GHZ FULLY ENCLOSED YAGI ANTENNAS

Laird's fully-enclosed Yagi antennas are the indoor solution for point-to-point Wi-Fi transmissions. Designed and constructed with superior materials and components, these antennas will provide years of uninterrupted performance.

## FEATURES AND BENEFITS ✓ROHS

- High-gain antenna compatible with 300 watts maximum power
- 150-mph rated wind velocity for outdoor installation
- Indoor/outdoor mounting options
- Includes two (2) U-bolts and brackets for easy mast mounting


#### **MARKETS**


- Wi-Fi applications
- Corporate or in-campus wireless communication networks

## **SPECIFICATIONS**

PART #	YE490012	YE240015**
Frequency Range	49000-5850MHz	2400-2485MHz
VSWR	≤ 2:1	≤ 2:1
Nominal Impedance	50 Ω	50 Ω
Gain	10 dBi	14.5 dBi
Polarization	Vertical Horizontal	Vertical Horizontal
Pattern	Directional	Directional
Azimuth Beamwidth	23º	20°

PART #	YE490012	YE240015**
Elevation Beamwidth	27º	18º
Tuning	Fixed	None required
Mounting	Two U-bolts and brackets for mast mountng	Two U-bolts and brackets for mast mounting
Length	9.25 inches	17.6 inches
Weight	1.15 lbs	1.51 lbs
Cable Type	ATX195 Dual Shield low loss Coaxial Cable	ATX195 Dual Shield low loss Coaxial Cable
Termination	N-Female Connector	N-Female Connector

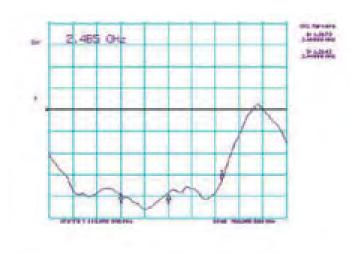

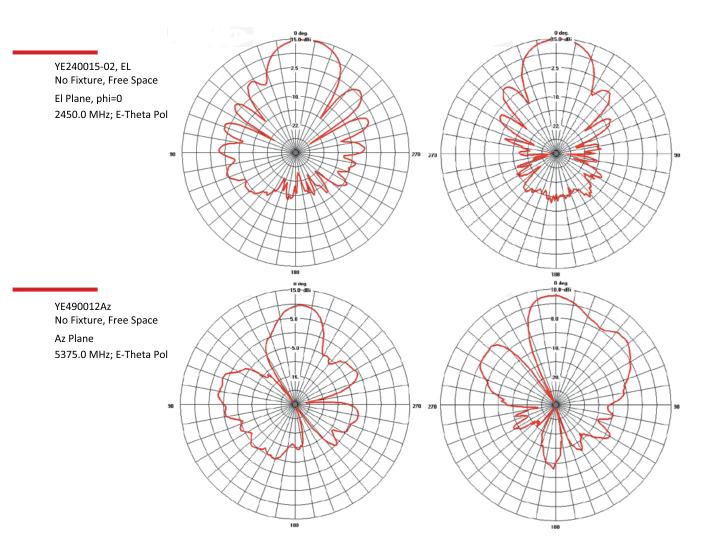

#### TE TECHNICAL SUPPORT CENTER

USA: +1 (800) 522-6752 Canada: +1 (905) 475-6222 +52 (0) 55-1106-0800 Mexico: Latin/S. America: +54 (0) 11-4733-2200 Germany: +49 (0) 6251-133-1999 +44 (0) 800-267666 UK: +33 (0) 1-3420-8686 France: Netherlands: +31 (0) 73-6246-999 China: +86 (0) 400-820-6015

#### te.com

TE Connectivity, TE Connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

©2021 TE Connectivity. All Rights Reserved.

12/21 Original

