
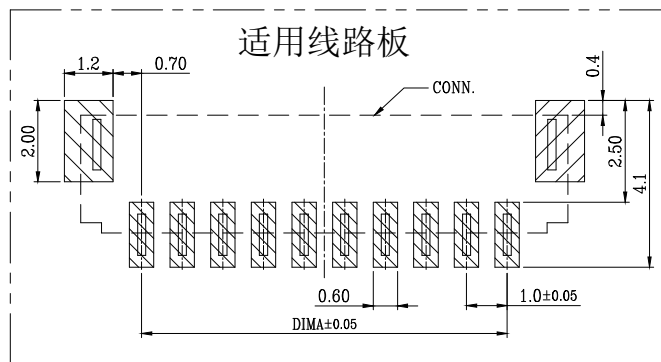


SECTION A-A

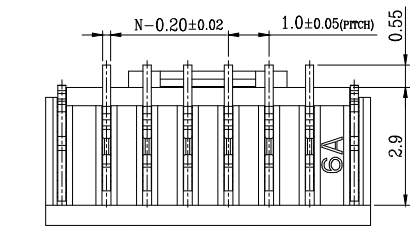

**SPECIFICATIONS**

1. Current Rating: 1A AC, DC
2. Voltage Rating: 50V AC, DC
3. Temperature Range: -25°C~+85°C
4. Contact Resistance: 20mΩ Max
5. Insulation Resistance: 100MΩ Min
6. Withstanding Voltage: 500V AC/minute
7. Material: Wafer LCP, UL94V-0  
PIN Phosphoric bronze Tin-plated  
Solder tad Phosphoric bronze Tin-plated

Circuit	Part NO.	Dimensions mm		
		A	B	C
2	HC-G1.0-2PLT	1.00	2.50	4.00
3	HC-G1.0-3PLT	2.00	3.50	5.00
4	HC-G1.0-4PLT	3.00	4.50	6.00
5	HC-G1.0-5PLT	4.00	5.50	7.00
6	HC-G1.0-6PLT	5.00	6.50	8.00
7	HC-G1.0-7PLT	6.00	7.50	9.00
8	HC-G1.0-8PLT	7.00	8.50	10.00
9	HC-G1.0-9PLT	8.00	9.50	11.00
10	HC-G1.0-10PLT	9.00	10.50	12.00
11	HC-G1.0-11PLT	10.00	11.50	13.00
12	HC-G1.0-12PLT	11.00	12.50	14.00
13	HC-G1.0-13PLT	12.00	13.50	15.00
14	HC-G1.0-14PLT	13.00	14.50	16.00
15	HC-G1.0-15PLT	14.00	15.50	17.00
16	HC-G1.0-16PLT	15.00	16.50	18.00
17	HC-G1.0-17PLT	16.00	17.50	19.00
18	HC-G1.0-18PLT	17.00	18.50	20.00
19	HC-G1.0-19PLT	18.00	19.50	21.00
20	HC-G1.0-20PLT	19.00	20.50	22.00
22	HC-G1.0-22PLT	21.00	22.50	24.00
24	HC-G1.0-24PLT	23.00	24.50	26.00
26	HC-G1.0-26PLT	25.00	26.50	28.00

			GENERAL TOLERANCE		制 图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM	TOL	审 核 CHECK					
			X.X	±0.30	批 准 APPROVAL		产品名称 TITLE	1.00 Pitch 立贴 带钩	版本 REV.	A
			X.XX	±0.20	比 例 SCALE		产品料号 PART NO.	HC-G1.0-NPLT	单 位 UNITS	mm
			X.XXX	±0.10	投 影 Projection		材 料 MATERIAL		页 次 SHEET	1/1
			Angle	±3.0°						
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE								